

Description

The BP2882 is an internal integrated high-voltage power supply, two way buck LED driver with wall switch color dimming, and is suitable for 85Vac~265Vac universal input offline LED lighting.

The BP2882 can detect three switch status by DET pin, cold, warm, mixed color.

The BP2882 operates in critical conduction mode, the output current does not change with the inductance and LED output voltage, and it achieves high precision output current control, and excellent line regulation and load regulation.

The BP2882 offers rich protection functions, including LED open/ short Protection, VCC under voltage protection, thermal shutdown function

The BP2882 is available in SOP-16 package

Features

- Integrated DET Switch Detection Circuit
- Internal 700V Power MOSFET
- Wide Input Voltage
- $\pm 5\%$ LED Output Current Accuracy
- LED Open Protection
- LED Short Protection
- VCC Under Voltage Protection
- Thermal Shutdown Function
- Available in SOP-16 Package

Applications

- LED Ceiling Lamp
- LED Panel Lighting
- LED Bulb
- Other LED Lighting

Typical Application

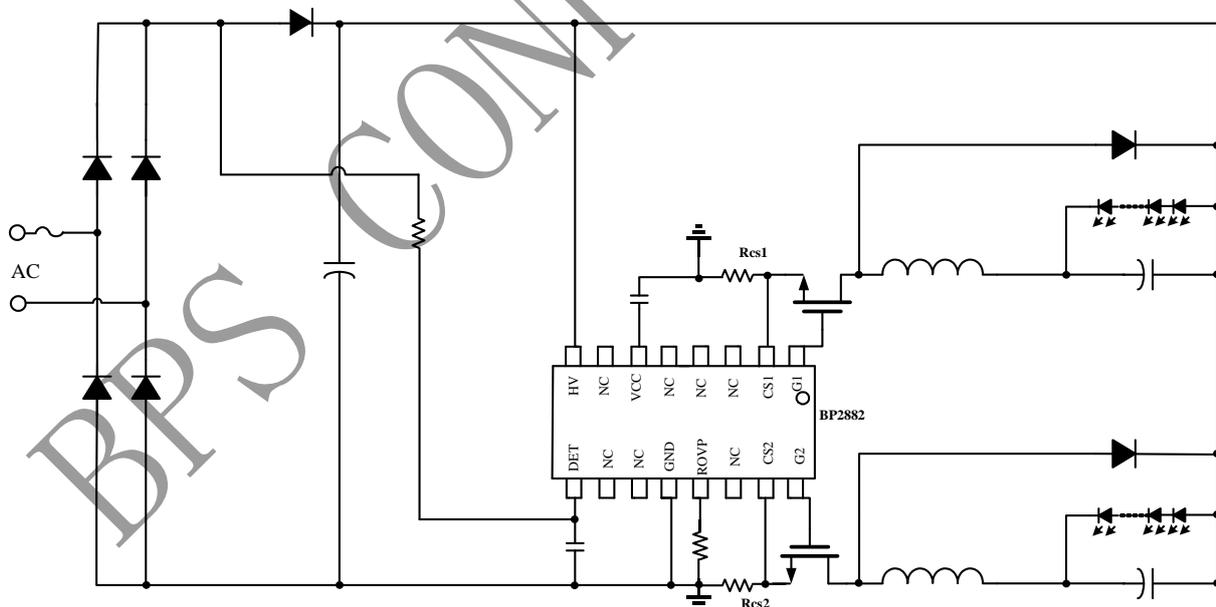


Figure 1. Typical application circuit for BP2882

Ordering Information

Part Number	Package	Operating Temperature	Packing Method	Marking
BP2882	SOP-16	-40 °C to 105 °C	3000pcs/Reel	BP2882 XXXXXY YYY

Pin Configuration and Marking Information

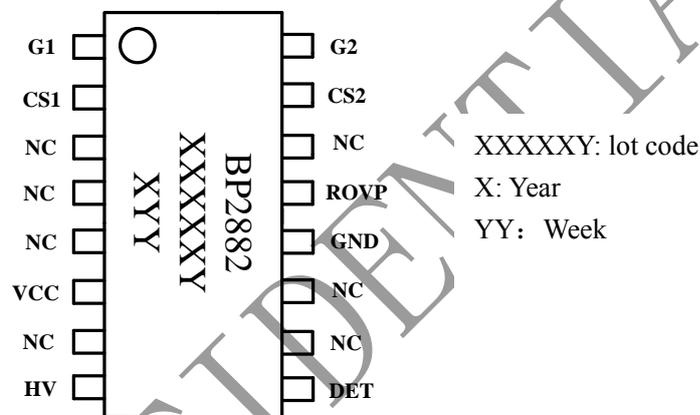


Figure 2. Pin configuration

Pin Definition

Pin No.	Name	Description
1	G1	Internal BUCK controller2, external MOS Gate
2	CS1	Current sense pin1. Connect a sense resistor between this pin and GND pin.
3, 4, 5, 7, 10, 11, 14	NC	No Connection
6	VCC	Power supply pin
8	HV	High-voltage power supply pin
9	DET	Switch state detection pin
12	GND	Ground
13	ROVP	Over-voltage setting pin voltage
15	CS2	Current Sense Pin2. Connect a sense resistor between this pin and GND pin.
16	G2	Internal BUCK controller2 , external MOS Gate



Absolute Maximum Ratings (note1)

Symbol	Parameters	Range	Units
HV	High-voltage power supply pin	-0.3~600	V
CS1, CS2	Current sense pin	-0.3~6	V
G1, G2	MOS gate drive pin	-0.3~20	V
ROVP	Over voltage protection setting pin	-0.3~6	V
DET	Switch state detection pin	-0.3~8.5	V
DET	Switch state detection pin, clamp current	10	mA
P _{DMAX}	Power dissipation (note 2)	0.85	W
θ_{JA}	Thermal resistance (Junction to Ambient)	90	°C/W
T _J	Operating junction temperature	-40 to 150	°C
T _{STG}	Storage temperature range	-55 to 150	°C

Note 1: Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. Under “recommended operating conditions” the device operation is assured, but some particular parameter may not be achieved. The electrical characteristics table defines the operation range of the device, the electrical characteristics is assured on DC and AC voltage by test program. For the parameters without minimum and maximum value in the EC table, the typical value defines the operation range, the accuracy is not guaranteed by spec.

Note 2: The maximum power dissipation decrease if temperature rise, it is decided by T_{JMAX}, θ_{JA} , and environment temperature (T_A). The maximum power dissipation is the lower one between $P_{DMAX} = (T_{JMAX} - T_A) / \theta_{JA}$ and the number listed in the maximum table.



晶丰明源半导体

BP2882

Non-isolation Two Way Buck LED Driver
With Wall Switch Color Dimming

Electrical Characteristics (Notes 3, 4) (Unless otherwise specified, $V_{CC}=9\text{ V}$, $T_A=25\text{ }^\circ\text{C}$)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Supply Voltage Section						
V_{CC_HIGH}	V_{CC} Operating Voltage			9.9		V
V_{CC_LOW}	V_{CC} Operating Voltage			9.5		V
V_{CC_ON}	V_{CC} Turn On Threshold	V_{CC} Rising		8.9		V
V_{CC_UVLO}	V_{CC} Turn off Threshold	V_{CC} Falling		7.45		V
I_{CC}	V_{CC} Operating Current	$F_{SW}=2.5\text{kHz}$		300		μA
Current Sense Section						
V_{CS_TH}	Threshold Voltage for Peak Current Limit		388	400	412	mV
T_{LEB}	Leading Edge Blanking Time for Current Sense			500		ns
T_{DELAY}	Switch Off Delay Time			200		ns
Internal Time Control Section						
T_{OFF_MIN}	Minimum OFF Time			1.6		μs
T_{ON_MAX}	Maximum On Time			40		μs
T_{OFF_MAX}	Maximum OFF Time			420		μs
T_{LEB_CS}	Leading Edge Blanking Time for Current Sense			0.5		μs
T_{ZCD_MASK}	Demagnetization Detection Masking Time			1.6		μs
T_{OVP_RST}	OVP Reset Time			280		ms
Driver Section						
I_{SOURCE_MAX}	Maximum Sourcing Current			180		mA
I_{SINK_MAX}	Maximum Sinking Current			600		mA
Thermal Regulation Section						
T_{SD}	Thermal Protection			150		$^\circ\text{C}$
Switch Detection Section						
V_{DET_L2H}	DET High Level Detection			7		V
V_{DET_H2L}	DET LOW Level Detection			3.5		V
V_{DET_CLR}	DET Reset			0.5		V
V_{DET_CLAMP}	DET Clamp	5mA		7.5		V



晶丰明源半导体

BP2882

Non-isolation Two Way Buck LED Driver
With Wall Switch Color Dimming

I _{DET_PD}	DET Sinking Current	DET>3.5V		600		uA
I _{DET_HOLD}	DET Holding Current	3.5V>DET>0.5V		5		uA

Note 3: production testing of the chip is performed at 25°C.

Note 4: the maximum and minimum parameters specified are guaranteed by test, the typical value are guaranteed by design, characterization and statistical analysis

BPS CONFIDENTIAL

Internal Block Diagram

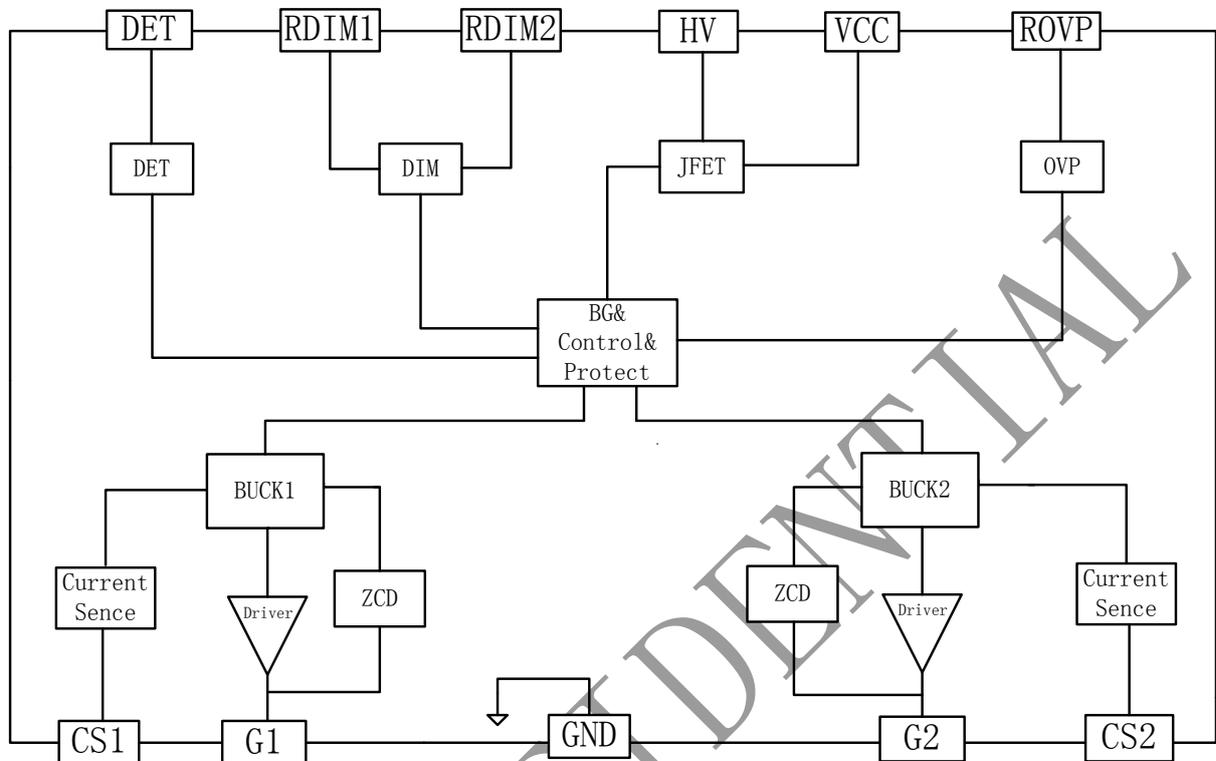


Figure 3. BP2882 Internal Block Diagram

Application Information

The BP2882 is an Internal integrated high-voltage power supply, two way buck LED driver with wall switch color dimming, and is suitable for 85Vac~265Vac universal input offline LED lighting.

The BP2882 can detect three switch status by DET pin, cold, warm, mixed color.

Start Up

After system powered up, the Vcc pin capacitor is charged up by internal HV JEFT. When the VCC pin voltage reaches the turn on threshold, the internal circuits start operating.

When the Vcc voltage is higher than Vcc_high, system will turn off the JFET and stop charging.

When the Vcc voltage is lower than Vcc_low, system will turn on the JFET and charge the Vcc.

Constant Current Control

Cycle by cycle current sense is assembled in BP2882, the CS1/CS2 pin is connected to the current sense comparator, and the voltage on CS1/SC2 pin is compared with the internal 400mV reference voltage. The MOSFET will be switched off when the voltage on CS1/CS2 pin reaches the threshold. The CS1/CS2 comparator includes a 500ns leading edge blanking time.

The peak inductor current is given by:

$$I_{PK} = \frac{400}{R_{CS}} (mA)$$

Where, Rcs is the current sense resistor value.

The current in LED can be calculated by the equation:

$$I_{LED} = \frac{I_{PK}}{2}$$



晶丰明源半导体

BP2882

Non-isolation Two Way Buck LED Driver With Wall Switch Color Dimming

Where, I_{PK} is the peak current of the inductor.

Inductor Selection

The BP2882 works under inductor current critical conduction mode. When the power MOSFET is switched on, the current in the inductor rises up from zero, the on time of the MOSFET can be calculated by the equation:

$$t_{on} = \frac{L \times I_{PK}}{V_{IN} - V_{LED}}$$

Where,

L is the inductance value

V_{IN} is the DC bus voltage after the rectifier bridge

V_{LED} is the voltage on the LED

After the power MOSFET is switched off, the current in the inductor decreases. When the inductor current reaches zero, the power MOSFET is turned on again by IC internal logic. The off time of the MOSFET is given by:

$$t_{off} = \frac{L \times I_{PK}}{V_{LED}}$$

The inductance can be calculated by the equation:

$$L = \frac{V_{LED} \times (V_{IN} - V_{LED})}{f \times I_{PK} \times V_{IN}}$$

The f is the system switching frequency, which is proportional to the input voltage. So the minimum switching frequency is set at lowest input voltage, and the maximum switching frequency is set at highest input voltage.

The minimum and maximum off time of BP2882 is set at 1.6us and 420us, respectively. Referring to the equation of t_{OFF} calculation, if the inductance is too small, the t_{OFF} may be smaller than the minimum off time, system will operate in discontinuous conduction mode and the output current will be smaller than the designed value. If the inductance is too large, the t_{OFF} may be larger than the maximum off time, the system

will operate in continuous conduction mode and the output current will be higher than the designed value. So it is important to choose a proper inductance.

Wall Switch Color Dimming

BP2882 have three modes: (shown in the table), by ON/OFF the wall switch, the status can vary from mode1 to mode3. In mode 3, output current can be set by RDID1/RDIM2. (shown in the table). The initial status of BP2882 is mode 1. After startup, the wall switch ON/OFF times determines the working status, the BP2882 will cycle around mode 1, 2, 3. When the DET voltage drops below 0.5V or the VCC voltage falls below UVLO, the BP2882 will be reset. The next time it turns on, the BP2882 return to the default initial mode 1.

After the DET increases to 7V, the system starts to operate. When the DET drops to 3.5V, the switch is detected to be off and the DET pull-down current is 5uA. When the DET voltage falls below 0.5V, BP2882 will be reset. The BP2882 will switch to the next mode if the wall switch turns off during the memory time.

Mode selection:

MODE	BUCK1	BUCK2
1	ON	OFF
2	OFF	ON
3	ON	ON

Over Voltage Protection

The over voltage protection can be programmed by the ROVP pin resistor. The ROVP pin current is 50uA.

When the LED is open circuit, the output voltage increases gradually, and the demagnetization time gets shorter. The demagnetization time at OVP--- T_{ovp} can be calculated by the open circuit protection voltage:



晶丰明源半导体

BP2882

Non-isolation Two Way Buck LED Driver With Wall Switch Color Dimming

$$T_{ovp} \approx \frac{L \times V_{cs}}{R_{cs} \times V_{ovp}} \quad (\mu s)$$

Where,

V_{cs} is the CS pin turn off threshold (400mV)

V_{ovp} is the open circuit protection voltage

And then the R_{ovp} resistor value can be calculated by the equation:

$$R_{ovp} \approx \frac{100}{T_{ovp}} * 10^{-3} \quad (\text{kohm})$$

Protection Function

The BP2882 offers rich protection functions to improve the system reliability, including LED open/short protection, V_{CC} under voltage protection, thermal regulation. When the LED is open circuit, the system will trigger the over voltage protection and stop switching. The system will wait 280ms and then re-switch

When the LED short circuit is detected, the system works at low frequency (2.5kHz). So the system power consumption is very low.

The BP2882 integrates overheat protection function. When the system is over temperature, it will stop the switch. So the reliability is improved. The shutdown temperature is set to 150°C internally, hysteresis of 20 degrees

PCB Layout

The following rules should be followed in BP2882 PCB layout:

Bypass Capacitor

The bypass capacitor on V_{CC} pin should be as close as possible to the V_{CC} Pin and GND pin.

ROVP Pin

The ROVP resistor should be as close as possible to

the ROVP Pin.

Ground Path

The power ground path for current sense should be short, and the power ground path should be separated from small signal ground path before connecting to the negative node of the bulk capacitor.

The Area of Power Loop

The area of main current loop should be as small as possible to reduce EMI radiation, such as the inductor, the power MOSFET, the output diode and the bus capacitor loop.

Drain Pin

To increase the copper area of DRAIN pin for better thermal dissipation. However too large copper area may compromise EMI performance.







晶丰明源半导体

BP2882

**Non-isolation Two Way Buck LED Driver
With Wall Switch Color Dimming**

Physical Dimensions

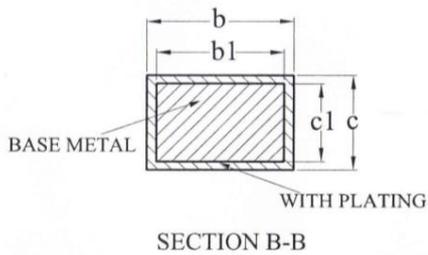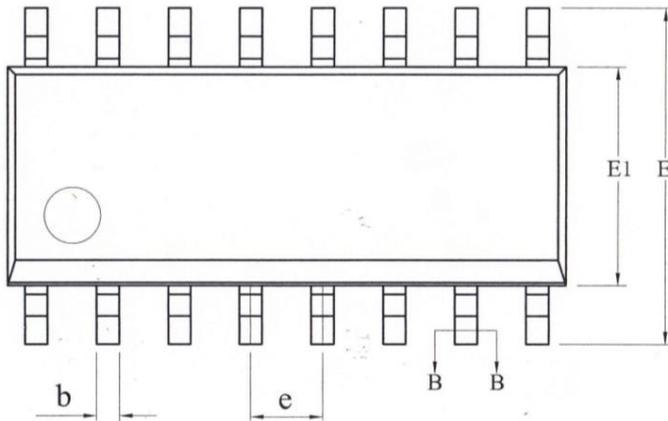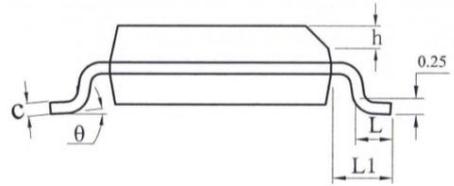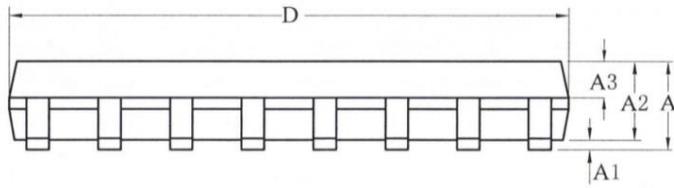

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.75
A1	0.10	—	0.225
A2	1.30	1.40	1.50
A3	0.60	0.65	0.70
b	0.39	—	0.48
b1	0.38	0.41	0.44
c	0.20	—	0.25
c1	0.19	0.20	0.21
D	9.80	9.90	10.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27BSC		
h	0.25	—	0.50
L	0.50	—	0.80
L1	1.05REF		
θ	0	—	8°

- ⚠
- ⚠
- ⚠
- ⚠