
WH2004L Character 20x4

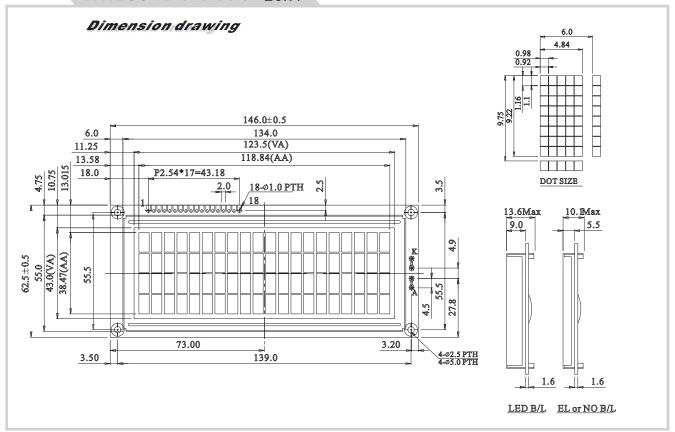

Feature

- 1. 5x8 dots includes cursor
- 2. Built-in controller (ST 7066 or Equivalent)
- 3. +5V power supply (Also available for +3V)
- 4.1/16 duty cycle
- 5. LED can be driven by pin1,pin2,pin15,pin16 or A and K
- 6. N.V. optional for +3V power supply

Pin NO.	Symbol	Function						
1	Vss	GND						
2	Vdd	+3V or +5V						
3	Vo	Contrast Adjustment						
4	RS	/L Register select signal						
5	R/W	H/L Read / write signal						
6	E	H→L Enable signal						
7	DB0	H/L Data bus line						
8	DB1	H/L Data bus line						
9	DB2	H/L Data bus line						
10	DB3	H/L Data bus line						
11	DB4	H/L Data bus line						
12	DB5	H/L Data bus line						
13	DB6	H/L Data bus line						
14	DB7	H/L Data bus line						
15	Α	Power supply for LED 4.2 V						
16	К	Power supply for B/L (0V)						
17	NC/Vee	NC or Negative Voltage output						
18	NC	No connection						

Mechanical Data

Item	Standard Value	Unit
Module Dimension	146x62.5	mm
Viewing Area	123.5x43.0	mm
Mounting hole	139.0 x 55.5	mm
Character Size	4.84 x 9.22	mm

Absolute Maximum Rating

Item	Cumbal	Stan	11			
item	Symbol	min.	typ.	max.	Unit	
Power Supply	VDD-VSS	-0.3		7.0	٧	
Input Voltage	VI	-0.3		VDD	V	

Note: VSS=0 Volt. VDD=5.0 Volt.

Electronical Characteristics

Electionical onalacteristics								
Item	Symbol	Condition	Stan					
Item	Syllibol	Condition	min.	typ.	max.	Unit		
Innut Valtage	VDD	VDD=+5V	4.7	5.0	5.3	٧		
Input Voltage	VDD	VDD=+3V	2.7	3.0	5.3	٧		
Supply Current	IDD	VDD=5V		8.0	10.0	mA		
		-20°C	5.0	5.1	5.7	.7 V		
Recommended LC Driving	VDD-V0	o°C	4.6	4.8	5.2			
Voltage for Normal Temp.		25°C	4.1	4.5	4.7			
Version module		50°C	3.9	4.2	4.5			
		70°C	3.7	3.9	4.3			
LED Forward Voltage	VF	25°C		4.2	4.6	V		
LED Forward Current	ard Current IF 25°C			540	1080	mA		
EL Power Supply Current	IEL	Vel=110VAC;400Hz			5.0	mA		

Display Character Address Code:

Dis	play	position
DD	RAM	Address
DD	RAM	Address

DD RAM Address	Display position	1 2	3 4	5 6	6 7	8	9 10	11 1	2 13	 20
DD RAM Address 14 15 27		00 01		ГΪ	Ť	Ĭ	T	ГΤ		13
	DD RAM Address	40 41								53
DD DAM Addross [54]55		14 15								27
DD RAIM Address [54]55]	DD RAM Address	54 55								67

