

## TPS92550 450mA 14W Constant Current Buck LED Driver Micro-Module

Check for Samples: [TPS92550](#)

### FEATURES

- Integrated all Power Components Including the Power Inductor
- Wide Input Voltage Range : 4.5V–36V
- Constant Switching Frequency at 400kHz
- High Contrast Ratio (Minimum dimming current pulse width < 16 $\mu$ s)
- Drives up to 10 LEDs in Series at 36V Input
- $\pm$ 3.6% Typical LED Current Accuracy
- LED Current Adjustable from 300mA to 450mA
- Up to 96% Efficiency
- TPS92550 Modules can be Connected in Parallel for Higher Current Operation
- Input Under-Voltage Lock-Out (UVLO)
- Compatible with Ceramic and Low ESR Capacitors
- Low Electro Magnetic Interference(EMI) Complies with EN55015 Standard <sup>(1)</sup>
- LED Open and Short Circuit Protections
- Thermal Shutdown and RoHS Compliant
- –40°C to +125°C Junction Temperature Range

### APPLICATIONS

- General Lighting, Desk Lamps
  - Cabinet Lamps, Decorative Lamps
  - Street Lamps
- Architecture Lighting, Recess Lights
  - Spot Lights
  - Underwater Lights

### PACKAGE HIGHLIGHTS


- 7 Lead Easy-to-use Package (Similar to TO-263)
- Single Exposed Die Attach Pad for Enhancing Thermal Performance
- 10.2 x 13.8 x 4.6 mm Package

<sup>(1)</sup> EN55015, refer to [Figure 36](#) and [Figure 37](#)

### DESCRIPTION

The TPS92550 Constant Current Buck LED Driver Micro-Module drives maximum 450mA LED current up to 10 LEDs in a single string (maximum 14W). It integrates all the power components including the power inductor. The TPS92550 provides a full turn-key, highly efficient solution for wide range of single string LED lighting applications with up to 96% power efficiency. It accepts an input voltage ranging from 4.5V to 36V and delivers a 350mA LED current as default. The LED current is adjustable from 300mA to 450mA by changing a single external resistor.


The module operates at constant switching frequency (400kHz) with low Electro Magnetic Interference (EMI) complying with EN55015 standard. The module has fast control loop to realize fine LED current pulse yielding 256-step PWM dimming resolution at 240Hz for general lighting. Protection feature include thermal shutdown, input under-voltage lockout, LED open-circuit and short-circuit protections. The TPS92550 Micro-Module is available in 7-pin PFM power package.

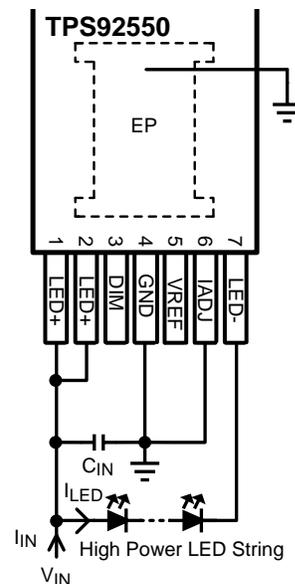
**Figure 1. Typical Application Circuit**



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.


**SYSTEM PERFORMANCE**

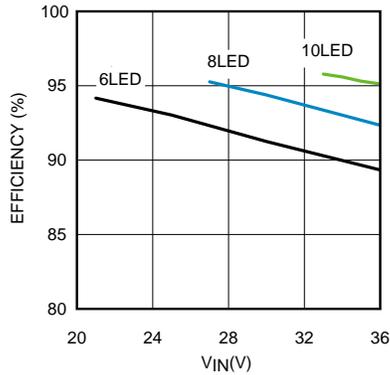

**Figure 2. Efficiency vs V<sub>IN</sub>, I<sub>LED</sub> = 350mA**

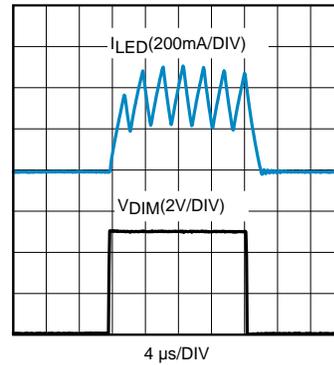


**Figure 3. LED Current with PWM Dimming 16μs Dimming Pulse**

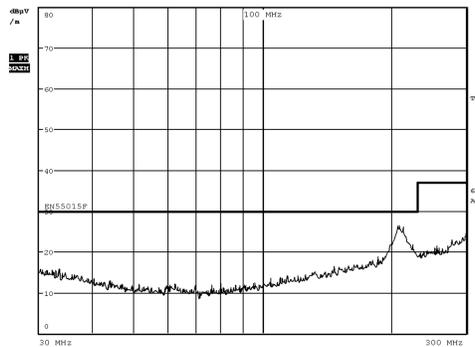

**Figure 4. Radiated Emissions (EN 55015)**


**Easy to Use 7-Pin Package**

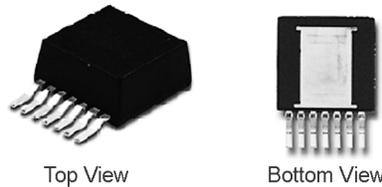

(1)  $\theta_{JA}$  measured on a 1.705" x 3.0" four layer board, with one ounce copper, thirty five 12 mil thermal vias, no air flow, and 1W power dissipation.

**Figure 5. 7-Pin PFM Package  
10.16 x 13.77 x 4.57 mm (0.4 x 0.39 x 0.18 in)  
 $\theta_{JA} = 20^{\circ}\text{C/W}$ ,  $\theta_{JC} = 1.9^{\circ}\text{C/W}^{(1)}$   
RoHS Compliant**

## CONNECTION DIAGRAM

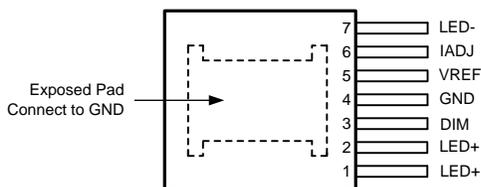

**Figure 6. 7-Pin PFM (Top View)  
See NDW0007A Package**

### PIN DESCRIPTIONS

| Pin Number | Name        | Description            | Function  |
|------------|-------------|------------------------|---|
| 1,2        | LED+        | Anode of LED string    | Supply input and rail connection to the anode of the LED string.  |
| 3          | DIM         | Dimming signal input   | Dimming control signal input. Open to enable or apply logic level PWM signal to control the brightness of the LED string.                   |
| 4          | GND         | Ground                 | Reference point for all stated voltages. Connect to the exposed pad of the package externally.  |
| 5          | VREF        | Voltage reference      | Internal voltage reference output.  |
| 6          | IADJ        | LED current adjustment | Fine tuning of the LED current by connecting a resistor between this pin and ground. Connect this pin to ground for factory preset current. |
| 7          | LED-        | Cathode of LED string  | The current return pin of the LED string, connect to the cathode of the LED string.   |
| EP         | Exposed Pad | Exposed thermal pad    | Used to dissipate heat from the package during operation. Must connect to GND directly.   |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

|                                       | VALUE / UNITS                 |
|---------------------------------------|-------------------------------|
| LED+, LED- to GND                     | -0.3V to 40V                  |
| DIM to GND                            | -0.3V to 6V                   |
| IADJ, VREF to GND                     | -0.3V to 5V                   |
| ESD Susceptibility <sup>(2)</sup>     | ±2 kV (All pins Except Pin 6) |
| Power Dissipation                     | Internally Limited            |
| Junction Temperature                  | 150°C                         |
| Storage Temperature Range             | 0°C to 150°C                  |
| Peak Reflow Case Temperature (30 sec) | 245°C                         |

- (1) Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions under which operation of the device is intended to be functional. For specifications and test conditions, see the Electrical Characteristics.
- (2) The human body model is a 100 pF capacitor discharged through a 1.5 kΩ resistor into each pin. The Pin 6 ( IADJ pin) pass ± 1kV. Test method is per JESD22-A114S.

### RECOMMENDED OPERATING CONDITIONS <sup>(1)</sup>

|  | VALUE / UNITS  |
|--|----------------|
| LED+, LED-                             | 4.5V to 36V    |
| DIM                                    | 0V to 5.5V     |
| IADJ                                   | 0V to 0.2V     |
| Junction Temperature (T <sub>J</sub> ) | -40°C to 125°C |

- (1) Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions under which operation of the device is intended to be functional. For specifications and test conditions, see the Electrical Characteristics.

## ELECTRICAL CHARACTERISTICS

Limits in standard type are for  $T_J = 25^\circ\text{C}$  unless otherwise stated; limits in **boldface** type apply over the operating junction temperature range  $T_J$  of  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ . Minimum and maximum limits are specified through test, design, or statistical correlation. Typical values represent the most likely parametric norm at  $T_J = 25^\circ\text{C}$ , and are provided for reference purposes only. Unless otherwise stated the following conditions apply:  $V_{IN} = 24\text{ V}$ ,  $I_{LED} = 350\text{ mA}$ .  $V_{IN}$  is the voltage applied across LED+ and GND.  $I_{IN}$  is the input current flowing into the LED+ node.  $I_{LED}$  is a LED current flowing into the LED- pin.  $V_{LED}$  is the voltage applied across LED+ and LED-.  $V_{DIM}$  is the voltage applied across the DIM pin to ground. Resistor  $R_{IADJ}$  connect from IADJ pin to ground. Resistor  $R_{VREF}$  connect from VREF pin to ground.

| Symbol                         | Parameter   | Conditions  | Min <sup>(1)</sup> | Typ <sup>(2)</sup> | Max <sup>(1)</sup> | Units              |
|--------------------------------|---|---|--------------------|--------------------|--------------------|--------------------|
| <b>SYSTEM PARAMETERS</b>       |   |   |                    |                    |                    |                    |
| $I_{IN}$                       | Input Current                                       | $V_{LED} = 0\text{ V}$ , $4.5\text{ V} \leq V_{IN} \leq 36\text{ V}$ , $V_{DIM} = 0\text{ V}$   | 2.0                | 2.35               | 2.7                | mA                 |
| $I_{LED}$                      | LED Current   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$ , $T_J = 25^\circ\text{C}$  | 336                | 350                | 361                | mA                 |
|                                |   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$ , $T_J = 25^\circ\text{C}$ to $125^\circ\text{C}$                           | 328                | 350                | 361                |                    |
|                                |   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$ , $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$                          | <b>328</b>         | 350                | <b>370</b>         |                    |
| $I_{LED-36V}$                  | LED Current at $V_{IN} = 36\text{ V}$               | $V_{IN} = 36\text{ V}$ , $V_{LED} = 24\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$ , $T_J = 25^\circ\text{C}$                         | 332                | 350                | 359                | mA                 |
|                                |   | $V_{IN} = 36\text{ V}$ , $V_{LED} = 24\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$ , $T_J = 25^\circ\text{C}$ to $125^\circ\text{C}$  | 330                | 350                | 359                |                    |
|                                |   | $V_{IN} = 36\text{ V}$ , $V_{LED} = 24\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$ , $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$ | <b>330</b>         | 350                | <b>366</b>         |                    |
| $I_{LED-ADJ1}$                 | Adjusted LED Current                                | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = 10.5\text{ k}\Omega$ , $T_J = 25^\circ\text{C}$  | 432                | 450                | 466                | mA                 |
|                                |   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = 10.5\text{ k}\Omega$ , $T_J = 25^\circ\text{C}$ to $125^\circ\text{C}$                   | 429                | 450                | 466                |                    |
|                                |   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = 10.5\text{ k}\Omega$ , $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$                  | <b>429</b>         | 450                | <b>474</b>         |                    |
| $I_{LED-ADJ2}$                 | Adjusted LED Current                                | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 500\Omega$ , $R_{VREF} = \text{open}$ , $T_J = 25^\circ\text{C}$  | 287                | 300                | 309                | mA                 |
|                                |   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 500\Omega$ , $R_{VREF} = \text{open}$ , $T_J = 25^\circ\text{C}$ to $125^\circ\text{C}$                         | 283                | 300                | 309                |                    |
|                                |   | $V_{LED} = 18\text{ V}$ , $R_{IADJ} = 500\Omega$ , $R_{VREF} = \text{open}$ , $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$                        | <b>283</b>         | 300                | <b>315</b>         |                    |
| $I_{LED-SHORT}$                | LED Short Circuit Current at $V_{IN} = 36\text{ V}$ | $V_{LED} = 0\text{ V}$ , $V_{IN} = 36\text{ V}$ , DIM = open  | <b>800</b>         | 900                | <b>1020</b>        | mA                 |
| $I_{LED-LEAK}$                 | "LED-" pin leakage current                          | $V_{LED} = 0\text{ V}$ , $V_{IN} = \text{operating max}$ , DIM = 0V   |                    |                    | 1.2                | $\mu\text{A}$      |
| $f_{SW}$                       | Switching Frequency                                 | $V_{LED} = 12\text{ V}$ , $R_{IADJ} = 0\Omega$ , $R_{VREF} = \text{open}$   | <b>365</b>         | 400                | <b>450</b>         | kHz                |
| $V_{DIM}$                      | DIM Pin Threshold                                   | $V_{DIM}$ Increasing  |                    | 1.0                | <b>1.2</b>         | V                  |
| $V_{DIM-HYS}$                  | DIM Pin Hysteresis                                  |   |                    | 0.25               |                    | V                  |
| <b>THERMAL CHARACTERISTICS</b> |   |   |                    |                    |                    |                    |
| $T_{SD}$                       | Thermal Shutdown Temperature                        | $T_J$ Rising  |                    | 170                |                    | $^\circ\text{C}$   |
| $T_{SD-HYS}$                   | Thermal Shutdown Temp. Hysteresis                   | $T_J$ Rising  |                    | 10                 |                    | $^\circ\text{C}$   |
| $\theta_{JA}$                  | Junction to Ambient <sup>(3)</sup>                  | 4 Layer JEDEC Printed Circuit Board, 100 vias, No air flow  |                    | 19.3               |                    | $^\circ\text{C/W}$ |
|                                |   | 2 Layer JEDEC PCB, No air flow  |                    | 21.5               |                    |                    |
| $\theta_{JC}$                  | Junction to Case                                    | No air flow   |                    | 1.9                |                    | $^\circ\text{C/W}$ |

- (1) Min and Max limits are 100% production tested at an ambient temperature ( $T_A$ ) of  $25^\circ\text{C}$ . Limits over the operating temperature range are specified through correlation using Statistical Quality Control (SQC) methods. Limits are used to calculate Average Outgoing Quality Level (AOQL).
- (2) Typical numbers are at  $25^\circ\text{C}$  and represent the most likely parametric norm.
- (3)  $\theta_{JA}$  measured on a 1.705" x 3.0" four layer board, with one ounce copper, thirty five 12 mil thermal vias, no air flow, and 1W power dissipation.

**TYPICAL PERFORMANCE CHARACTERISTICS**

Unless otherwise specified, the following conditions apply:  $V_{IN} = 24V$ ,  $C_{IN}$  is a 2.2 $\mu F$  100V X7R ceramic capacitor for driving 2–7 power LEDs with  $I_{LED} = 350mA$ . Single LED forward voltage used is 3.2V.  $T_A = 25^\circ C$  for efficiency curves and waveforms.

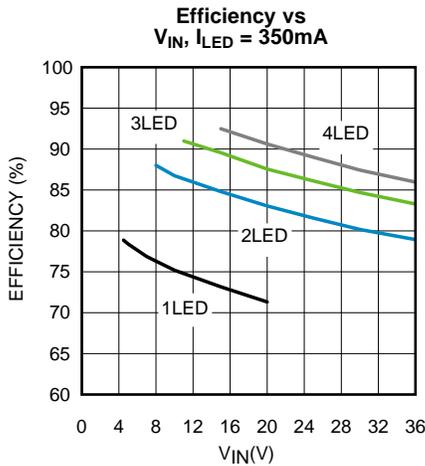


Figure 7.

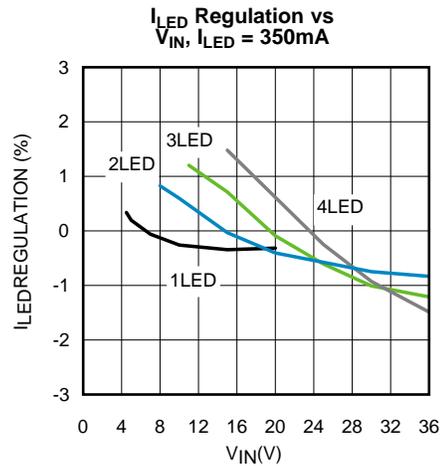


Figure 8.

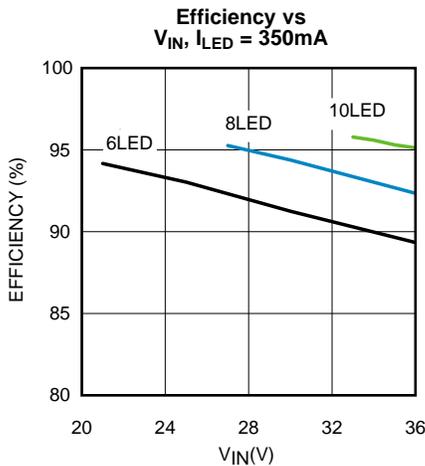


Figure 9.

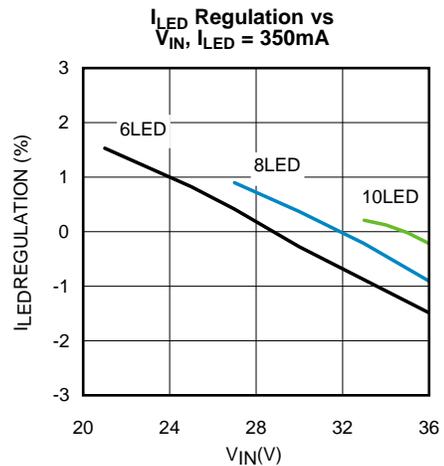


Figure 10.

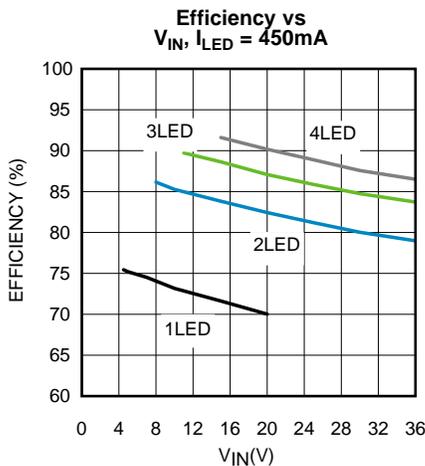


Figure 11.

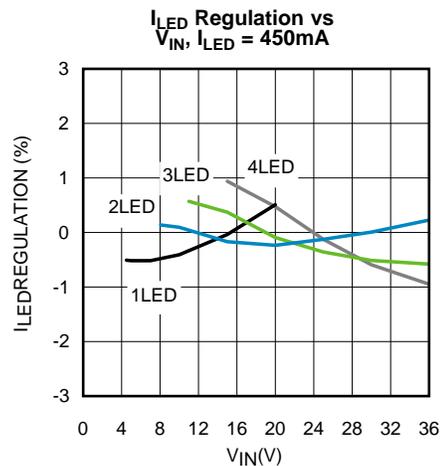


Figure 12.

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

Unless otherwise specified, the following conditions apply:  $V_{IN} = 24V$ ,  $C_{IN}$  is a 2.2 $\mu F$  100V X7R ceramic capacitor for driving 2–7 power LEDs with  $I_{LED} = 350mA$ . Single LED forward voltage used is 3.2V.  $T_A = 25^\circ C$  for efficiency curves and waveforms.

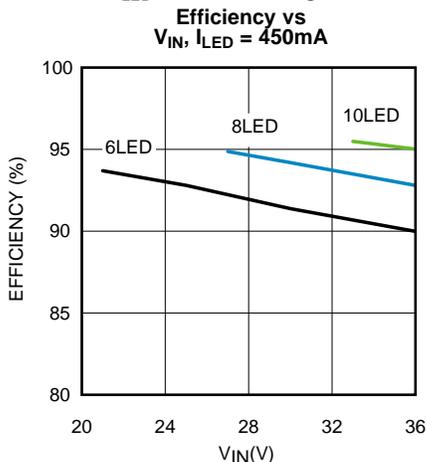


Figure 13.

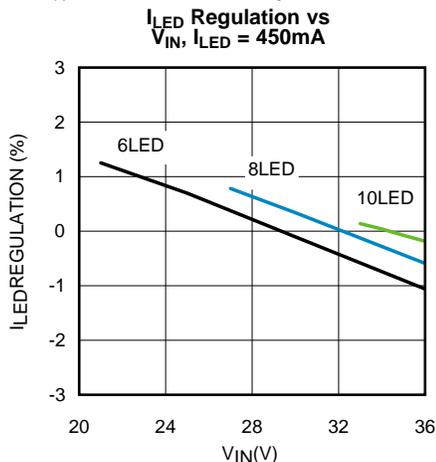


Figure 14.

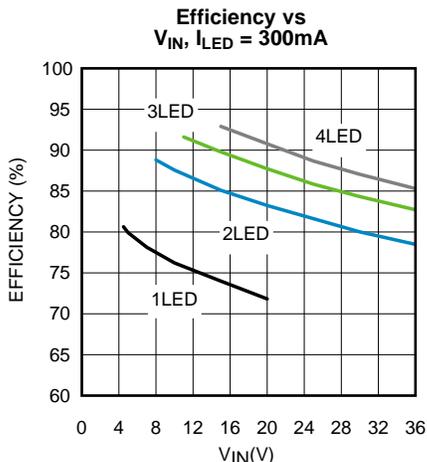


Figure 15.

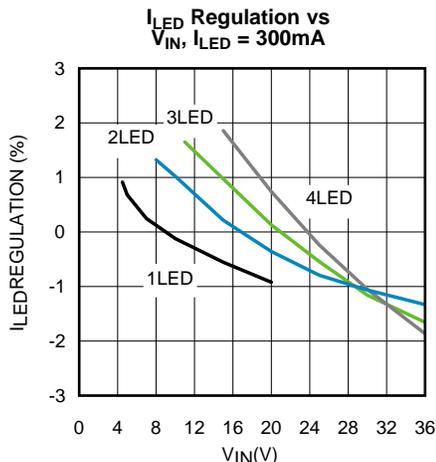


Figure 16.

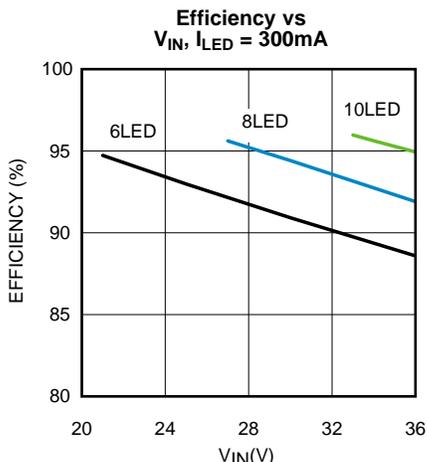


Figure 17.

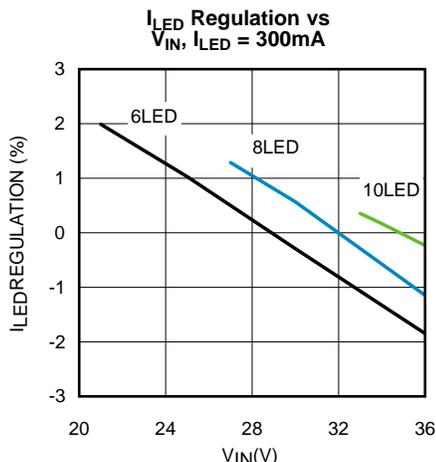


Figure 18.

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

Unless otherwise specified, the following conditions apply:  $V_{IN} = 24V$ ,  $C_{IN}$  is a 2.2 $\mu F$  100V X7R ceramic capacitor for driving 2–7 power LEDs with  $I_{LED} = 350mA$ . Single LED forward voltage used is 3.2V.  $T_A = 25^\circ C$  for efficiency curves and waveforms.

**LED Current with PWM Dimming  
 $V_{DIM}$ Rising**

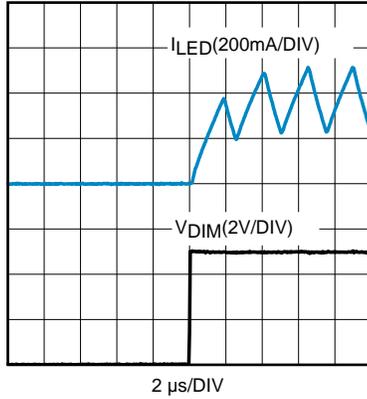


Figure 19.

**LED Current with PWM Dimming  
 $V_{DIM}$ Falling**

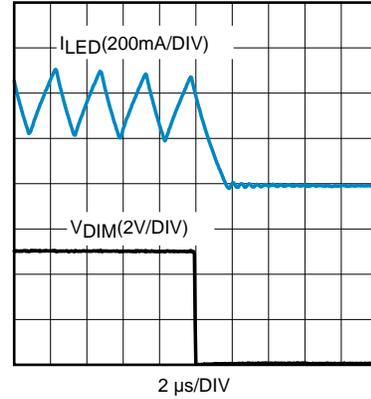


Figure 20.

**LED Current with PWM Dimming  
16 $\mu s$  dimming pulse**

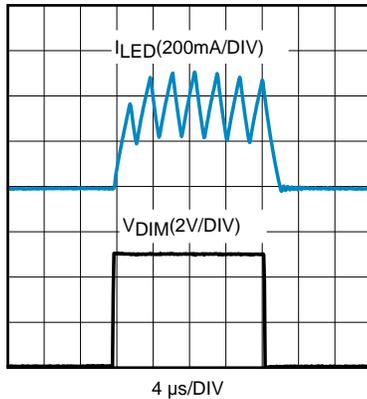


Figure 21.

**$I_{IN}$  vs  $V_{IN}$   
 $V_{DIM} = 0V$**

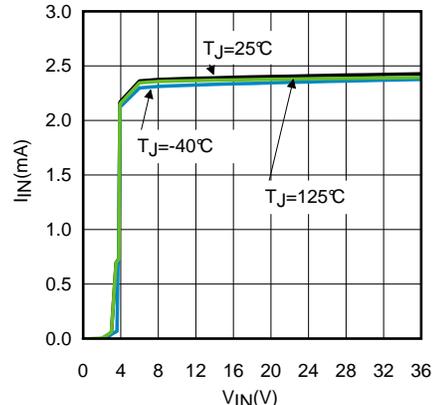


Figure 22.

**$I_{IN}$  vs  $V_{IN}$   
LED = open, DIM = open**

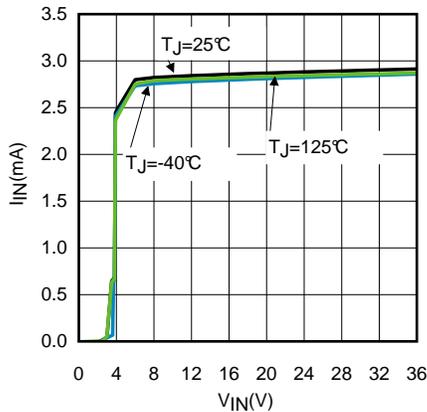


Figure 23.

**$I_{LED}$  vs  $V_{IN}$   
3LED**

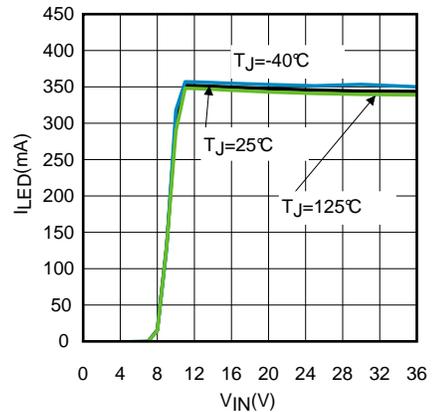


Figure 24.

### TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Unless otherwise specified, the following conditions apply:  $V_{IN} = 24V$ ,  $C_{IN}$  is a 2.2 $\mu F$  100V X7R ceramic capacitor for driving 2–7 power LEDs with  $I_{LED} = 350mA$ . Single LED forward voltage used is 3.2V.  $T_A = 25^\circ C$  for efficiency curves and waveforms.

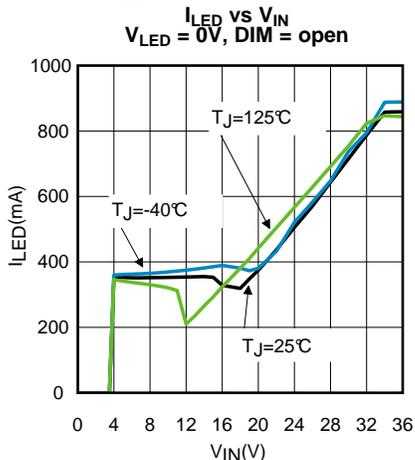


Figure 25.

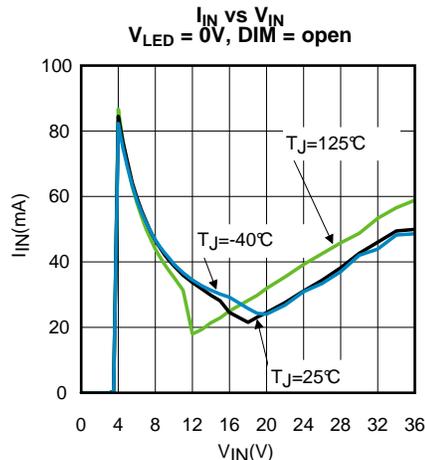


Figure 26.

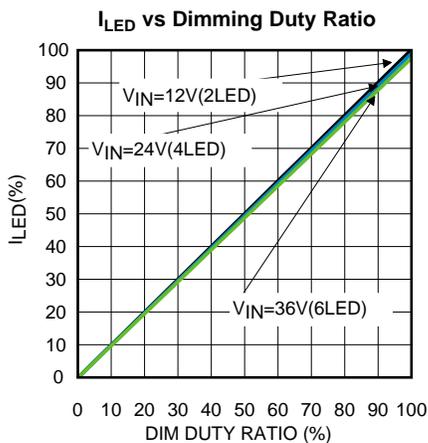


Figure 27.

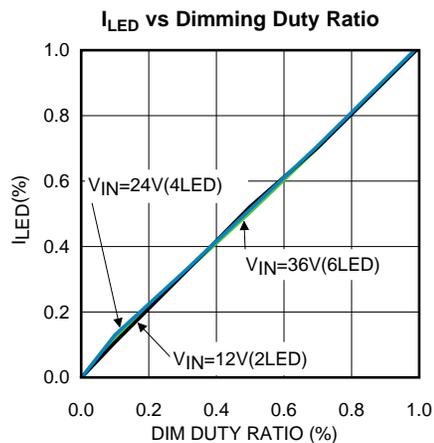


Figure 28.

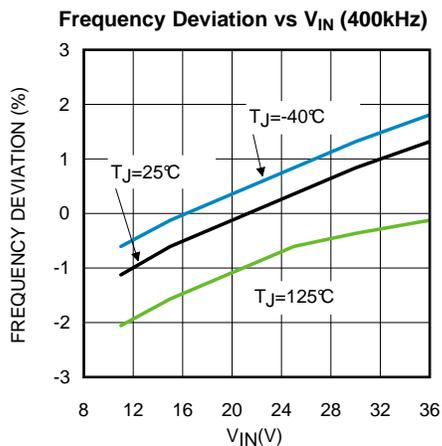


Figure 29.


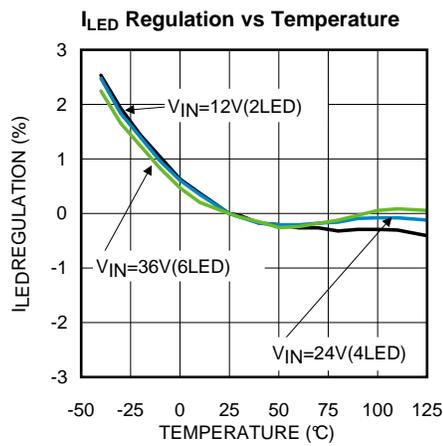



Figure 30.

**TYPICAL PERFORMANCE CHARACTERISTICS (continued)**

Unless otherwise specified, the following conditions apply:  $V_{IN} = 24V$ ,  $C_{IN}$  is a 2.2 $\mu F$  100V X7R ceramic capacitor for driving 2–7 power LEDs with  $I_{LED} = 350mA$ . Single LED forward voltage used is 3.2V.  $T_A = 25^\circ C$  for efficiency curves and waveforms.

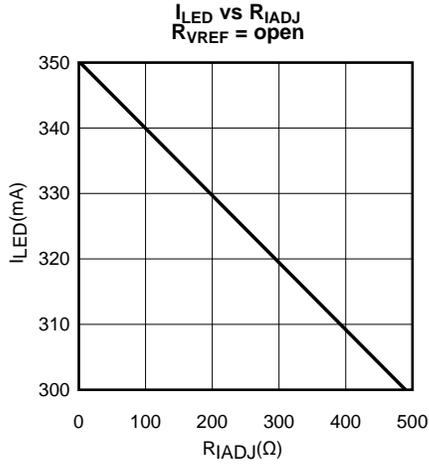


**Figure 31.**

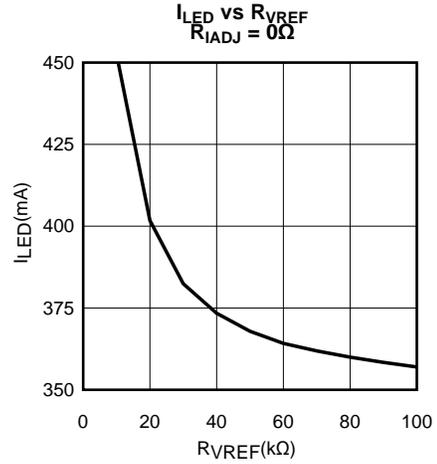

**Figure 32.**

**BLOCK DIAGRAM**

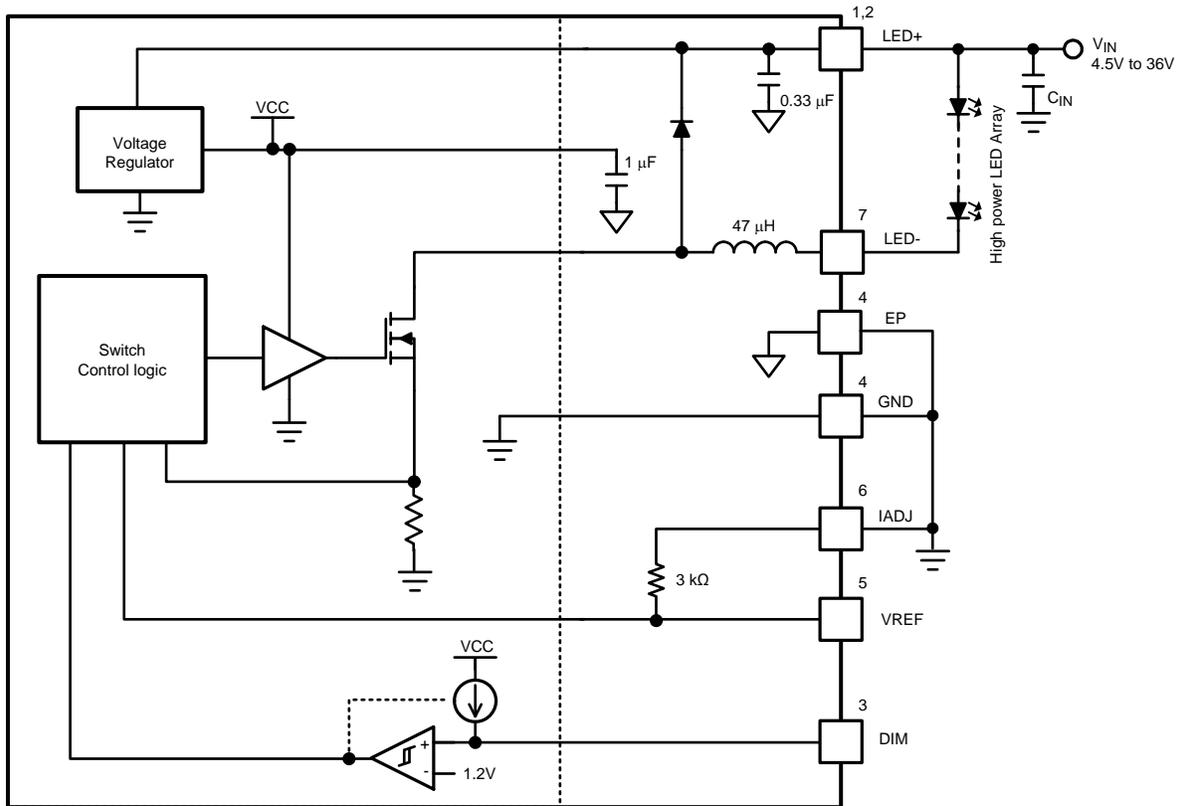

**Operation Description**

The TPS92550 is a high power floating buck LED driver with wide input voltage range. It requires no external current sensing elements and loop compensation network. The integrated power switch enables high output power up to 14W with 450mA LED current.

High speed dimming control input allows precision and high resolution brightness control for applications which require fine brightness adjustment.

## APPLICATION INFORMATION

### SETTING THE LED CURRENT

The TPS92550 requires no external current sensing resistor for LED current regulation. The average LED current of the TPS92550 is adjustable from 300mA to 450mA by varying the resistance of the resistor according to the following equation and table.

For  $R_{VREF} = \text{open}$  and  $R_{IADJ} \leq 499\Omega$

$$I_{LED} = \frac{1050}{3k + R_{IADJ}} \tag{1}$$

For  $R_{IADJ} = 0$  and  $R_{VREF} \geq 10.5k\Omega$

$$I_{LED} = \frac{1050}{3k / R_{VREF}} \tag{2}$$

Table 1. Example for  $I_{LED}$  Setting

| $R_{IADJ}(\Omega)$ | $R_{VREF}(\Omega)$ | $I_{LED}(mA)$ |
|--------------------|--------------------|---------------|
| 499                | OPEN               | 300           |
| SHORT              | OPEN               | 350           |
| SHORT              | 10.5k              | 450           |

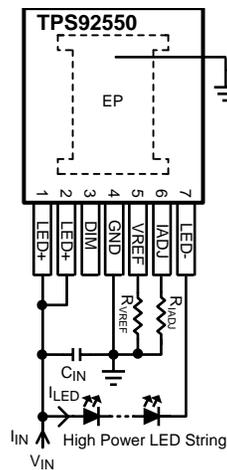


Figure 33. TPS92550 Application Schematic for  $I_{LED}$  Setting

### Minimum Switch On-Time

The on-time of the internal switch should be no shorter than 400ns. The number of LED (typical forward voltage at 3.2V) to input voltage is constrained by that as shown in the following table.

| No. of LED | Max. $V_{IN}(V)$ |
|------------|------------------|
| 1          | 20               |
| 2 – 10     | 36               |

### Peak Switch Current Limit

The TPS92550 features an integrated switch current limiting mechanism to prevent the LEDs from being over-driven. The switch current limiter is triggered when the switch current is three times exceeding the current level set by resistor. Once the current limiter is triggered, the internal power switch turn OFF for 3.6 $\mu$ s to discharge the inductor until inductor current reduces back to normal level. The current limiting feature is exceptionally important to avoid permanent damage of the TPS92550 application circuit due to short circuit of LED string.

## PWM Dimming Control

The DIM pin of the TPS92550 is an input with internal pull-up that accepts logic signals for average LED current control. Applying a logic high (above 1.2V) signal to the DIM pin or leaving the DIM pin open will enable the device. Applying a logic low signal (below 0.7V) to the DIM pin will disable the switching activity of the device but maintain operation of the VCC regulator active. The TPS92550 operation of high speed dimming and very fine dimming control as shown in Figure 34.

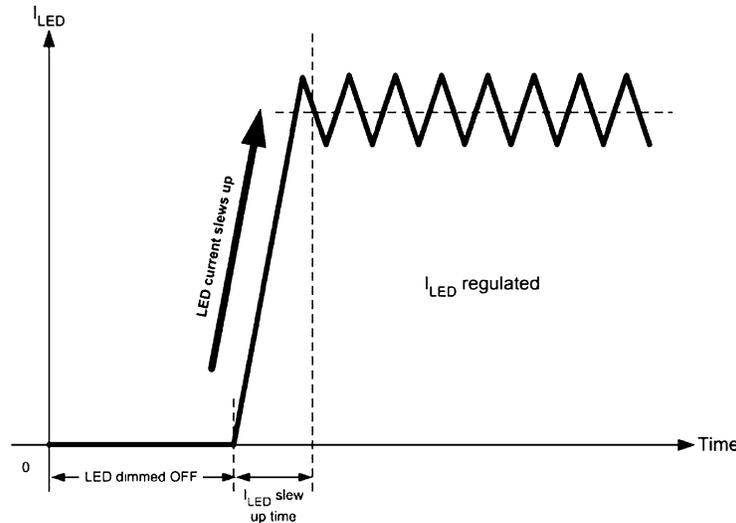


Figure 34. Shortened Current Slew up Time of the TPS92550

To ensure normal operation of the TPS92550, it is recommended to set the dimming frequency not higher than 1/10 of the switching frequency. The dim pulse on time is tested down to 16 $\mu$ s. In applications that require high dimming contrast ratio, low dimming frequency should be used.

## Parallel Operation

When a load current higher than 450mA is required by the application, TPS92550 can be used in parallel to deliver higher current. With common VINs and GNDs, the TPS92550 will operate as independent asynchronous current sinks driving the same LED load. The total DC current of the modules will be additive; however, low frequency sub-harmonic current ripple may be present and its frequency and magnitude will depend upon the phase relationship between the internal clocks as there is no provision for synchronizing driver clocks. It is suggested to have minimum 2.2 $\mu$ F C<sub>OUT</sub> located close to the module to filter out the current ripple, and the resultant LED current will become DC. Current sharing modules should have a local C<sub>IN</sub> capacitor of minimum 2.2 $\mu$ F located as close to V<sub>IN</sub> and GND as possible. Refer to Figure 35 for the TPS92550 parallel operation circuit schematic. Refer to Figure 36 for the TPS92550 parallel operation results I<sub>LED</sub> vs V<sub>IN</sub>.

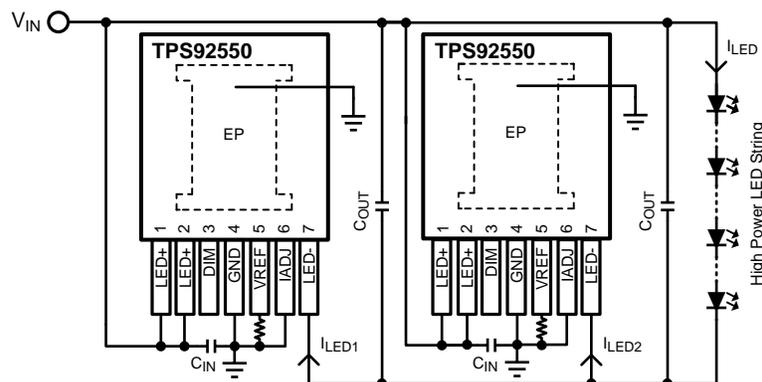


Figure 35. Parallel Operation Circuit Schematic for I<sub>LED</sub> = 900mA

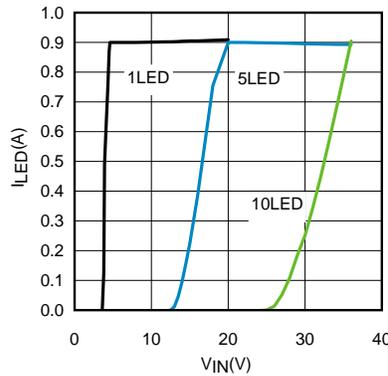


Figure 36. Parallel Operation Results for I<sub>LED</sub> = 900mA, I<sub>LED</sub> vs V<sub>IN</sub>

### PC Board Layout Considerations

The overall performance of the LED driver is highly depends on the PCB layout. Poor board layout can disrupt the performance of the TPS92550 and surrounding circuitry by contributing to EMI, ground bounce and resistive voltage drop in the traces. These can send erroneous signals to the LED driver resulting in poor regulation and stability. Good layout can be implemented by following a few simple design rules.

1. Place C<sub>IN</sub> as close as possible to the V<sub>IN</sub> pin and GND exposed pad (EP).
2. Place C<sub>OUT</sub> (optional for reduction of LED current ripple and EMI compliance) as close as possible to the VLED+ pin and VLED- pin.
3. The exposed pad (EP) must connect to the GND pin directly.

### EMI Design Considerations

From an EMI reduction standpoint, it is imperative to minimize the di/dt current paths (refer to Figure 37). Therefore, it is essential to connect a 2.2μF capacitor (C<sub>OUT</sub>) across the LED+ pin and LED- pin. This will minimize the ripple current so that it can reduce radiated EMI (refer to Figure 38 and Figure 39).



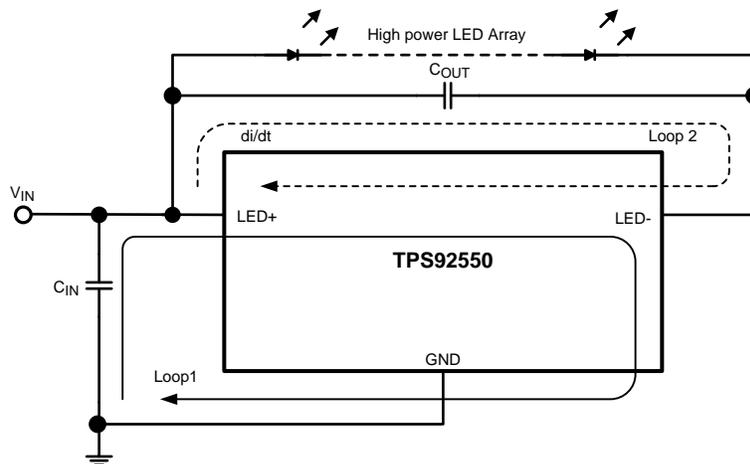


Figure 37. Current Loops

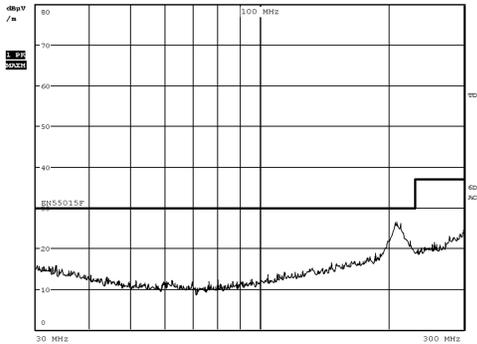


**Figure 38. Complies with EN55015 Radiated Emissions (HORI. / HEIGHT=3.0m / RANGE=10m)**  
 $C_{IN} = 2.2\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{IN} = 36V$ ,  $I_{LED} = 350mA$ ,  
 No. of LED = 10

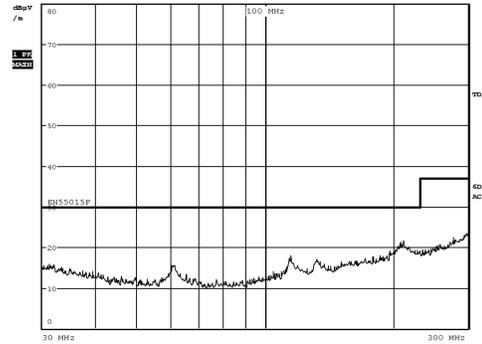


**Figure 39. Complies with EN55015 Radiated Emissions (VERT. / HEIGHT=1.0m / RANGE=10m)**  
 $C_{IN} = 2.2\mu F$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{IN} = 36V$ ,  $I_{LED} = 350mA$ ,  
 No. of LED = 10

**TPS92550 Application Circuit Schematic and BOM**

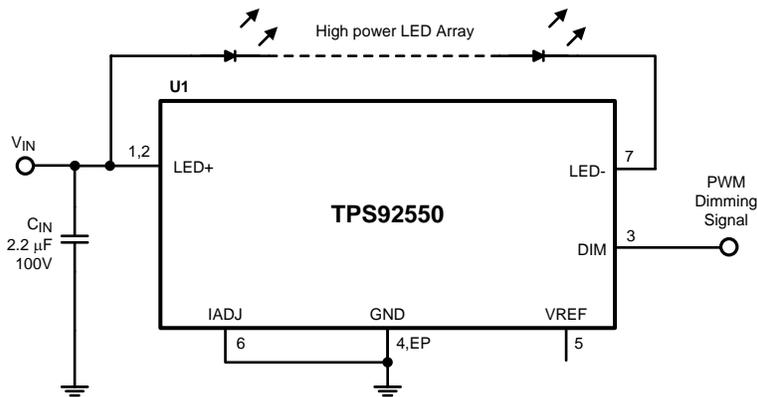

**Table 2. Bill of Materials,  $V_{IN} = 18V$ ,  $I_{LED} = 350mA$ , No. of LED = 2 — 5**

| Designator | Description             | Case Size | Manufacturer      | Manufacturer P/N   | Quantity |
|------------|-------------------------|-----------|-------------------|--------------------|----------|
| U1         | LED Micro-Module Driver | PFM       | Texas Instruments | TPS92550TZ         | 1        |
| $C_{IN}$   | 2.2 $\mu F$ , 100V, X7R | 1210      | Murata            | GRM32ER72A225KA35L | 1        |

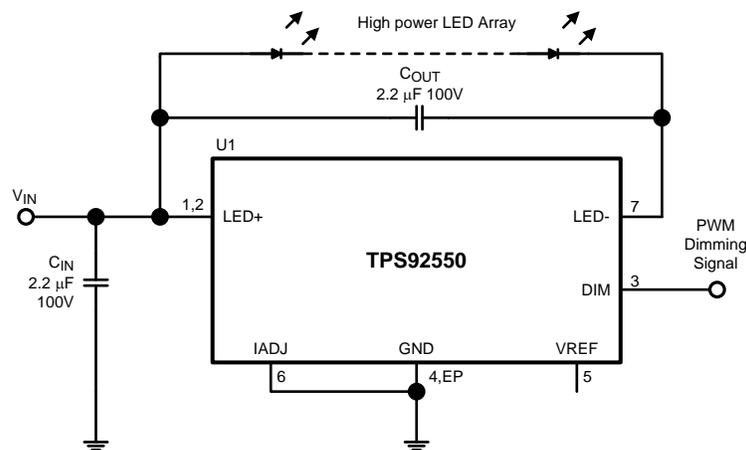

**Table 3. Bill of Materials,  $V_{IN} = 36V$ ,  $I_{LED} = 350mA$ , No. of LED = 10, Complies with EN55015 Radiated**


**Table 3. Bill of Materials,  $V_{IN} = 36V$  ,  $I_{LED} = 350mA$  , No.of LED = 10, Complies with EN55015 Radiated Emissions (continued)**

**Emissions**

| Designator       | Description             | Case Size | Manufacturer      | Manufacturer P/N   | Quantity |
|------------------|-------------------------|-----------|-------------------|--------------------|----------|
| U1               | LED Micro-Module Driver | PFM       | Texas Instruments | TPS92550TZ         | 1        |
| C <sub>IN</sub>  | 2.2 $\mu$ F, 100V, X7R  | 1210      | Murata            | GRM32ER72A225KA35L | 1        |
| C <sub>OUT</sub> | 2.2 $\mu$ F, 100V, X7R  | 1210      | Murata            | GRM32ER72A225KA35L | 1        |

**PCB Layout Diagrams**

The PCB design is available in the TPS92550 product folder at [www.ti.com](http://www.ti.com).

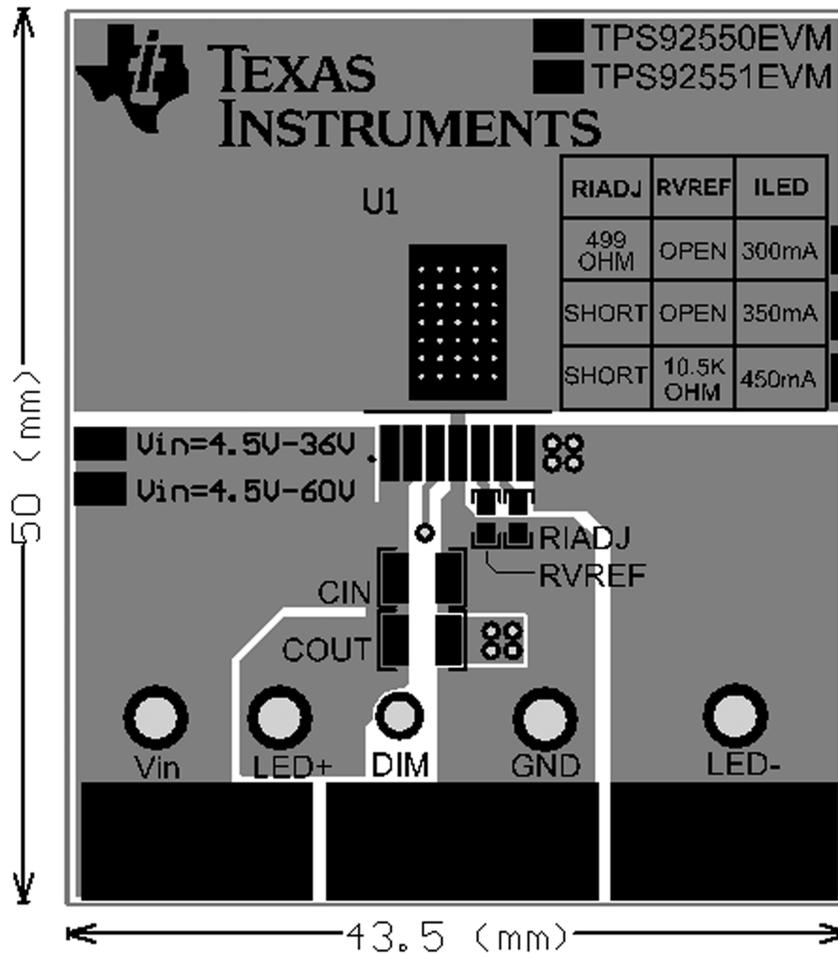

**Figure 40. Top Layer and Top Overlay**

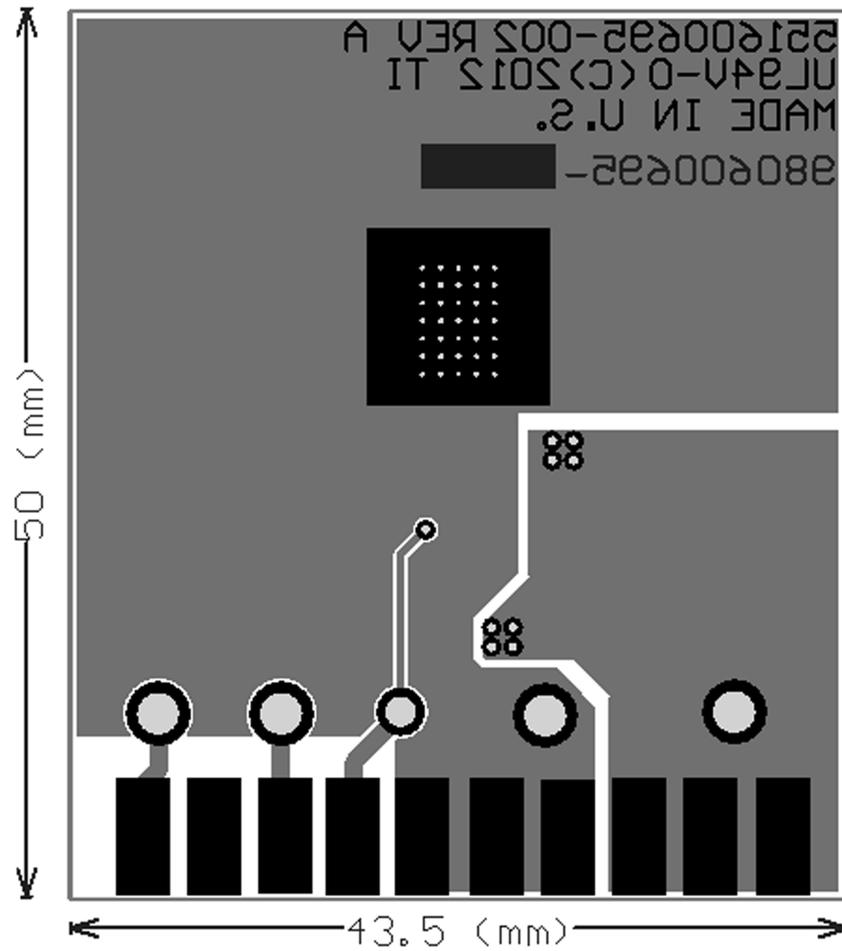


Figure 41. Bottom Layer and Bottom Overlay

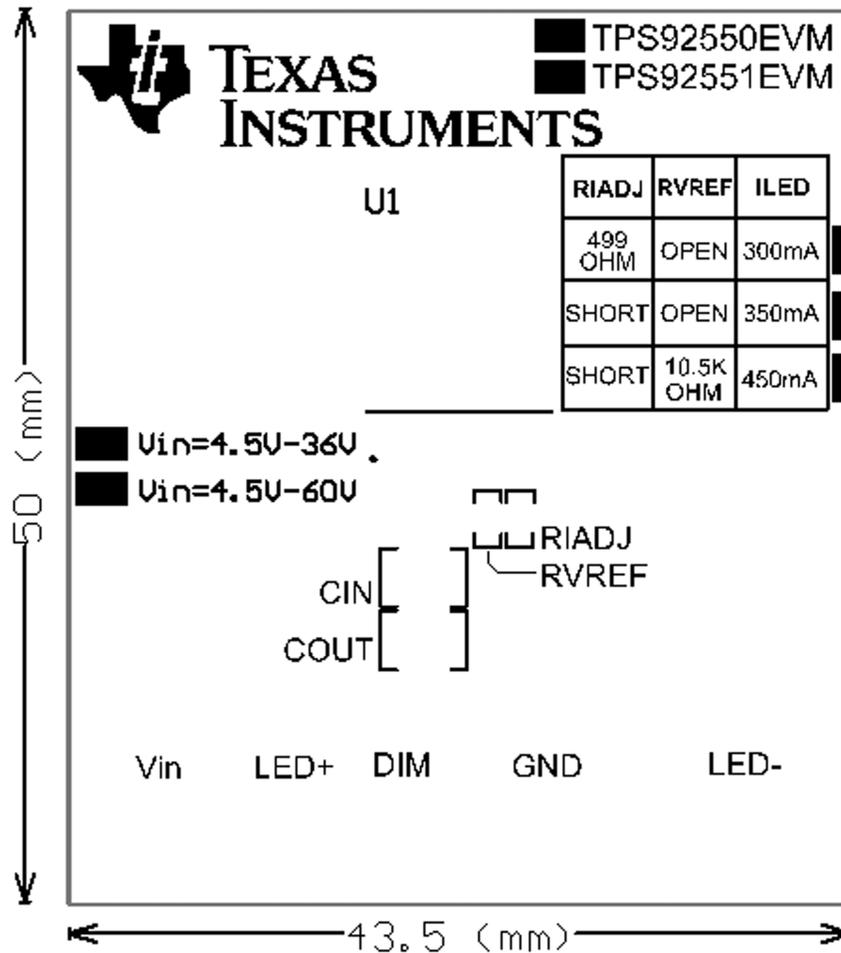


Figure 42. Top Overlay

---

**REVISION HISTORY**

| <b>Changes from Revision B (May 2013) to Revision C</b>    | <b>Page</b>        |
|--|--------------------|
| • Changed layout of National Data Sheet to TI format ..... | <a href="#">18</a> |

---

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2)                  | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|----------------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS92550TZ/NOPB  | ACTIVE        | TO-PMOD      | NDW             | 7    | 250         | RoHS (In Work) & Green (In Work) | CU SN                   | Level-3-245C-168 HR  | -40 to 125   | TPS92550<br>TZ          | <a href="#">Samples</a> |
| TPS92550TZ/NOPB  | ACTIVE        | TO-PMOD      | NDW             | 7    | 500         | RoHS (In Work) & Green (In Work) | CU SN                   | Level-3-245C-168 HR  | -40 to 125   | TPS92550<br>TZ          | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|-----|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS92550TZ/NOPB | TO-PMOD      | NDW             | 7    | 250 | 330.0              | 24.4               | 10.6    | 14.22   | 5.0     | 16.0    | 24.0   | Q2            |
| TPS92550TZ/NOPB | TO-PMOD      | NDW             | 7    | 500 | 330.0              | 24.4               | 10.6    | 14.22   | 5.0     | 16.0    | 24.0   | Q2            |

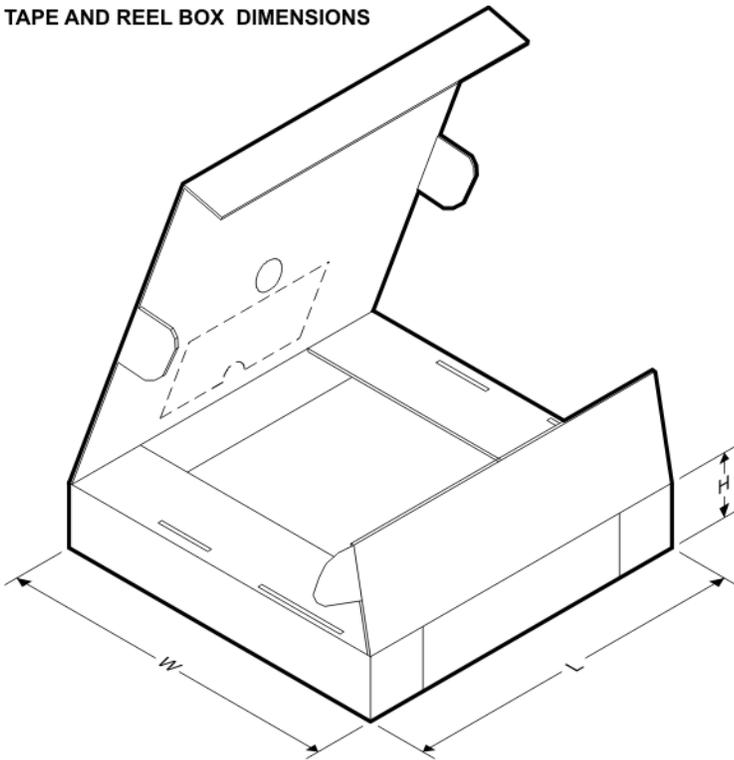**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|------------------|--------------|-----------------|------|-----|-------------|------------|-------------|
| TPS92550TZ/NOPB  | TO-PMOD      | NDW             | 7    | 250 | 367.0       | 367.0      | 45.0        |
| TPS92550TZX/NOPB | TO-PMOD      | NDW             | 7    | 500 | 367.0       | 367.0      | 45.0        |

NDW0007A

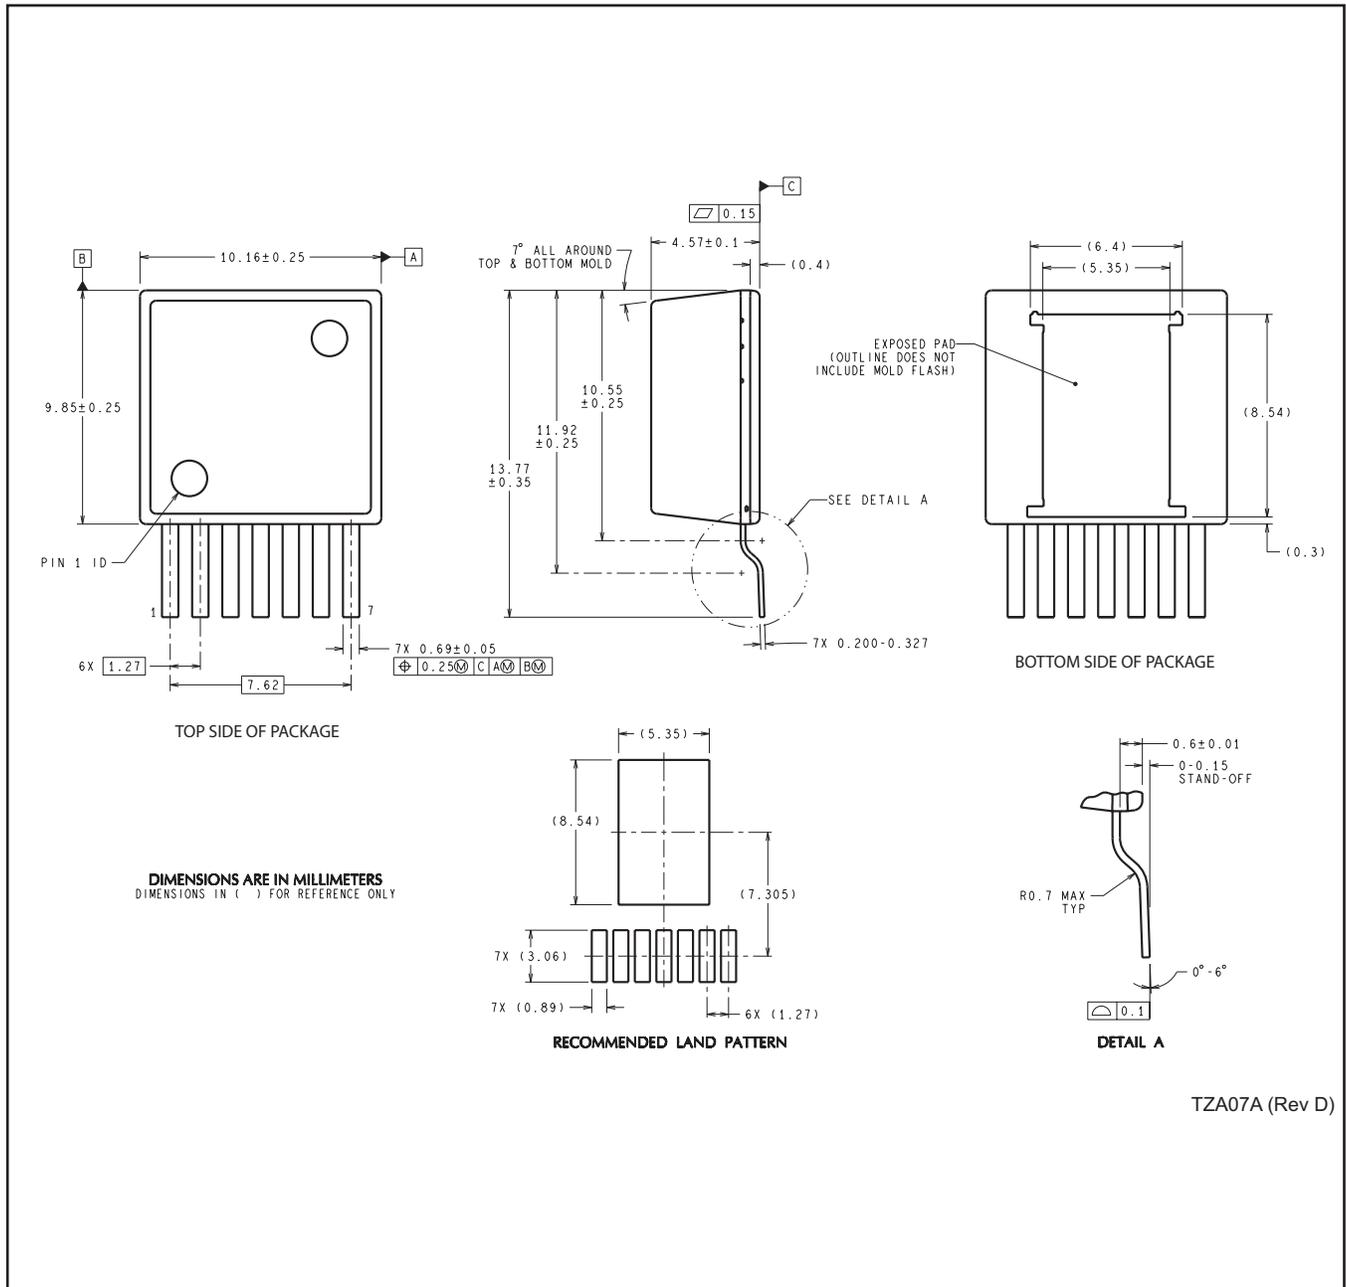

TZA07A (Rev D)

## IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.