

Features

- Interdigitated amplifying gates
- Fast turn-on and high di/dt
- Low switching losses

Typical Applications

- Inductive heating
- Electronic welders
- Self-commutated inverters

$I_{T(AV)}$ **1330A**
 V_{DRM}/V_{RRM} **800~1800V**
 t_q **18~50μs**
 I_{TSM} **14 kA**
 I^2t **980 10³A²S**



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled,	125			1330	A
						880	
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$, tp=10ms $V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 100V$	125	800		1800	V
I_{DRM} I_{RRM}	Repetitive peak current	$V_D = V_{DRM}$ $V_R = V_{RRM}$	125			80	mA
I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	125			14	kA
I^2t	I^2T for fusing coordination					980	$A^2s * 10^3$
V_{TO}	Threshold voltage		125			1.56	V
r_T	On-state slop resistance					0.33	mΩ
V_{TM}	Peak on-state voltage	$I_{TM}=2000A$, F=24kN	125			2.22	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			500	V/μs
di/dt	Critical rate of rise of on-state current	$V_{DM}= 67\% V_{DRM}$ to 1600A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125			1200	A/μs
Q_{rr}	Recovery charge	$I_{TM}=1500A$, tp=2000μs, $di/dt=-60A/\mu s$, $V_R=50V$	125		750		μC
t_q	Circuit commutated turn-off time	$I_{TM}=1000A$, tp=1000μs, $V_R=50V$ $dv/dt=30V/\mu s$, $di/dt=-20A/\mu s$	125	18		50	μs
I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	40		300	mA
V_{GT}	Gate trigger voltage			0.9		3.0	V
I_H	Holding current			20		500	mA
V_{GD}	Non-trigger gate voltage	$V_{DM}=67\% V_{DRM}$	125	0.3			V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 24kN				0.020	°C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink					0.005	
F_m	Mounting force			19		26	kN
T_{stg}	Stored temperature			-40		130	°C
W_t	Weight				440		g
Outline		KT50cT					

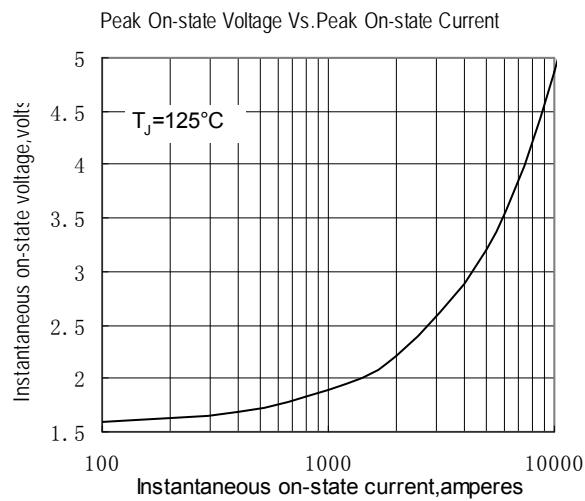


Fig.1

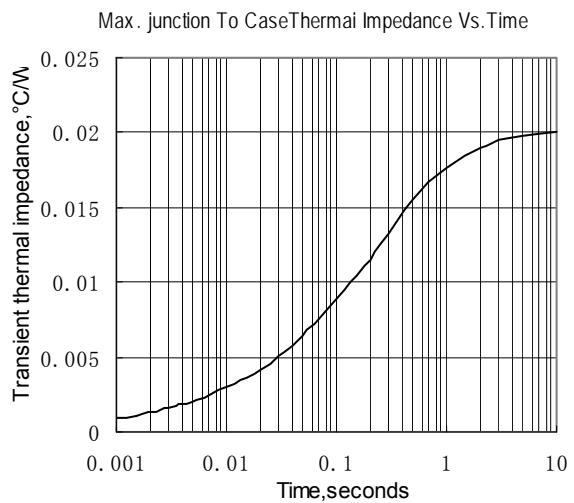


Fig.2

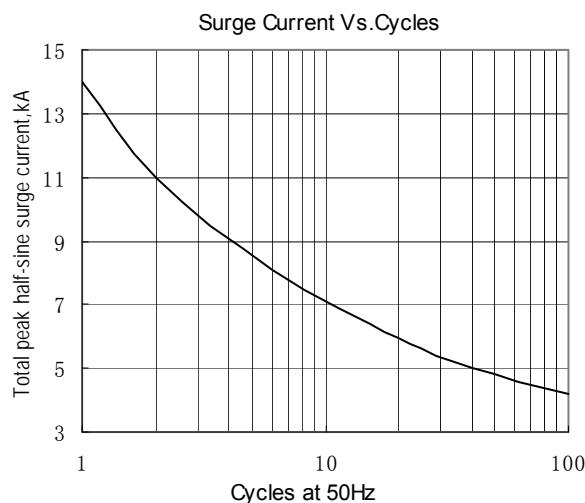


Fig.3

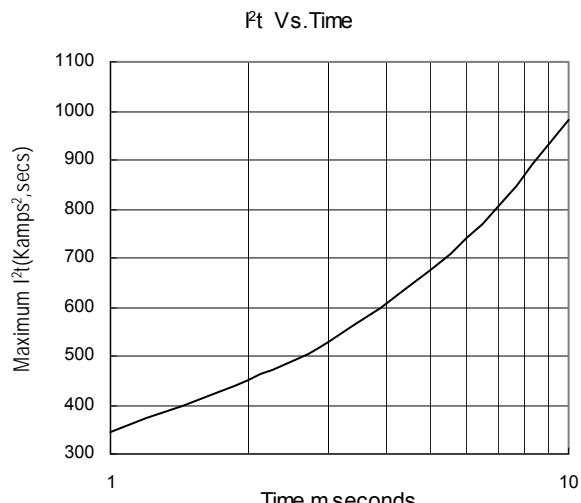


Fig.4

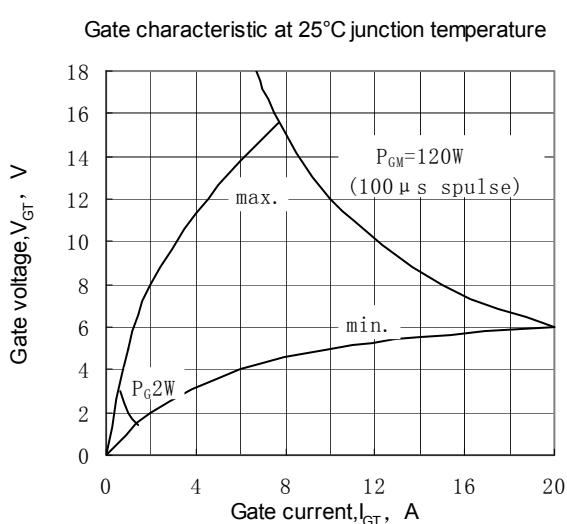


Fig.5

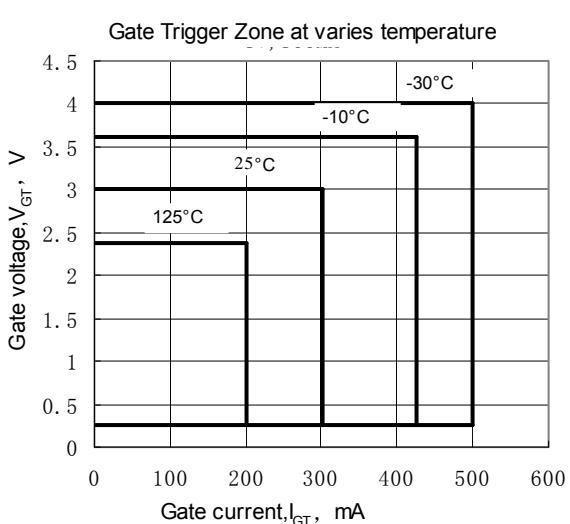


Fig.6

Outline: