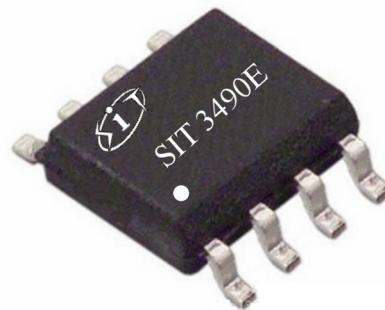


**FEATURES**

- 3.0V~5.5V Supply, Full-Duplex
 - 1/8 Unit Load, Allow Up to 256 Transceivers on the Bus
 - Driver Short-Circuit Output Protection
 - Strong Anti-Noise Ability
 - Integrated Transient Voltage Suppression Function
 - The Data Transmission Rate Up to 14Mbps in Electric Noise Environment
 - ESD Protection for RS-485 I/O Pins $\pm 15\text{kV}$, Human Body Model
- Provide green and environmentally friendly lead-free package

OUTLINE**DESCRIPTION**

SIT3490E is a 3.0V~5.5V powered, full-duplex, low power dissipation RS-485 transceiver fully meeting the requirements of RS-485/RS-422 standard.

SIT3490E contains one driver and one receiver, both can transmit signals independently. The SIT3490E has a 1/8-unit-load. It allows up to 256 transceivers on the bus and error-free data transmission up to 14Mbps.

SIT3490E has a working voltage range of 3.0V~5.5V, with the functions of Current-Limiting Protection, Over-voltage Protection, Control Port Hot Plug Input, etc.

SIT3490E has excellent ESD release capability, and HBM reaches $\pm 15\text{kV}$.

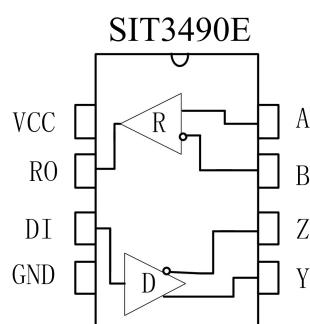
PIN CONFIGURATION

Figure.1 SIT3490E Pin Configuration

**LIMITING VALUES**

PARAMETER	SYMBOL	VALUE	UNIT
Supply voltage	VCC	+7	V
Driver Input Voltage	DI	-0.3~VCC+0.3	V
Receiver Input Voltage	A, B	-8~13	V
Receiver Output Voltage	RO	-0.3~VCC+0.3	V
Operating Temperature Ranges		-40~125	°C
Storage Temperature Range		-60~150	°C
Lead Temperature		300	°C
Continuous Power Dissipation	SOP8	400	mW
	DIP8	700	mW

The maximum limit parameters means that exceeding these values may cause irreversible damage to the device. Under these conditions, it is not conducive to the normal operation of the device. The continuous operation of the device at the maximum allowable rating may affect the reliability of the device. The reference point for all voltages is ground.

PINNING

PIN	SYMBOL	DESCRIPTION
1	VCC	Positive Supply: $3.0V \leq VCC \leq 5.5V$
2	RO	Receiver Output. If $A-B \geq +200mV$, RO will be high; If $A-B \leq -200mV$, RO will be low.
3	DI	Driver Input. A low on DI forces output Y low and output Z high. a high on DI forces output Y high and output Z low.
4	GND	Ground
5	Y	Non-inverting Driver Output
6	Z	Inverting Driver Output
7	B	Inverting Receiver Input
8	A	Non-inverting Receiver Input



DRIVER DC ELECTRICAL CHARACTERISTICS






PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Differential Driver Output (No load)	V _{OD1}			5		V
Differential Driver Output	V _{OD2}	figure 2, RL = 27 Ω	1.5		VCC	V
		figure 2, RL = 50 Ω	2		VCC	
Change in Magnitude of Driver Differential Output Voltage (NOTE1)	ΔV _{OD}	figure 2, RL = 27 Ω			0.2	V
Driver Common-Mode Output Voltage	V _{OC}	figure 2, RL = 27 Ω			3	V
Change in Magnitude of Common-Mode Output Voltage (NOTE1)	ΔV _{OC}	figure 2, RL = 27 Ω			0.2	V
Input High Voltage	V _{IH}	DI	2.0			V
Input Low Voltage	V _{IL}	DI			0.8	V
Logic Input Current	I _{IN1}	DI	-2		2	μA
Output short-circuit current, short-circuit to high	I _{OSD1}	short-circuit to 0V~12V	35		250	mA
Output short-circuit current, short-circuit to low	I _{OSD2}	short-circuit to 7V~0V	-250		-35	mA

(Unless otherwise noted, VCC=3.3V±10%, Temp=T_{MIN}~T_{MAX}, Typical values are at VCC=+3.3V, Temp=25°C)

NOTE1: ΔV_{OD} and ΔV_{OC} are the changes in V_{OD} and V_{OC}, respectively, when the DI input changes state.

RECEIVER DC ELECTRICAL CHARACTERISTICS

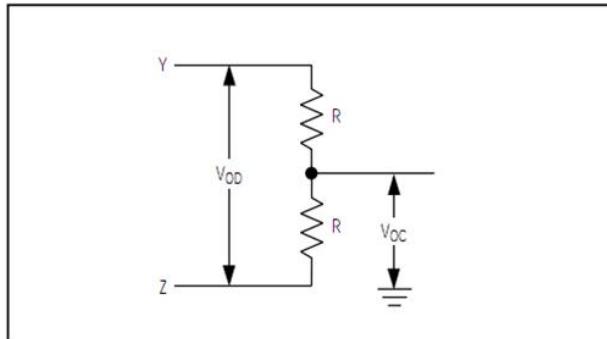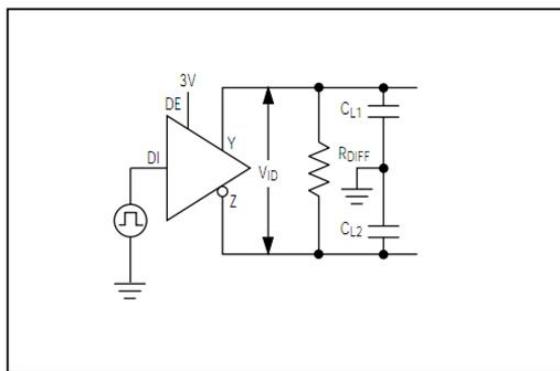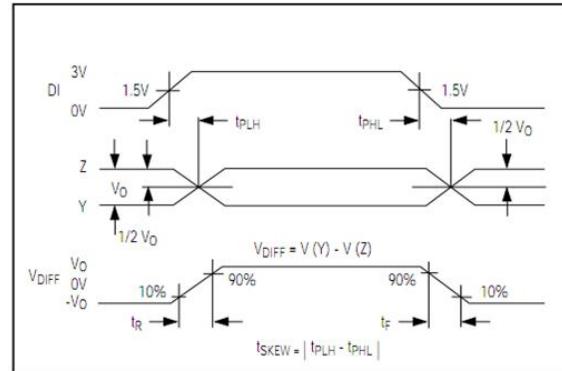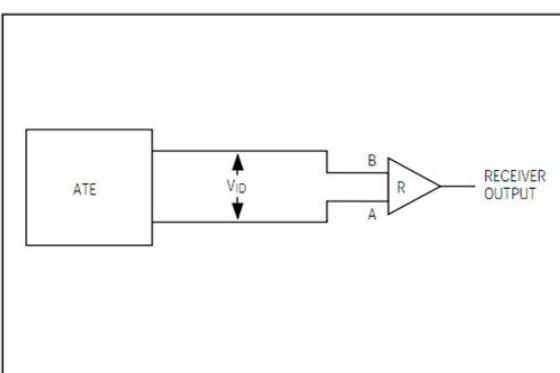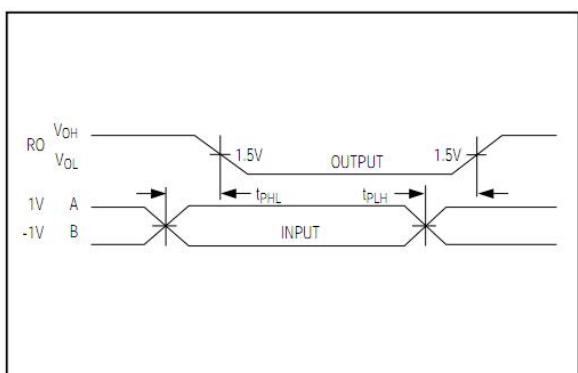PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Input current (A, B)	I _{IN2}	VCC=0 or 3.3V V _{IN} = 12 V			125	μA

TEST CIRCUIT

Figure 2 Driver DC test load

Figure 3 Driver timing test circuit

Figure 4 Drive propagation delay

Figure 5 Receiver propagation delay test circuit

Figure 6 Receiver propagation delay timing



ADDITIONAL DESCRIPTION

1 Sketch

SIT3490E is a full-duplex high-speed transceiver for RS-485 / RS-422 communication, which includes a driver and a receiver. It has failure safety, over-voltage protection and over-current protection. SIT3490E realizes error-free data transmission up to 14mbps.

2 Allowing up to 256 transceivers on the bus

The input impedance of the standard RS485 receiver is $12k\Omega$ (1 unit load), and the standard driver can drive up to 32 unit loads. The receiver of SIT3490E transceiver has $1/8$ unit load input impedance ($96k\Omega$), which allows up to 256 transceivers to be connected on the same communication bus in parallel. These devices can be combined arbitrarily or with other RS485 transceivers. Any combination of these devices and/or other RS-485 transceivers with a total of 32 unit loads or less can be connected to the line.




3 Driver output protection

By means of over-current and over-voltage protection mechanism, it can prevent excessive output current and power dissipation caused by faults or by bus contention, and fast short-circuit protection can be provided in the whole common mode voltage range (refer to typical working characteristics).

SOP8 DIMENSIONS

PACKAGE SIZE



SYMBOL	MIN/mm	TYP/mm	MAX/mm
A	1.50	1.60	1.70
A1	0.1	0.15	0.2
A2	1.35	1.45	1.55
b	0.355	0.400	0.455
D	4.800	4.900	5.00
E	3.780	3.880	3.980
E1	5.800	6.000	6.200
e		1.270BSC	
L	0.40	0.60	0.80
c	0.153	0.203	0.253
θ	-2°	-4°	-6°

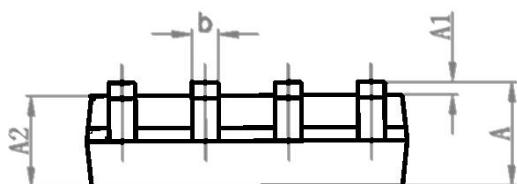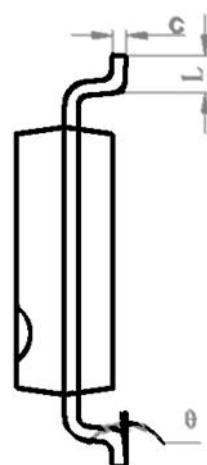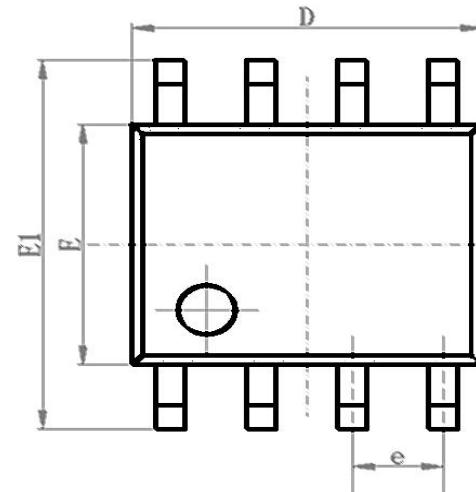

DIP8 DIMENSIONS

PACKAGE SIZE



SYMBOL	MIN/mm	TYP/mm	MAX/mm
A	9.00	9.20	9.40
A1	0.33	0.45	0.51
A2	2.54TYP		
A3	1.525TYP		
B	8.40	8.70	9.10
B1	6.20	6.40	6.60
B2	7.32	7.62	7.92
C	3.20	3.40	3.60
C1	0.50	0.60	0.80
C2	3.71	4.00	4.31
D	0.20	0.28	0.36
L	3.00	3.30	3.60

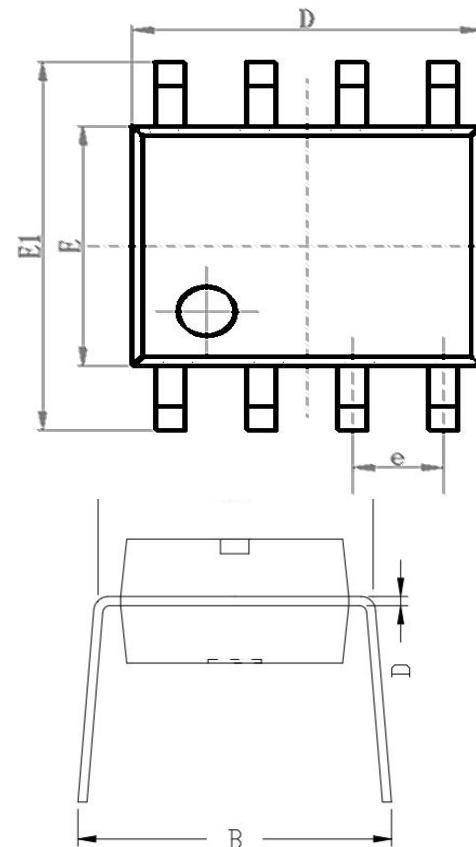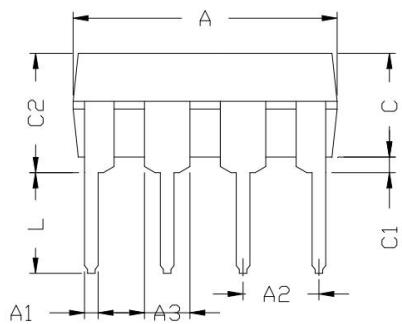

MSOP8 /8μMAX / VSSOP8 DIMENSIONS

PACKAGE SIZE

SYMBOL	MIN./mm	TYP./mm	MAX./mm
A	2.90	3.0	3.10
A1	0.28		0.35
A2	0.65TYP		
A3	0.375TYP		
B	2.90	3.0	3.10
B1	4.70		5.10
B2	0.45		0.75
C	0.75		0.95
C1			1.10
C2	0.328 TYP		
C3	0.152		
C4	0.15		0.23
H	0.00		0.09
θ	12°TYP		

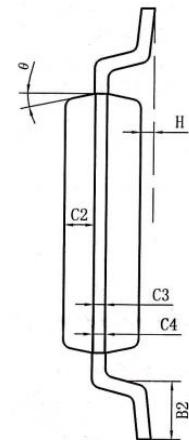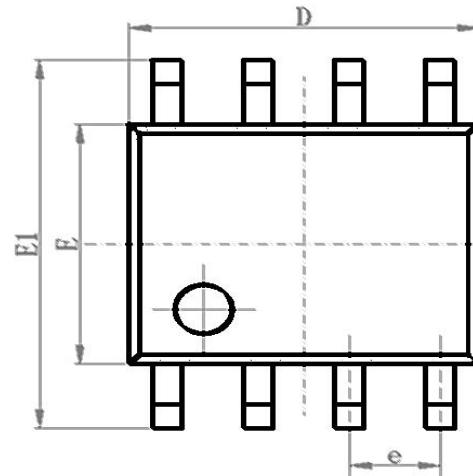

ORDERING INFORMATION

TYPE NUMBER	TEMPERATURE	PACKAGE
SIT3490EESA	-40°C~125°C	SOP8
SIT3490EEPA	-40°C~125°C	DIP8
SIT3490EEUA	-40°C~125°C	MSOP8/VSSOP8/8μMAX

Tapered package is 2500 pieces/disc.