


Push-in terminal block -UJ6-2.5FD - 421493

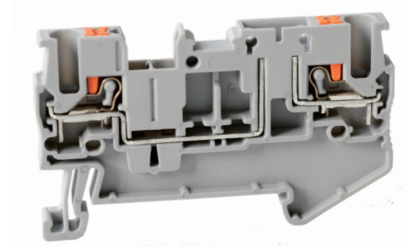

Push-in terminal block , rated voltage:500V , Max. operating current:20A, connection method : spring connection , number of connections : 2 , crimping range : 0.2mm² -4mm² , AWG : 24-12 , thickness:5.2mm , height: 35.2mm , color : grey , mounting type : TH35-7.5、TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	7
Layers	1
Number of connections	2
Rated cross section(mm ²)	2.5
Color	grey
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	500
Rated current(A)	20
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	13
Solid conductors(mm ²)	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm ²)	0.2-2.5
Stranded conductors AWG	24-14
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%

Dimension

Parameter	Data
Width(mm)	59.4
Thickness(mm)	5.2
Height(mm)	35.2