


Push-in terminal block-UJ6-6/2 × 2 - 421507

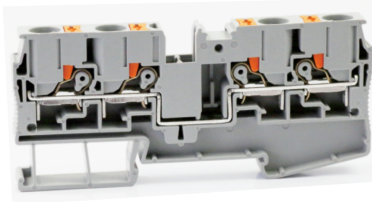

Push-in terminal block , rated voltage : 1000V , Max. operating current : 41A , connection method : spring connection , number of connections : 2 , crimping range : 0.5mm² -10 mm² , AWG : 20-10 , thickness:8.2mm , height:42.2mm , color : grey , mounting type : TH35-7.5、TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	28
NW per piece(g)	20.5
Layers	1
Number of connections	4
Rated cross section(mm ²)	6
Color	grey
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	1000
Rated current(A)	41
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	cUL [®] US
Certification logo	

Parameter	Data
	RoHS

Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	16
Solid conductors(mm ²)	0.5-10
Solid conductors AWG	20-10
Stranded conductors(mm ²)	0.5-6
Stranded conductors AWG	20-12
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%

Dimension

Parameter	Data
Width(mm)	94
Thickness(mm)	8.2
Height(mm)	42.2

Business data

Parameter	Data
End cover -UJ6-6/2 × 2G - 422119-Packing unit (PCS)	100
End cover -UJ6-6/2 × 2G - 422119-NW per piece(g)	5.5
End cover -UJ6-6/2 × 2G - 422119-Width(mm)	94
End cover- UJ6-6/2 × 2G - 422119-Thickness(mm)	2.2
End cover- UJ6-6/2 × 2G - 422119-Height(mm)	36.2