

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE

General information:

- 1.Material:PC
- 2.Colour:Light grey(RAL7032)
- 3.Operating temperature: -40°C~+125°C
- 4.Flammability acc.to UL94: V0
- 5.Degree of protection acc.to DIN EN60529 for coupled connector: IP65
- 6.Outgoing direction:Top outlet
- 7.Thread specifications:M/PG
- 8.Locking element
Lever type:Lever,plastic
Material:Polyamide
- 9.Hoods&Housings seal:NBR
- 10.Undimensioned Tolerances:




Pitch Range in mm		Nominal Dimension Range in mm							
To	Over	To	Over	To	Over	To	Over	To	0.1/10
6	10	10	24	30	60	100	150	150	≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

HOW TO ORDER:

S3A.P-BM-1L.M

- Locking lever — 1L: 1 levers(plastic) 2B: 2 bolts
2L: 2 levers(plastic) 4B: 4 bolts
1L.M: 1 levers(Metal)
2L.M: 2 levers(Metal)
- Housing type — SE: Side entry
SEH: Side entry—high construction
TE: Top entry
TEH: Top entry—high construction
BM: Bulkhead mounted
SM: Suface mounted
SMH: Suface mounted—high construction
CC: Cable to cable
CCH: Cable to cable high construction

- Sereies — S3A: 3A Compact type S6B: 6B Standard type
S10A: 10A Compact type S10B: 10B Standard type
S16A: 16A Compact type S16B: 16B Standard type
S32A: 32A Compact type S24B: S24B Standard type
S32B: S32B Standard type
S48B: S48B Standard type

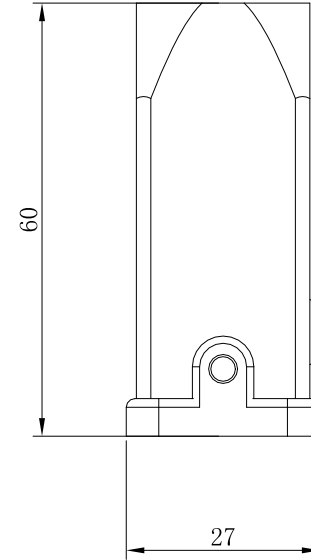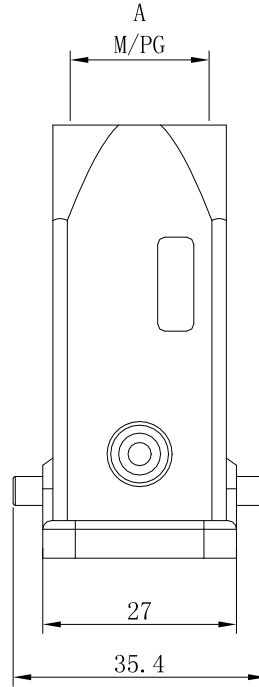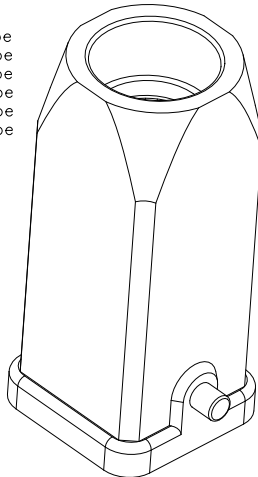

借通用件登记
Common Part

原图号
Old Draw. No.

底图总号
Assembly No.

Order number	A
S3A.P-TE-2B-M20	M20×1.5
S3A.P-TE-2B-PG11	PG11

订货号 Order No.	名称 Name	未注公差 Tolerance	表面 Surface
S3A.P-SE-2B-XXX	S3A.P项出线 双耳上壳	Tolerances Table	VDI21
项目 Item	签字 Signature	日期 Date	版本号 Revision Number
设计 Design	CHH	2024.07.08	重量 Weight
审核 Check	CHH	2024.07.08	比例 Scale
工艺 Process	-	-	第1页/共1页 1 of 1
标准化 Unify	-	-	mm
批准 Approve	XJ	2024.07.08	

SUPU 宁波普普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.