

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE

General information:

- 1.Material: Aluminium die-cast
- 2.Colour: Grey
- 3.Surface: Powder-coated
- 4.Operating temperature: -40°C~+125°C
- 5.Degree of protection acc.to DIN EN60529 for coupled connector: IP65
- 6.Outgoing direction: Top entry
- 7.Thread specifications: M/PG
- 8.Hoods&Housings seal: NBR
- 9.Undimensioned Tolerances:

Pitch Range in mm		Nominal Dimension Range in mm		Tolerance
Over	Under	Over	Under	
6	10	30	60	0.1/10
10	10	60	100	0.1
10	24	100	150	0.1
±0.15		±0.20	±0.30	±0.50
±0.30		±0.50	±0.70	±1.00
±1.00		±1.30	±2.0	±2.0




HOW TO ORDER:

S32B-BM-1L.M

Locking lever — 1L: 1 levers(plastic) 2B: 2 bolts
2L: 2 levers(plastic) 4B: 4 bolts
1L.M: 1 levers(Metal)
2L.M: 2 levers(Metal)

Housing type — SE: Side entry
SEH: Side entry-high construction
TE: Top entry
TEH: Top entry-high construction
BM: Bulkhead mounted
SM: Suface mounted
SMH: Suface mounted-high construction
CC: Cable to cable
CCH: Cable to cable high construction

Sereies — S3A: 3A Compact type S6B: 6B Standard type
S10A: 10A Compact type S10B: 10B Standard type
S16A: 16A Compact type S16B: 16B Standard type
S32A: 32A Compact type S24B: S24B Standard type
S32B: S32B Standard type
S48B: S48B Standard type

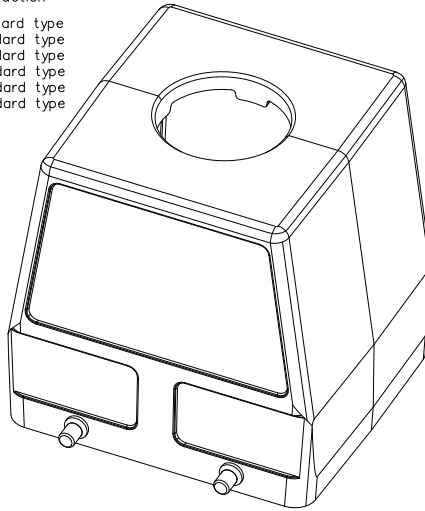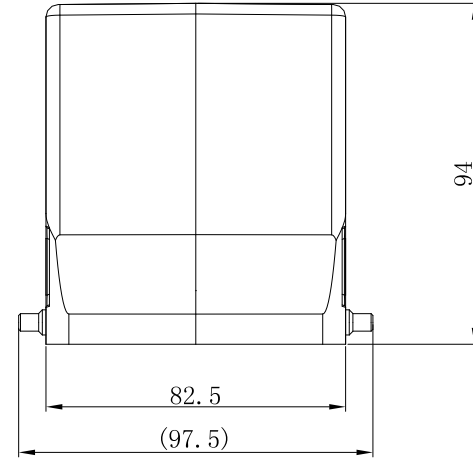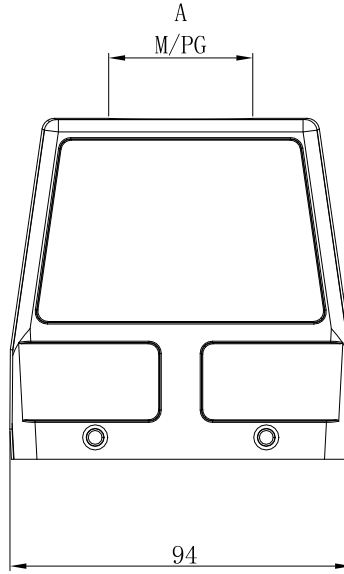

Order number	A
S32B-TE-4B-M32	M32×1.5
S32B-TE-4B-M40	M40×1.5
S32B-TE-4B-M50	M50×1.5
S32B-TE-4B-PG29	PG29
S32B-TE-4B-PG36	PG36
S32B-TE-4B-PG42	PG42

订货号 Order No.	S32B-TE-4B-XXX	名称 Name	S32B顶出线四耳上壳	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date		Tolerances Table	VDI21
设计 Design	CHH	2024.07.25	图号 Drawing No.	版本号 Revision Number	重量 Weight
审核 Check	CHH	2024.07.25	材料 Material	MO	比例 Scale
工艺 Process	-	-	物料号 Item No.	第1页/共1页 1 of 1	mm
标准化 Unify	-	-	...		
批准 Approve	XJ	2024.07.25	/		

SUPU 宁波盛普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.