


UTT Signal lightning protection series- UTT-2JD-110VAC-385010

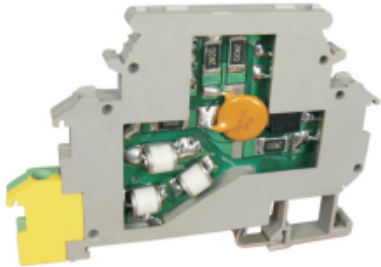

analog signal lightning protection, Rated operating voltage (DC / AC) :170V / 120V, Rate current 300 mA, Protection wire system: two-wires, Thickness(mm) 54.6mm, Height 6.2mm, Color, gray, installation methods: TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit(pcs)	/
NW per piece(g)	/
Color	gray
Shell material	PA
Protection degree	IP20
Rated operating voltage(DC)(V)	170V / 120V
Upper limit of operating voltage(V)	500
Rate current(mA)	300mA
Insulation material temperature	-40 ~ +125
Protection wire system	two-wires

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data
Protection type	floating signal double wire protection
Rated discharge current(KA)	5
Upper limit of discharge current(KA)	10
Output limit voltage(V)	≤ 250 / ≤ 650

Parameter	Data
Output residual voltage(V)	≤ 60 / -
Response time(NS)	≤ 1 / ≤ 100
Path resistance	9.4Ω
Wire(mm ²)	0.2-2.5
Operating temperature ()	-20 ~ +60
Ambient temperature (Storage/transportation) ()	-40 ~ +85
Relative humidity	30% ~ 90%
Connection in acc. with standard	GB / T18802.21-2004 IEC61643-21:2000
Protection degree	IP20

Dimension

Parameter	Data
Width(mm)	79.6
Thickness(mm)	54.6
Height(mm)	6.2