


SINGLE PHASE BRIDGE RECTIFIER

FEATURES

- Low cost
- This series is UL recognized
- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:260 °C/10 second, 0.375”(9.5mm) lead length at 5 lbs. (2.3kg) tension.

MECHANICAL DATA

- Case: Molded plastic body
- Terminal: Lead solderable per MIL-STD-202E method 208C.
- Polarity: Polarity symbols molded on case
- Mounting position: Any
- Weight:0.05ounce, 1.42grams

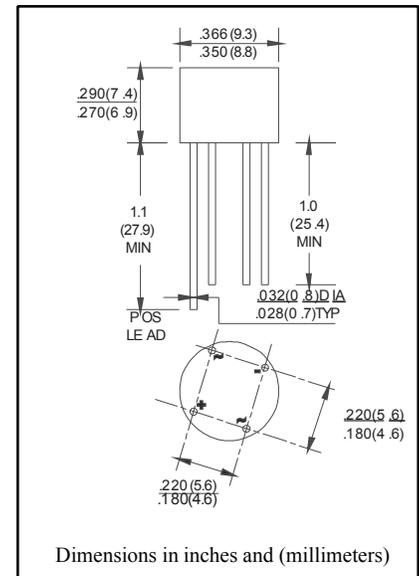

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load derate current by 20%.

PARAMETER	SYMBOLS	2W005M RC201	2W01M RC202	2W02M RC203	2W04M RC204	2W06M RC205	2W08M RC206	2W10M RC207	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at $T_A=50^{\circ}C$	$I_{(AV)}$	2.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							Amps
Rating for Fusing($t<8.3ms$)	I^2T	10							A^2S
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.0							Volts
Maximum DC Reverse Current at rated DC blocking voltage	$T_A=25^{\circ}C$	5.0							μ Amps
	$T_A=100^{\circ}C$	0.5							mAmps
Typical Junction Capacitance(Note1)	C_j	15							PF
Typical Thermal Resistance(Note2)	$R_{\theta JA}$	40							$^{\circ}C/W$
Operating Temperature Range	T_j	-55 to +150							$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150							$^{\circ}C$

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 volts.
2. Unit mounted on P.C. board with 0.22”×0.22”(5.5×5.5mm)copper pads,0.375”(9.5mm)lead length.

SINGLE PHASE BRIDGE RECTIFIER

RATING AND CHARACTERISTIC CURVES 2W005M - 2W10M

FIG.1-DERATING CURVE FOR
OUTPUT RECTIFIED CURRENT

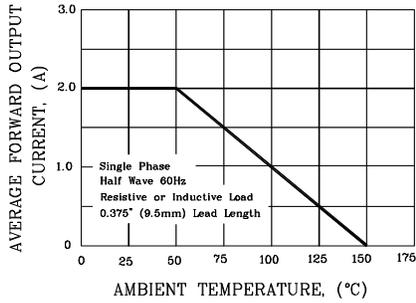


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER ELEMENT

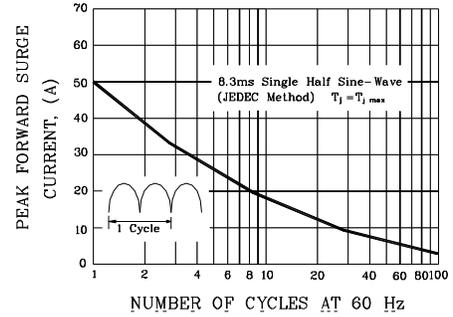


FIG.3-TYPICAL FORWARD CHARACTERISTICS
PER BRIDGE ELEMENT

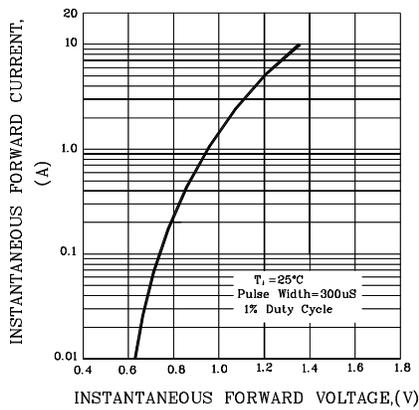


FIG.4-TYPICAL REVERSE CHARACTERISTICS
PER BRIDGE ELEMENT


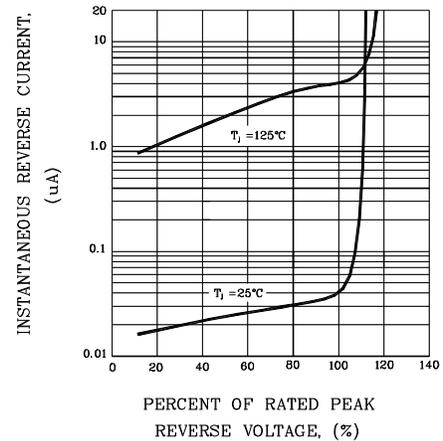


FIG.5-TYPICAL JUNCTION CAPACITANCE
PER BRIDGE ELEMENT

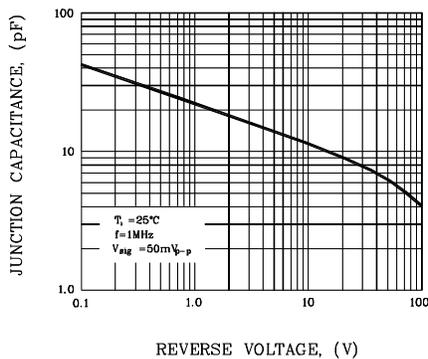

Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.