





KAN0611-0431B 6x6x4.3 mm



[SPECIFICATION]

Contact Resistance: $\leq 100\text{m}\Omega$
Insulation Resistance: $\geq 100\text{M}\Omega$
Withstand Voltage : 250V, AC/minute
Temperature Range : $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$

Rated Load : 12V DC 50mA
Operation Force :
Life : 50000

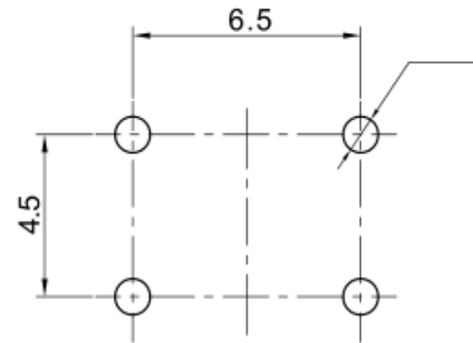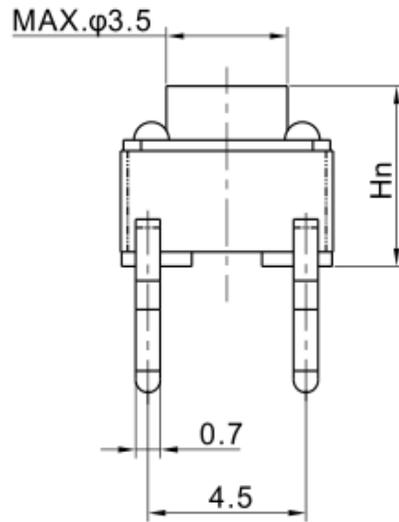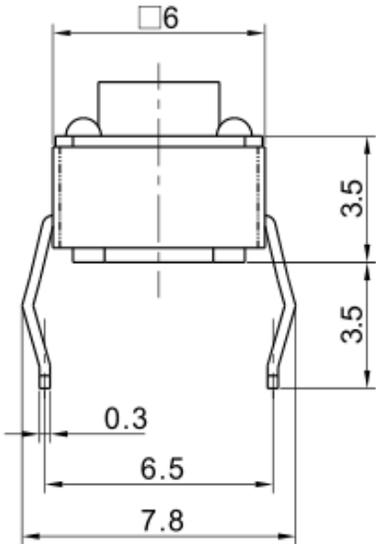

H=4.3

Can be customized according to customer requirements