



VB

铝电解电容器-贴片型

Aluminum electrolytic capacitor- SMD type

特点 Features

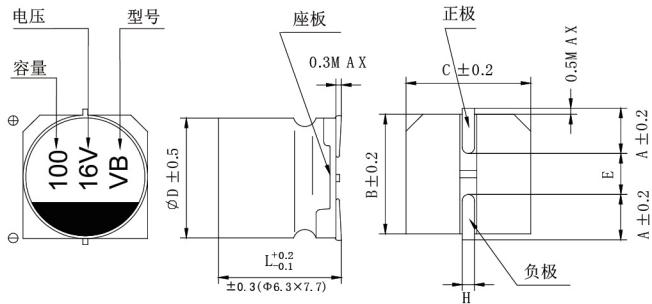
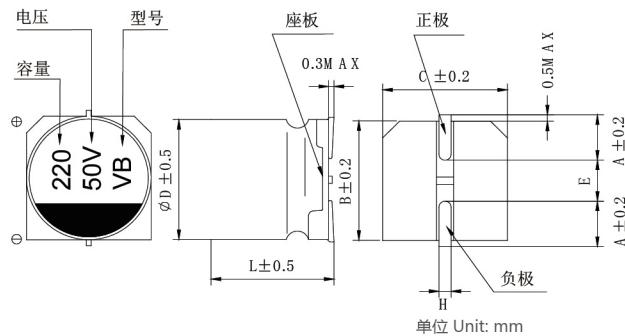
- ◆ 低阻抗。Low impedance.
- ◆ 适用于再流焊。Reflow soldering is available.
- ◆ 适用于高密度表面组装。available for high density surface mounting.
- ◆ 工作温度范围宽 (-55°C ~ +105°C) Operating over wide temperature range.
- ◆ RoHS指令 (2002/95/EC) 已对应完毕。Adapted to the RoHS directive (2002/95/EC).



主要技术性能 Specifications

项目 Items	特性 Performance Characteristics									
工作温度范围 Operating Temperature Range	-55°C~+105°C									
额定电压范围 Rated Voltage Range	6.3V~100V									
标称电容量范围 Nominal Capacitance Range	4.7~2200μF									
标称电容量允许偏差 Capacitance Tolerance	±20% (20°C , 120Hz)									
漏电流 Leakage Current	$I \leq 0.01CRVR$ or $3(\mu A)$, 取较大者 (2分钟) CR : 标称电容量 (μF) UR : 额定电压 (V) $I \leq 0.01CRVR$ or $3(\mu A)$ Whichever is greater(at 20°C, after 2 minutes) CR: Nominal Capacitance (μF) UR: Rated voltages (V)									
损耗角正切 (tgδ) Dissipation Factor (Max) 20°C, 120Hz	U _R (V)	6.3	10	16	25	35	50	63	80	100
	tgδ	0.26	0.20	0.16	0.14	0.12	0.12	0.10	0.08	0.07
耐久性 Load Life	+ 105°C 施加额定电压2000小时后, 电容器应满足以下要求: After 2000 hours application of rated voltage at 105°C, the capacitor shall meet the following requirement:									
	电容量变化率 Capacitance Change		±30%初始值以内 Within ±30% of the initial value							
	损耗角正切 Dissipation Factor		≤ 300%初始规定值 Not more than 300% of the initial specified value							
	漏电流 Leakage Current		≤ 初始规定值 Not more than the initial specified value							
高温贮存 Shelf Life	+ 105°C 贮存1000小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +105°C, the capacitors shall meet the requirement of load life above									
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U _R (V)	6.3	10	16	25	35	50	63	80	100
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	2	2
	Z(-55°C)/Z(+20°C)	8	5	4	3	3	3	3	3	3
耐焊接热 Resistance to Soldering Heat	在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.									
	电容量变化率 Capacitance Change		±10%初始值以内 Within ±10% of the initial value							
	损耗角正切 Dissipation Factor		≤ 初始规定值 Not more than the initial specified value							
	漏电流 Leakage Current		≤ 初始规定值 Not more than the initial specified value							

外形图及尺寸表 Case Size Table

 $\Phi 4 \sim \Phi 6.3$  $\Phi 8 \sim \Phi 12.5$ 

单位 Unit: mm

	4×5.4	5×5.4	6.3×5.4	6.3×7.7	8×10.5	10×10.5	10×12.5	12.5×13.5
A	1.35	2.1	2.4	2.4	2.9	3.2	3.2	4.7
B	4.3	5.3	6.6	6.6	8.3	10.3	10.3	13
C	4.3	5.3	6.6	6.6	8.3	10.3	10.3	13
E	1.0	1.3	2.2	2.2	3.1	4.5	4.5	4.5
L	5.4	5.4	5.4	7.7	10.5	10.5	12.5	13.5
H	0.5~0.8				0.8~1.1			

标称电容量、额定电压、额定纹波电流与尺寸对应表

Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

电压 WV (Vdc)	容量 Cap (μ F)	产品尺寸 Size	纹波电流 mArms 100KHz/105°C	阻抗 Impedance (Ω) 100KHz/25°C	电压 WV (Vdc)	容量 Cap (μ F)	产品尺寸 Size	纹波电流 mArms 100KHz/105°C	阻抗 Impedance (Ω) 100KHz/25°C
6.3	22	4×5.4	80	1.8	35	10	5×5.4	150	0.76
	100	5×5.4	150	0.76		22	6.3×5.4	230	0.44
	220	6.3×5.4	230	0.44		47	6.3×7.7	280	0.34
	330	6.3×7.7	280	0.34		100	8×10.5	600	0.17
	470	8×10.5	600	0.17		220	10×10.5	850	0.09
	1000	10×10.5	850	0.09		470	10×12.5	1000	0.075
	1500	10×12.5	1000	0.075		330	12.5×13.5	1190	0.06
	2200	12.5×13.5	1190	0.06		4.7	4×5.4	30	5
10	22	4×5.4	80	1.8	50	10	5×5.4	85	1.52
	47	5×5.4	150	0.76		22	6.3×5.4	165	0.88
	100	6.3×5.4	230	0.44		47	6.3×7.7	185	0.68
	220	6.3×7.7	280	0.34		100	8×10.5	300	0.34
	470	8×10.5	600	0.17		220	10×10.5	670	0.18
	1000	10×10.5	850	0.09		330	12.5×13.5	650	0.12
16	1500	12.5×13.5	1190	0.06	63	4.7	5×5.4	50	3
	10	4×5.4	80	1.8		10	6.3×5.4	80	1.75
	22	5×5.4	150	0.76		22	6.3×7.7	120	1.2
	100	6.3×5.4	230	0.44		47	8×10.5	250	0.65
	220	6.3×7.7	280	0.34		100	10×10.5	400	0.35
	330	8×10.5	600	0.17		220	12.5×13.5	720	0.15
25	470	10×10.5	850	0.09	80	10	6.3×7.7	60	2.4
	1000	12.5×13.5	1190	0.06		22	8×10.5	130	1.3
	10	4×5.4	80	1.8		47	10×10.5	200	0.7
	22	5×5.4	150	0.76		220	12.5×13.5	470	0.32
	47	6.3×5.4	240	0.44		10	6.3×7.7	60	2.4
	100	6.3×7.7	280	0.34		22	8×10.5	130	1.3
25	220	8×10.5	600	0.17		47	10×10.5	200	0.7
	470	10×10.5	850	0.09		100	12.5×13.5	460	0.45
	560	10×12.5	1000	0.075					
	680	12.5×13.5	1190	0.06					

额定纹波电流频率修正系数

Frequency correction factor for ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	$\geq 10KHz$
Coefficient 系数	0.35	0.50	0.64	0.83	1.00

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承认书，并以此为基准使用。
The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.