

# HF33F-G

## SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:125661



File No.:CQC12002076530



### Features

- 10A switching capability
- Creepage distance: 8mm
- Clearance distance: H type 4.5mm,Z type 4mm
- 1 Form A and 1 Form C configurations
- UL insulation system: Class F
- Product in accordance to IEC 60335-1 available
- Plastic sealed and flux proofed types available
- Shape and Pin compatible with HF33F

**RoHS compliant**

### CONTACT DATA

Contact arrangement	1H、1Z		
Contact resistance	100mΩ max.(at 1A 6VDC)		
Contact material	AgSnO <sub>2</sub>		
Contact rating (Res. load)	1H	1Z	
		NO	NC
	10A 250VAC	10A 250VAC	5A 250VAC
Max.switching current	10A		5A
Max.switching power	2500VA		1250VA
Max.switching voltage	277VAC		
Mechanical endurance	5 x 10 <sup>6</sup> OPS		
Electrical endurance	NO:1 x 10 <sup>5</sup> OPS(10A 250VAC, Resistive load, 40°C, 1s on 9s off)		
	NC:1 x 10 <sup>5</sup> OPS(10A 250VAC, Resistive load, 40°C, 1s on 9s off)		

### COIL

Coil power	Standard: Approx. 450mW; Sensitive: Approx. 200mW
------------	--

### COIL DATA

at 23°C

#### Standard Type

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48	36.0	2.40	62.4	5120 x (1±10%)

#### Sensitive type

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC	Coil Resistance Ω
3	2.25	0.15	3.9	45 x (1±10%)
5	3.75	0.25	6.5	125 x (1±10%)
6	4.50	0.30	7.8	180 x (1±10%)
9	6.75	0.45	11.7	400 x (1±10%)
12	9.00	0.60	15.6	720 x (1±10%)
18	13.5	0.90	23.4	1600 x (1±10%)
24	18.0	1.20	31.2	2800 x (1±10%)
48	36.0	2.40	62.4	11520 x (1±10%)

**Notes:** 1) The data shown above are initial values.

2) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

**Notes:** The data shown above are initial values.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2022 Rev. 1.00

## SAFETY APPROVAL RATINGS

<b>VDE</b>	1H	AgSnO <sub>2</sub>	10A 250VAC/277VAC, 85°C 10A 30VDC, 40°C 5A 250VAC/277VAC, 105°C 10A 250VAC/277VAC, 105°C(only for sensitive type) Makiing 4.4A 277VAC/Breking 2.2A 277VAC, 105°C
	1Z	AgSnO <sub>2</sub>	NO:10A 250VAC/277VAC, 85°C NO:10A 30VDC, 40°C NO:Makiing 4.4A 277VAC/Breking 2.2A 277VAC, 105°C NC:5A 250VAC/277VAC, 85°C NC:10A 30VDC, 40°C
<b>UL/CUL<sup>(1)</sup></b>	1H	AgSnO <sub>2</sub>	10A 250VAC/277VAC, 40°C 10A 250VAC/277VAC, 85°C 10A 30VDC, 85°C TV-5 120VAC/240VAC, 85°C(only for standard type) 1/2HP 250VAC, 85°C 1/3HP 125VAC, 85°C Electronic Ballast, 1A 120VAC, 85°C 10A 250VAC/277VAC, 105°C(only for sensitive type)
	1Z	AgSnO <sub>2</sub>	NO:10A 250VAC/277VAC, 40°C NO:10A 250VAC/277VAC, 85°C NO:10A 30VDC, 85°C NO:TV-5 120VAC/240VAC, 85°C(only for standard type) NO:1/2HP 250VAC, 85°C NO:1/3HP 125VAC, 85°C NO:Electronic Ballast, 1A 120VAC, 85°C NO:10A 250VAC/277VAC, 105°C(only for sensitive type)
<b>CQC</b>	1H	AgSnO <sub>2</sub>	NC:5A 250VAC/277VAC, 40°C NC:5A 250VAC/277VAC, 85°C NC:5A 30VDC, 85°C 10A 250VAC, 85°C
	1Z	AgSnO <sub>2</sub>	NO:10A 250VAC, 85°C NC:5A 250VAC, 85°C NC:5A 30VDC, 85°C

**Notes:** 1) Opening the vent hole under contact material Plastic sealed types testing.

2) Only typical loads are listed above. Other load specifications can be available upon request.

## ORDERING INFORMATION

HF33F-G /		12	-H	S	L	T	F	(XXX)
Type								
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC							
Contact arrangement H:	1 Form A	Z:	1 Form C					
Construction <sup>1)2)</sup>	S: Plastic sealed	Nil: Flux proofed						
Coil power	L: Sensitive 200mW(H type only)	Nil: Standard	450mW					
Contact material	T: AgSnO <sub>2</sub>							
Insulation standard	F: Class F							
Special code	XXX: Customer special requirement			Nil: Standard				

**Notes:** 1) Under the ambience with dangerous gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, plastic sealed type is recommended; Please test the relay in real applications.

If the ambience allows, flux proofed type is preferentially recommended.


2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

### Outline Dimensions


1 Form A

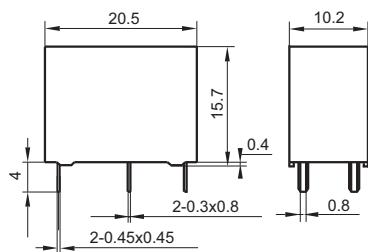


### Wiring Diagram (Bottom view)

(Bottom view)


### PCB Layout (Bottom view)



1 Form C

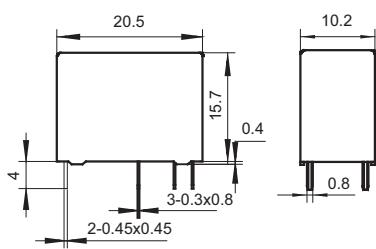


(Bottom view)




- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.  
 3) Mesh width is 2.54mm.

## CHARACTERISTIC CURVES


### MAXIMUM SWITCHING POWER



### ENDURANCE CURVE



### COIL TEMPERATURE RISE

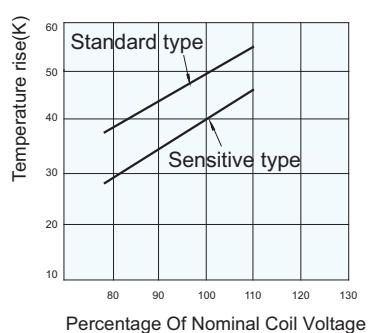

#### Notes:

- Curve A: NO contact  
 Curve B: NC contact

#### Test conditions:

- A: NO, 250VAC/277VAC, Resistive load  
 flux proofed type, Room temp, 1s on 9s off  
 B: NC, 250VAC/277VAC, Resistive load  
 flux proofed type, Room temp, 1s on 9s off

Test conditions: 10A at 85°C

Mounting distance: 10mm

## Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.