

# DC/DC Converter

## URA\_S-6WR3 Series

# MORNSUN®

6W isolated DC-DC converter in SIP package  
Ultra-wide input and regulated dual output



Patent Protection



Report  
EN62368-1



Report  
BS EN62368-1

RoHS

## FEATURES

- Ultra-wide 4:1 input voltage range
- High efficiency up to 85%
- No-load power consumption as low as 0.24W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current protection
- Operating ambient temperature range: -40°C to +85°C
- Industry standard pin-out

URA\_S-6WR3 series of isolated 6W DC-DC converter products with an ultra-wide 4:1 input voltage range. They feature efficiencies of up to 85%, 1500VDC input to output isolation, operating ambient temperature range of -40°C to +85°C, input under-voltage protection, output short-circuit, over-current protection and they are widely used in applications such as medical care, industrial control, electric power, instruments and communication fields.

## Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency <sup>②</sup> (%) Min./Typ.	Capacitive Load <sup>③</sup> (μF)Max.
		Nominal (Range)	Max. <sup>①</sup>	Voltage(VDC)	Current (mA) Max./Min.		
EN/BS EN	URA2405S-6WR3	24 (9-36)	40	±5	±600/0	78/80	470
	URA2409S-6WR3			±9	±333/0	81/83	220
	URA2412S-6WR3			±12	±250/0	81/83	120
	URA2415S-6WR3			±15	±200/0	81/83	100
	URA2424S-6WR3			±24	±125/0	80/82	68
--	URA4815S-6WR3	48 (18-75)	80	±15	±200/0	83/85	68

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
- ② Efficiency is measured at nominal input voltage and rated output load;
- ③ The specified maximum capacitive load for positive and negative output is identical.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	±5V output	--	313/12	320/16	mA
		±9V/±12V/±15V output	--	301/12	309/16	
		±24V output	--	305/12	313/16	
	48VDC nominal input series, nominal input voltage	±15V output	--	147/5	151/16	
Reflected Ripple Current		--	50	--		
Surge Voltage (1sec. max.)	24VDC nominal input series	-0.7	--	50	VDC	
	48VDC nominal input series	-0.7	--	100		
Start-up Voltage	24VDC nominal input series	--	--	9		
	48VDC nominal input series	--	--	18		
Input Under-voltage Protection	24VDC nominal input series	5.5	6.5	--		
	48VDC nominal input series	13	14.5	--		
Input Filter		Capacitance Filter				
Hot Plug		Unavailable				
Ctrl *	Module on	Ctrl pin open or pulled high (3.5-12VDC)				
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)				
	Input current when off	--	6	10	mA	

Note: \*The Ctrl pin voltage is referenced to input GND.

# MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.09.21-A/5

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy <sup>①</sup>	5%-100% load	Vo1	--	±1.5	±2	%
		Vo2	--	±2	±3	
Linear Regulation	Input voltage variation from low to high at full load	Vo1	--	±0.5	±1	
		Vo2	--	±1.0	±1.5	
Load Regulation <sup>②</sup>	5%-100% load	Vo1	--	±0.8	±1.5	
		Vo2	--	±1.2	±2	
Cross Regulation	Dual output, Vo1 load at 50%, Vo2 load at range of 25%-100%		--	--	±5	
Transient Recovery Time	25% load step change, nominal input voltage		--	450	500	μs
Transient Response Deviation	25% load step change, nominal input voltage	±5V output	--	±5	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Ripple & Noise <sup>③</sup>	20MHz bandwidth, 5%-100% load		--	120	150	mV p-p
Over-current Protection	Input voltage range		110	160	230	%Io
Short-circuit Protection	Input voltage range	Continuous, self-recovery				
Note:						
① At 0%~5% load, the Vo1 Max. output voltage accuracy is ±3%, the Vo2 Max. output voltage accuracy is ±5%;						
② At 0%~100% load, the Vo1 regulation for 0%~100% load is ±4%, the Vo2 regulation for 0%~100% load is ±4.5%;						
③ Under 0%~5% load conditions, ripple & noise does not exceed 180mV. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.						

### General Specification

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output insulation at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Humidity	Without condensation	5	--	95	%RH
Storage Temperature		-55	--	+125	°C
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency *	PWM mode	--	500	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours
Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.					

### Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)
Dimensions	22.00 x 9.50 x 12.00 mm
Weight	4.6g (Typ.)
Cooling method	Free air convection



### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (24VDC nominal input series: see Fig.3-② for recommended circuit) (48VDC nominal input series: see Fig.4-① for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (24VDC nominal input series: see Fig.3-② for recommended circuit) (48VDC nominal input series: see Fig.4-① for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A

Immunity	EFT	IEC/EN61000-4-4 ±2kV (24VDC nominal input series: see Fig.3-① for recommended circuit) (48VDC nominal input series: see Fig.4-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5 line to line ±2kV (24VDC nominal input series: see Fig.3-① for recommended circuit) (48VDC nominal input series: see Fig.4-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6 3 Vr.m.s	perf. Criteria A

Typical Characteristic Curves

URA24xxS-6WR3 Series

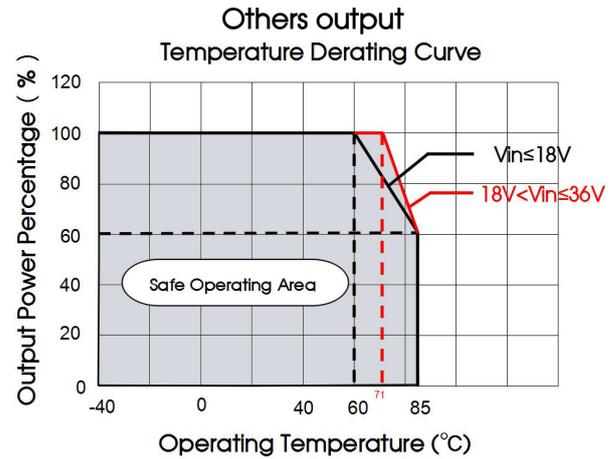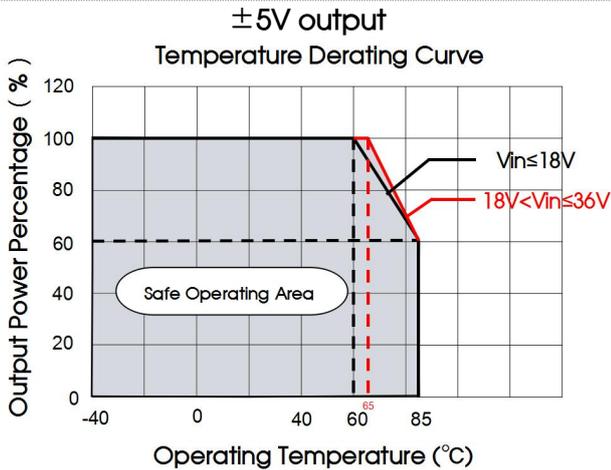

URA48xxS-6WR3 Series




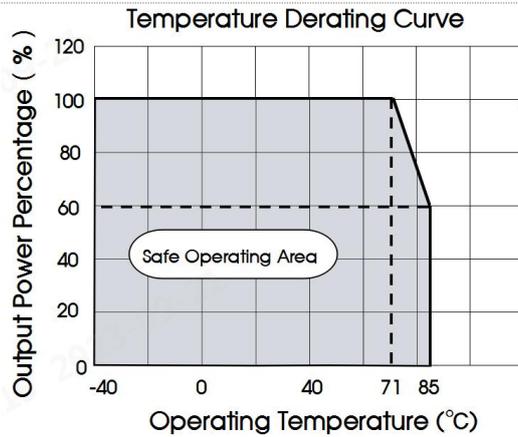


Fig. 1

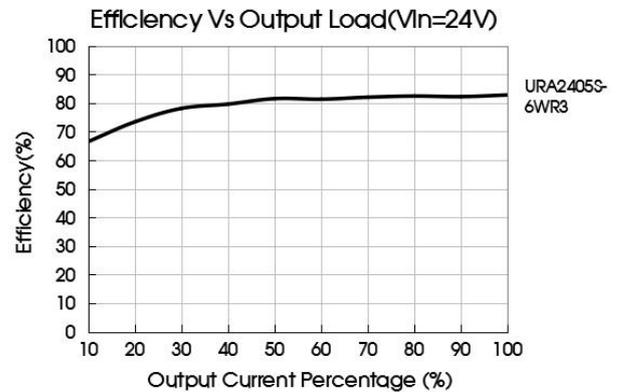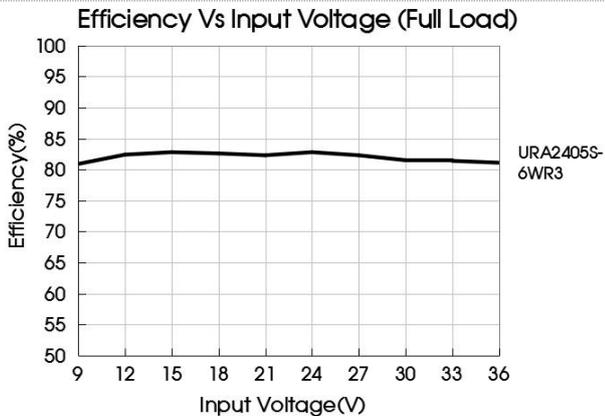

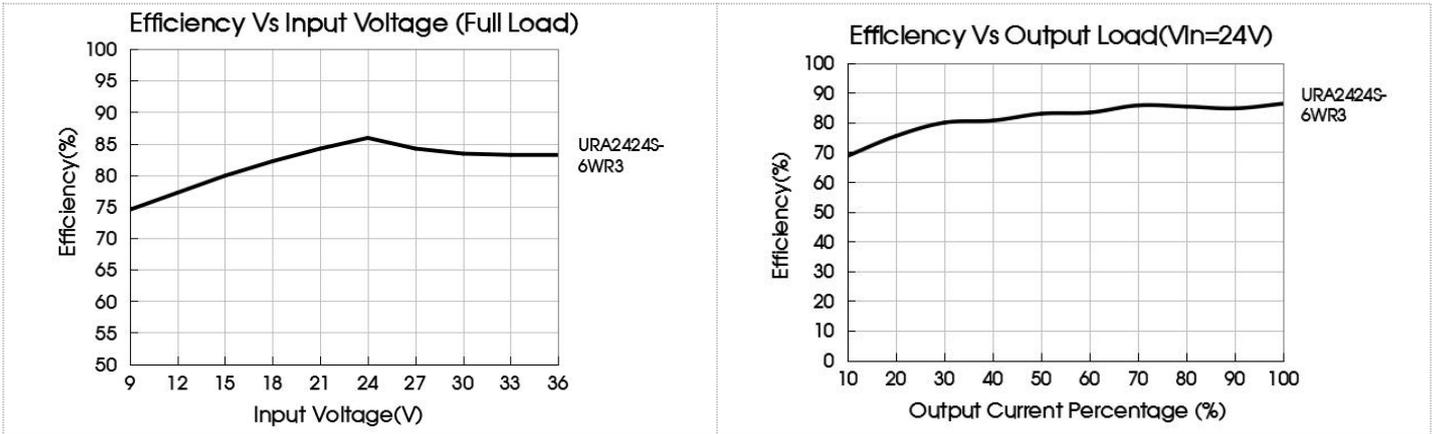

**Design Reference**

**1. Typical application**

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 2

Vin	Cin	Cout
24VDC	100μF/100V	22μF/50V
48VDC	100μF/100V	22μF/50V

**2. EMC compliance circuit**

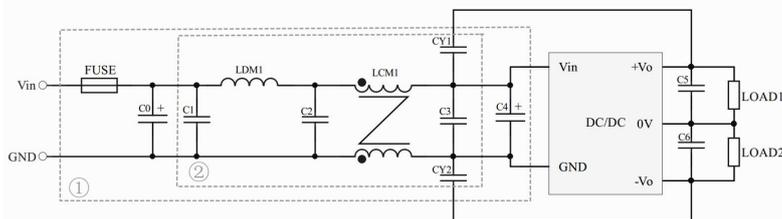


Fig. 3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs

Parameter description:

Components	Vin: 24VDC
FUSE	Choose according to actual input current
C0/C4	330μF/100V
C1/C2/C3	10μF/50V
LDM1	10uH
LCM1	1.4-1.7mH (TN150P-RH12.7*12.7*7.9)
CY1/CY2	1nF/2kV

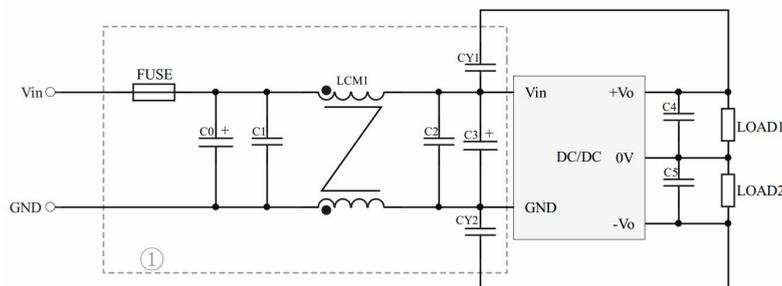


Fig. 4

Notes: For EMC tests we use Part ① in Fig. 4 for immunity and emissions test.


Parameter description:

Components	Vin: 48VDC
FUSE	Choose according to actual input current
C0	200μF/100V
C1/C2	10μF/100V
LCM1	470μH (Recommend use MORNSUN FL2D-13-471R3)
C3	330μF/100V
CY1/CY2	1nF/400VAC
C4/C5	22μF/50V

3. The products do not support parallel connection of their output

4. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

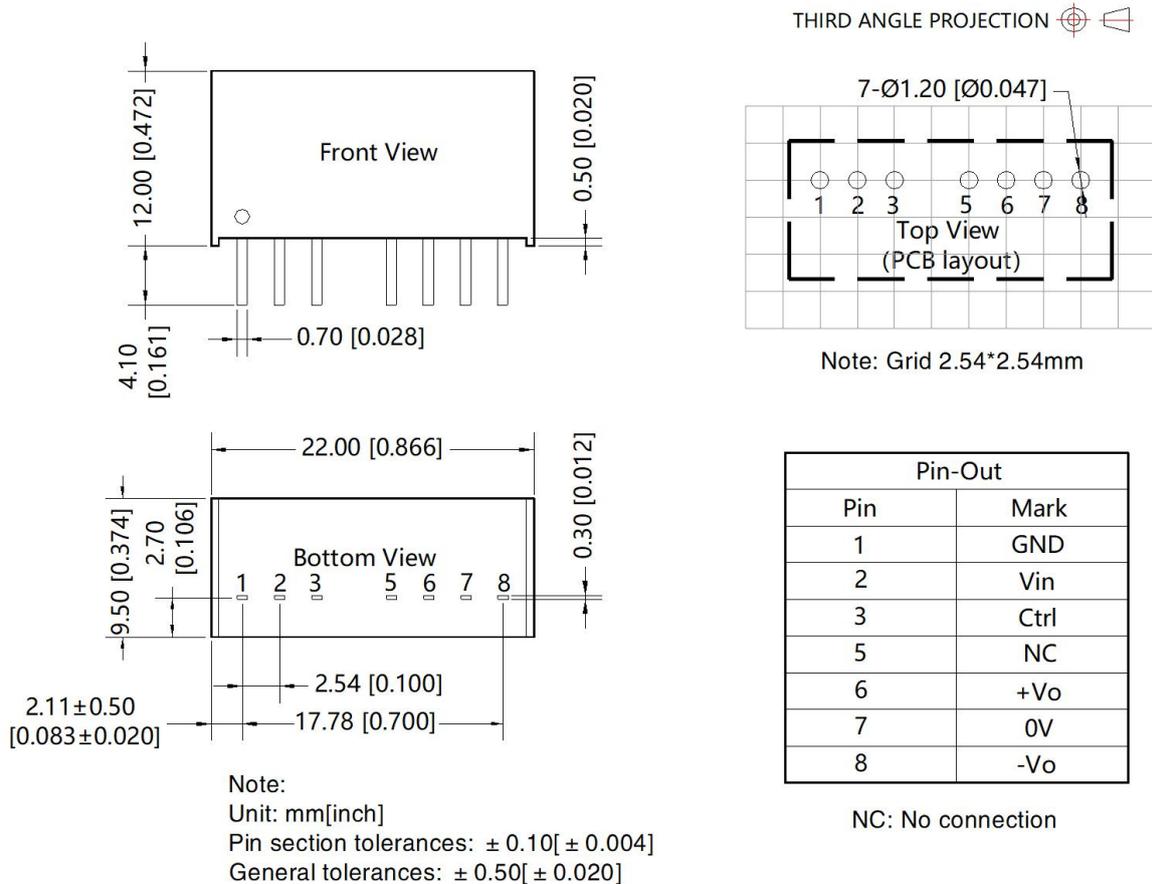

- Note:
- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). packaging number: 58210004;
  - The maximum capacitive load offered were tested at input voltage range and full load;
  - Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
  - All index testing methods in this datasheet are based on company corporate standards;
  - We can provide product customization service, please contact our technicians directly for specific information;
  - Products are related to laws and regulations: see "Features" and "EMC";
  - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)