

CDL series

- Low impedance, 105°C 5000 hour.
- Applicable to SMT process.
- RoHS Compliance.
- 105°C低阻抗、5000hours長壽命產品。
- 適用於SMT製程。



SPECIFICATIONS

Items 項目	Characteristics 特性									
Capacitance Tolerance 靜電容量誤差	$\pm 20\%$ (120Hz,20°C)									
Operating Temperature Range 適用溫度範圍	-55 ~ +105°C									
Rated Voltage Range 額定電壓範圍	6.3~100VDC									
Capacitance Range 靜電容量範圍	22~1500μF									
Leakage Current 洩漏電流	$I \leq 0.01CV$ or 3 (μ A), which is greater. (After 2 minutes application of DC rated voltage, at 20°C)									
Dissipation Factor 散逸因素($\tan \delta$)	Measurement Frequency: 120Hz. Temperature: 20°C									
	Rated Voltage(V)	6.3	10	16	25	35	50	63	80	100
	$\tan \delta$ (Max)	0.3	0.26	0.22	0.16	0.14	0.14	0.08	0.08	0.07
Low Temperature Stability 低溫特性	Measurement Frequency: 120Hz.									
	Rated Voltage(V)	6.3	10	16	25	35	50	63	80	100
Impedance Ratio(Max) 阻抗比率(最大值)	Z(-25°C)/Z(20°C)	4	3	2	2	2	2	2	2	2
	Z(-55°C)/Z(20°C)	8	5	4	3	3	3	3	3	3
Load Life 負荷壽命	5000hours,with application of rated voltage at 105°C									
	Capacitance Change	Within $\pm 30\%$ of Initial Value								
	$\tan \delta$	300% or less of Initial Specified Value								
	Leakage Current	Initial Specified Value or less								
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.									
	Capacitance Change	Within $\pm 30\%$ of Initial Value								
	$\tan \delta$	300% or less of Initial Specified Value								
	Leakage Current	Initial Specified Value or less								
Resistance to Soldering Heat 焊錫耐熱性	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature they meet the characteristics requirements listed at right.						Capacitance Change	Within $\pm 10\%$ of Initial Value		
							$\tan \delta$	Initial Specified Value		
							Leakage Current	Initial Specified Value or less		
Standards 參照標準	JIS C 5101-4-1 (IEC 60384)									

Frequency Coefficient of Permissible Ripple Current

Frequency (Hz)	$120 \leq F < 1K$	$1K \leq F < 10K$	$10K \leq F < 100K$	$100K \leq F$
≤ 33	0.35	0.70	0.90	1.00
33 ~ 150	0.40	0.85	0.92	1.00
> 150	0.60	0.85	0.95	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use , the rms ripple current has to be reduced.

CDL

CDL series

DIMENSIONS(mm)

■ Chip Type

Fig.1 ØD=8~10mm






Fig.2 ØD≥12.5mm

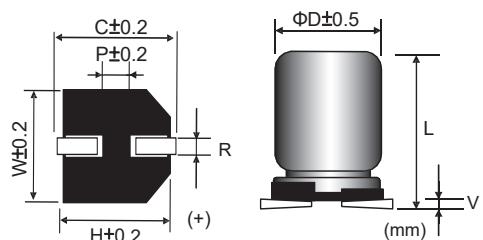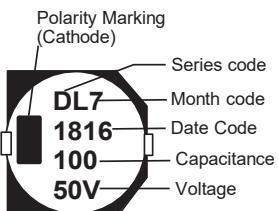

(mm)

Size	ØD	L±0.5	W	H	C	R	P	Vmax
8x10	8.0	10.0	8.3	8.3	9.0	0.7~1.1	3.2	0.3
10x10	10.0	10.0	10.3	10.3	11.0	0.7~1.3	4.5	0.3
12.5x13.5	12.5	13.5	13.0	13.0	13.7	1.1~1.4	4.5	0.4
16x16.5	16.0	16.5	17.0	17.0	18.0	1.1~1.4	6.4	0.4

STANDARD RATINGS

D×L(mm); R.C.(mA rms) at 105°C 100KHz, IMP(Ω max) at 20°C 100KHz.

Cap (μF)	V	6.3			10			16			25			35			
		Item	D x L	R.C.	IMP	D x L	R.C.	IMP									
100															8x10	600	0.17
150												8x10	600	0.17	8x10	600	0.17
220												8x10	600	0.17	10x10	850	0.09
330				8x10	600	0.17	8x10	600	0.17	8x10	600	0.17					
470	8x10	600	0.17	8x10	600	0.17	8x10	600	0.17	10x10	850	0.09	12.5x13.5	1100	0.06		
680	8x10	600	0.17	10x10	850	0.09	10x10	850	0.09	12.5x13.5	1100	0.06	12.5x13.5	1100	0.06		
1000	8x10	600	0.17	10x10	850	0.09	10x10	850	0.09	12.5x13.5	1100	0.06	16x16.5	1800	0.035		
1500	10x10	850	0.09	12.5X13.5	1100	0.06	12.5X13.5	1100	0.06	16X16.5	1800	0.035	16x16.5	1800	0.035		
2200	12.5X13.5	1100	0.06	12.5X13.5	1100	0.06				16X16.5	1800	0.035					
3300							16X16.5	1800	0.035								
4700				16X16.5	1800	0.035											
6800	16X16.5	1800	0.035														

Cap (μF)	V	50			63			80			100			
		Item	D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP	D x L	R.C.	IMP
22												8x10	130	1.88
33								8x10	130	1.88	10x10	200	0.65	
47					8x10	200	0.70	10x10	200	0.90	12.5X13.5	500	0.32	
56	8x10	330	0.34	10x10	369	0.48					12.5X13.5	500	0.32	
68	8x10	330	0.34											
100	8x10	330	0.34	12.5X13.5	800	0.16	12.5X13.5	500	0.32	16X16.5	793	0.17		
150	10x10	670	0.18	12.5X13.5	800	0.16	12.5X13.5	500	0.32	16X16.5	793	0.17		
220	10x10	670	0.18	12.5X13.5	800	0.16								
330	12.5X13.5	900	0.12	16X16.5	1410	0.082	16X16.5	793	0.17					
470	16X16.5	1610	0.073	16X16.5	1410	0.082								
680	16X16.5	1610	0.073											
1000	16X16.5	1610	0.073											