

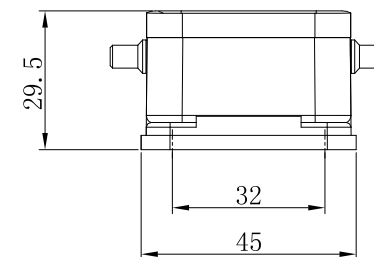


未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

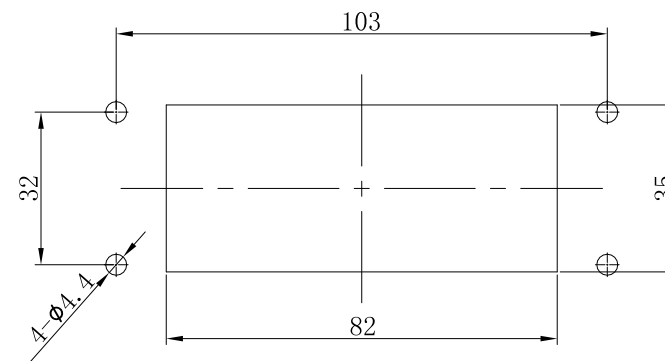

- 1.Material: Aluminium die-cast
- 2.Colour: Grey
- 3.Surface: Powder-coated
- 4.Operating temperature: -40°C~+125°C
- 5.Degree of protection acc.to DIN EN60529 for coupled connector: IP65
- 6.Outgoing direction: Bottom entry
- 7.Hoods&Housings seal: NBR
- 8.Undimensioned Tolerances:

Pitch Range In mm				Nominal Dimension Range In mm				 
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	0.1/10 

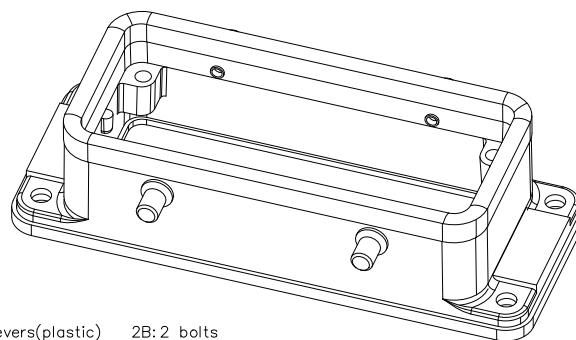

S16B-BM-1L.M

└─ Locking lever ─ 1L: 1 levers(plastic) 2B: 2 bolts
 2L: 2 levers(plastic) 4B: 4 bolts
 1L.M: 1 levers(Metal)
 2L.M: 2 levers(Metal)

—Housing type — SE: Side entry
SEH: Side entry—high construction
TE: Top entry
TEH: Top entry—high construction
BM: Bulkhead mounted
SM: Surface mounted
SMH: Surface mounted—high construction
CC: Cable to cable
CCH: Cable to cable high construction

Series	S3A: 3A Compact type	S6B: 6B Standard type
	S10A: 10A Compact type	S10B: 10B Standard type
	S16A: 16A Compact type	S16B: 16B Standard type
	S32A: 32A Compact type	S24B: S24B Standard type
		S32B: S32B Standard type
		S48B: S48B Standard type

订货号 Order No.	S16B-BM-4B		名 称 Name	S16B开孔安装 四耳底座	未注公差 Tolerance	表面 Surface	
项 目 Item	签 字 Signature	日 期 Date			Tolerances Table	VDI21	
设 计 Design	CHH	2024.07.18	图 号 Drawing No.	/	版本号 Revision Number	重量 Weight	比例 Scale
审 核 Check	CHH	2024.07.18	材 料 Material	/	M0	/	1:1
工 艺 Process	-	-	物料号 Item No.	/	第1页/共1页 1 of 1	 mm	
标准化 Unify	-	-		...	 宁波盛普电子有限公司 NINGBO SUPU ELECTRONICS CO.,LTD		
批 准 Approve	XJ	2024.07.18		/			

SUPU 宁波捷普电子有限公司

NINGBO SUPU ELECTRONICS CO.,LTD