

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE

General information:




- 1.Material: Aluminium die-cast
- 2.Colour: Grey
- 3.Surface: Powder-coated
- 4.Operating temperature: -40℃~+125℃
- 5.Degree of protection acc.to DIN EN60529 for coupled connector: IP65
- 6.Outgoing direction: Top entry
- 7.Thread specifications: M/PG
- 8.Hoods&Housings seal: NBR
- 9.Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm	0.1/10
Over 6 To 10	Over 30 To 60	0.1/10
Over 10 To 24	Over 60 To 100	0.1/10
Over 24 To 35	Over 100 To 150	0.1/10
±0.15	±0.30	±2°

HOW TO ORDER:

S16B-BM-1L.M

- Locking lever — 1L: 1 levers(plastic) 2B: 2 bolts
2L: 2 levers(plastic) 4B: 4 bolts
1L.M: 1 levers(Metal)
2L.M: 2 levers(Metal)
- Housing type — SE: Side entry
SEH: Side entry-high construction
TE: Top entry
TEH: Top entry-high construction
BM: Bulkhead mounted
SM: Sueface mounted
SMH: Sueface mounted-high construction
CC: Cable to cable
CCH: Cable to cable high construction
- Sereies — S3A: 3A Compact type
S10A: 10A Compact type
S16A: 16A Compact type
S32A: 32A Compact type
S6B: 6B Standard type
S10B: 10B Standard type
S16B: 16B Standard type
S24B: S24B Standard type
S32B: S32B Standard type
S48B: S48B Standard type

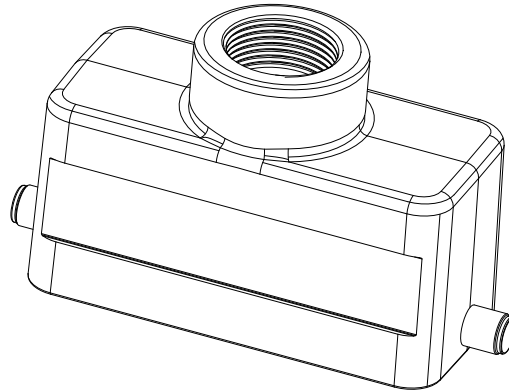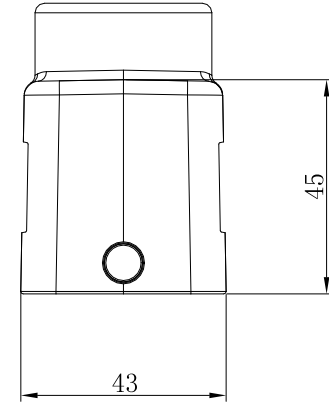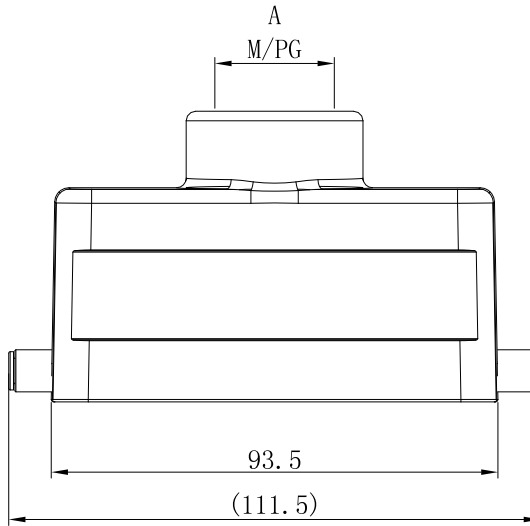

Order number	A
S16B-TE-2B-M25	M25×1.5
S16B-TE-2B-M32	M32×1.5
S16B-TE-2B-PG21	PG21

订货号 Order No.	S16B-TE-2B-XXX	名称 Name	S16B顶出线双耳上壳	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	Tolerances Table	VDI21
设计 Design	CHH	2024.07.17	/	版本号 Revision Number	重量 Weight
审核 Check	CHH	2024.07.17	/	M0	比例 Scale
工艺 Process	-	-	/	第1页/共1页 1 of 1	mm
标准化 Unify	-	-	...	SUPU 宁波雷普电子有限公司	
批准 Approve	XJ	2024.07.17	/	NINGBO SUPU ELECTRONICS CO.,LTD.	

借通用件登记
Common Part

原图号
Old Draw. No.

底图总号
Assembly No.

1

2

3

4

5

6

7

8