

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

General information:

- 1.Material: Aluminium die-cast
- 2.Colour: Grey
- 3.Surface: Powder-coated
- 4.Operating temperature: -40°C~+125°C
- 5.Degree of protection acc.to DIN EN60529 for coupled connector: IP65
- 6.Outgoing direction: Bottom entry
- 7.Locking element:
 - Locking type: Double locking latch
 - Material: metal galvanized/nickel plating
- 8.Hoods&Housings seal: NBR
- 9.Undimensioned Tolerances:





HOW TO ORDER:

S32A-BM-2L.M

└─ Locking lever ─┐ 1L: 1 levers(plastic) 2B: 2 bolts
 └─ 2L: 2 levers(plastic) 4B: 4 bolts
 └─ 1L.M: 1 levers(Metal)
 └─ 2L.M: 2 levers(Metal)

—Housing type — SE: Side entry
SEH: Side entry—high construction
TE: Top entry
TEH: Top entry—high construction
BM: Bulkhead mounted
SM: Suface mounted
SMH: Suface mounted—high construction
CC: Cable to cable
CCH: Cable to cable high construction

es — S3A: 3A Compact type	S6B: 6B Standard type
S10A: 10A Compact type	S10B: 10B Standard type
S16A: 16A Compact type	S16B: 16B Standard type
S32A: 32A Compact type	S24B: S24B Standard type
	S32B: S32B Standard type
	S48B: S48B Standard type

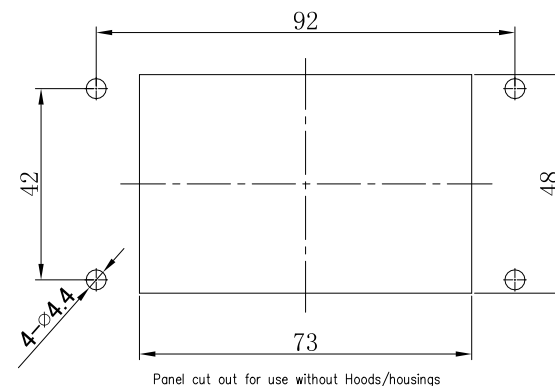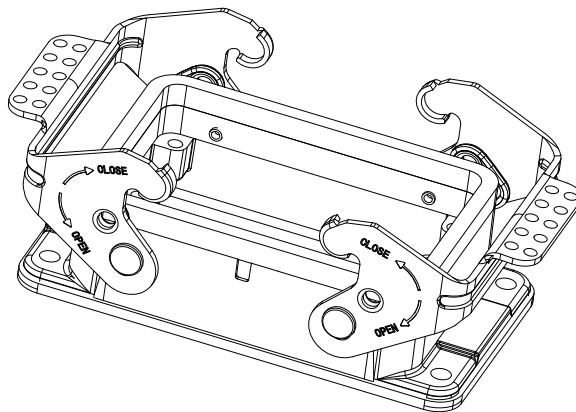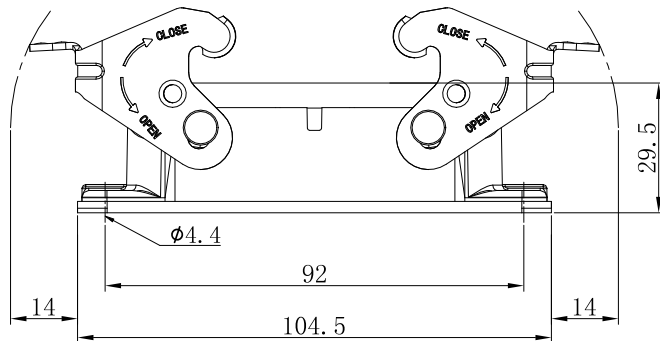

SUPU 宁波盛普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD
