

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD

REV	CN	DESCRIPTION	DRFT	DATE

General information:

- 1.Material:Aluminium die-cast
- 2.Materia, coverl: PC
- 3.Colour: Grey
- 4.Surface:Powder-coated
- 5.Operating temperature: -40°C~+125°C
- 6.Degree of protection acc.to DIN EN60529 for coupled connector:IP65
- 7.Outgoing direction:Bottom entry
- 8.Hoods&Housings seal:NBR
- 9.Undimensioned Tolerances:

Pitch Range in mm		Nominal Dimension Range in mm		
Over 6	Over 10	Over 30	Over 60	Over 100
To 8	To 10	To 24	To 30	To 60
±0.15	±0.20	±0.30	±0.50	±0.70
±1.00	±1.30	±2.00	±2.50	±3.00


HOW TO ORDER:

S32A-BM-2L.M

Locking lever — 1L: 1 levers(plastic) 2B: 2 bolts
2L: 2 levers(plastic) 4B: 4 bolts
1L.M: 1 levers(Metal)
2L.M: 2 levers(Metal)

Housing type — SE: Side entry
SEH: Side entry-high construction
TE: Top entry
TEH: Top entry-high construction
BM: Bulkhead mounted
SM: Surface mounted
SMH: Surface mounted-high construction
CC: Cable to cable
CCH: Cable to cable high construction

Serieis — S3A: 3A Compact type S6B: 6B Standard type
S10A: 10A Compact type S10B: 10B Standard type
S16A: 16A Compact type S16B: 16B Standard type
S32A: 32A Compact type S24B: S24B Standard type
S32B: S32B Standard type
S48B: S48B Standard type

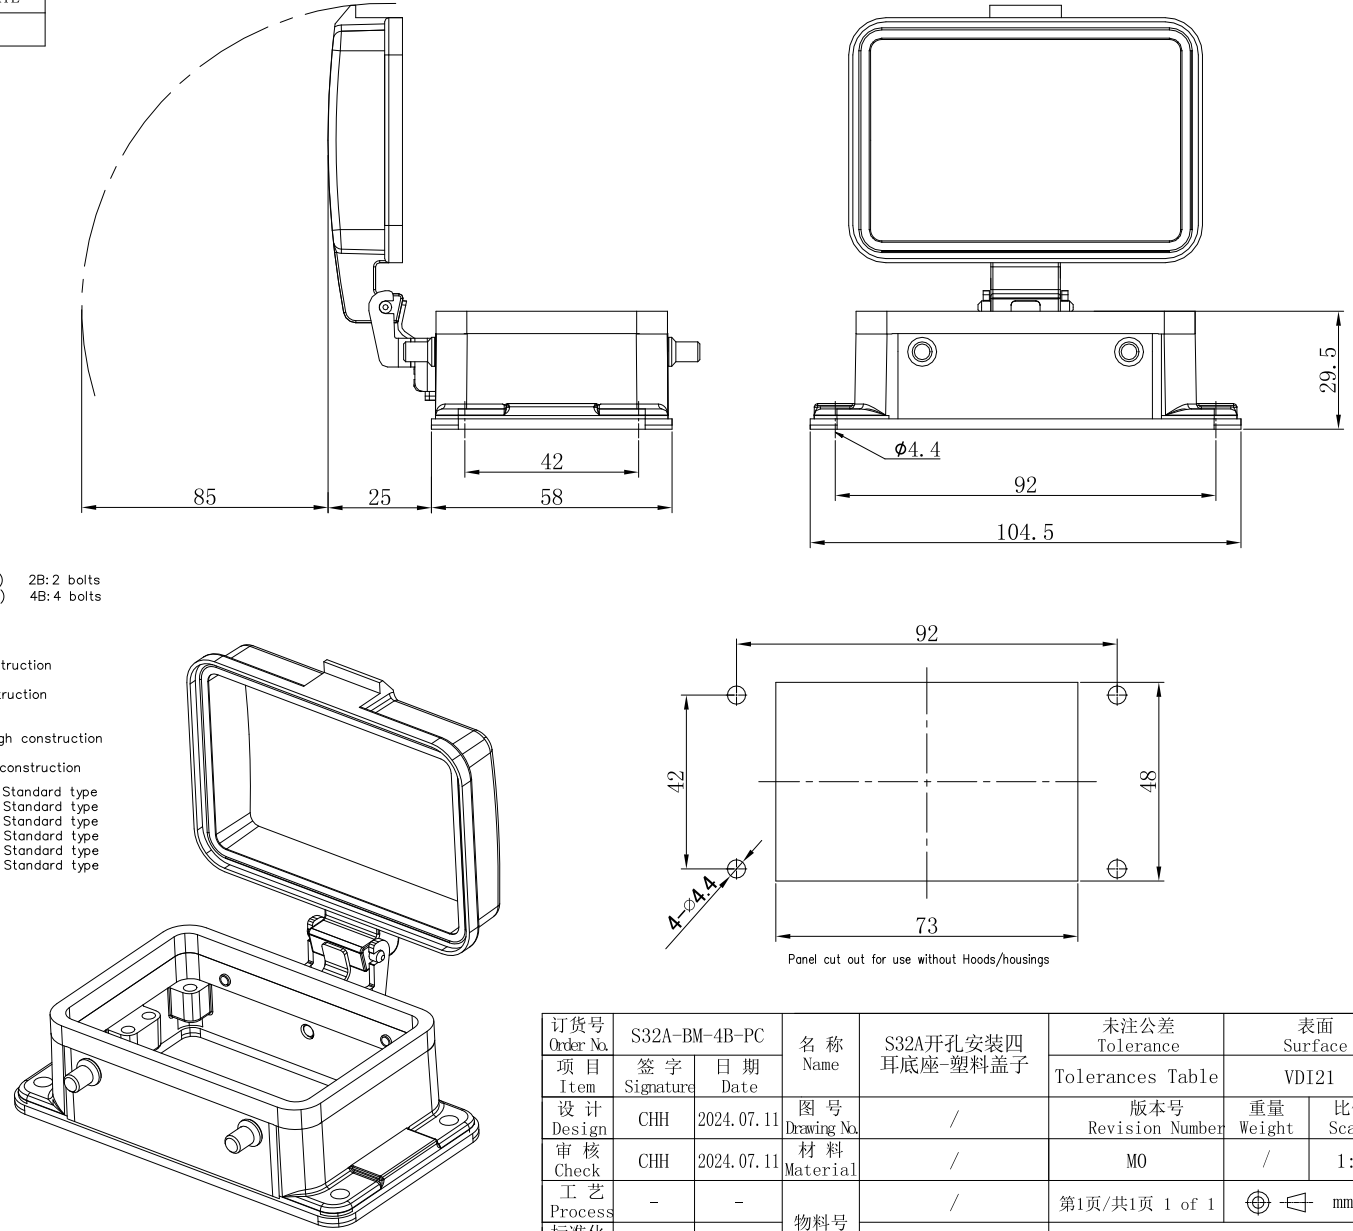

借通用件登记
Common Part

原图号
Old Draw. No.

底图总号
Assembly No.

订 货 号 Order No.	S32A-BM-4B-PC		名 称 Name	S32A开孔安装四 耳底座-塑料盖子	未注公差 Tolerance	表面 Surface		
项 目 Item	签 字 Signature	日 期 Date			Tolerances Table	VDI21		
设 计 Design	CHH	2024.07.11	图 号 Drawing No.	/	版本号 Revision Number	重量 Weight	比例 Scale	
审 核 Check	CHH	2024.07.11	材 料 Material	/	MO	/	1:1	
工 艺 Process	-	-	物料号 Item No.	/	第1页/共1页 1 of 1	⊕ ⊖ mm		
标 准 化 Unify	-	-		...	SUPU 宁波盛普电子有限公司			
批 准 Approve	XJ	2024.07.11		/	NINGBO SUPU ELECTRONICS CO.,LTD.			