


Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

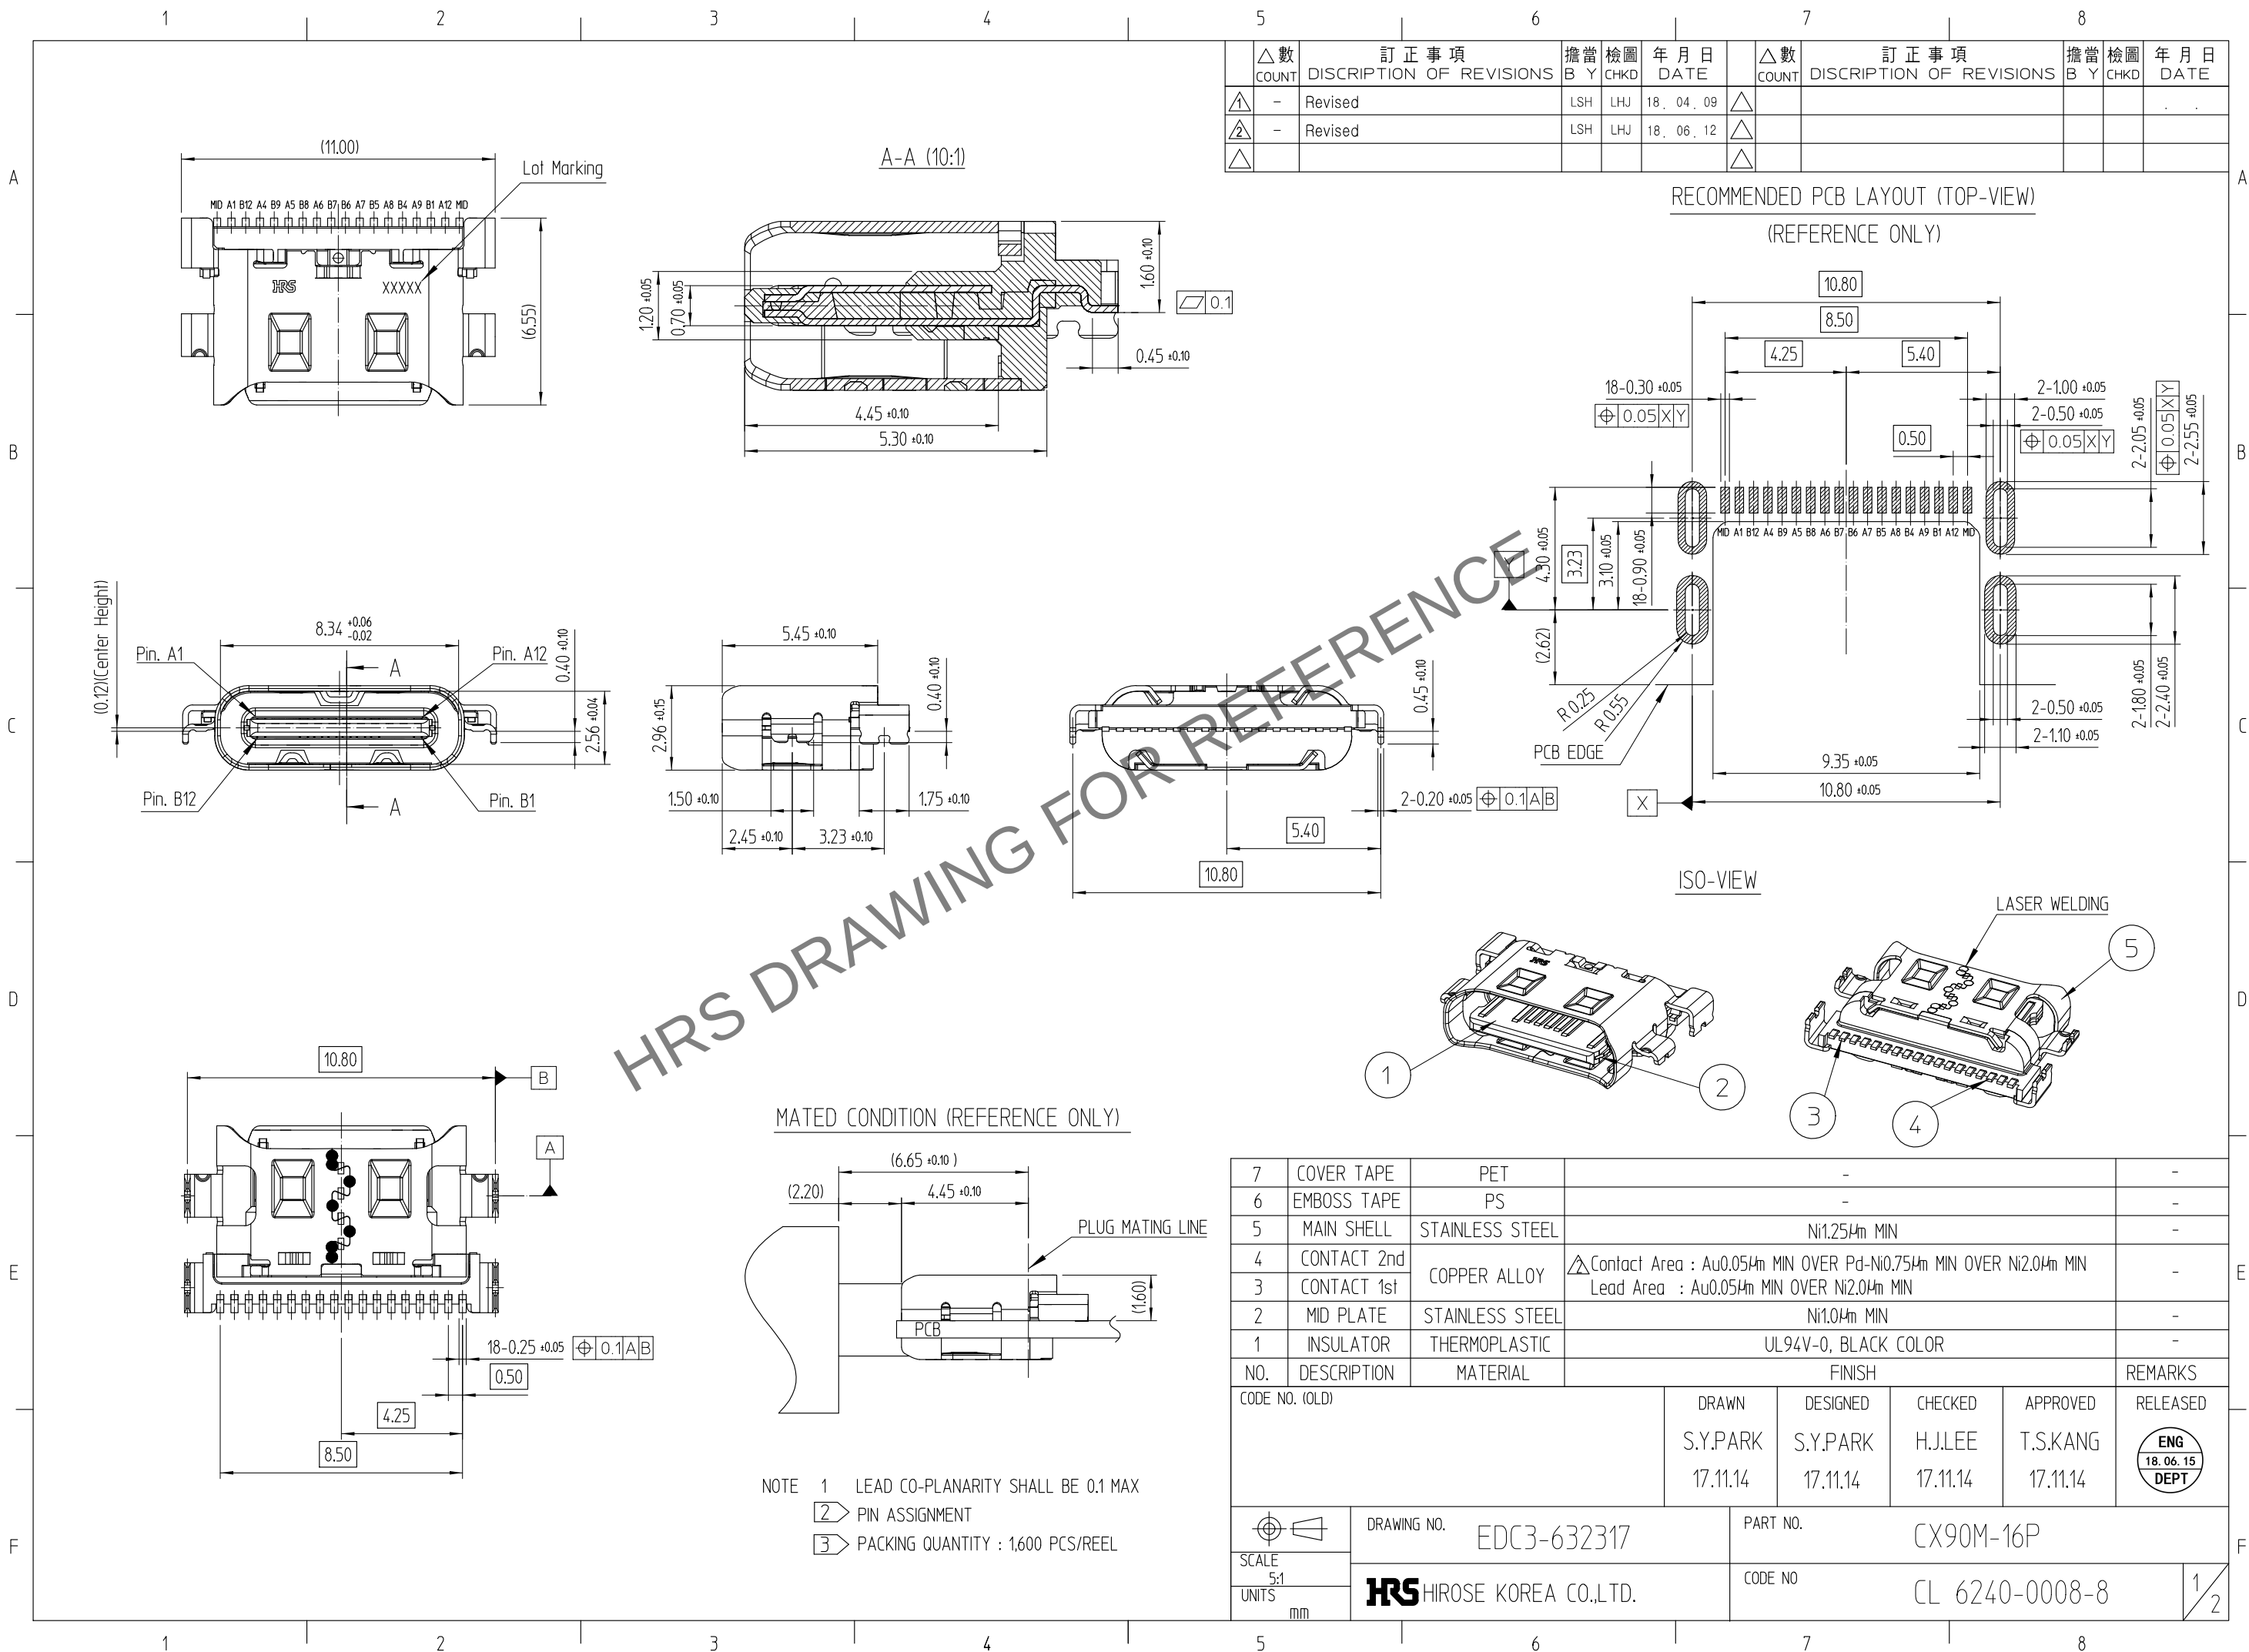

△數 COUNT	訂正事項 DISCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年月日 DATE	△數 COUNT	訂正事項 DISCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年月日 DATE
①	- Revised	LSH	LHJ	18. 04. 09	△				
②	- Revised	LSH	LHJ	18. 06. 12	△				
△					△				

RECOMMENDED PCB LAYOUT (TOP-VIEW)
(REFERENCE ONLY)

MATED CONDITION (REFERENCE ONLY)

- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.1 MAX
② PIN ASSIGNMENT
③ PACKING QUANTITY : 1600 PCS/REEL

7	COVER TAPE	PET					-
6	EMBOSS TAPE	PS					-
5	MAIN SHELL	STAINLESS STEEL	Ni1.25μm MIN				-
4	CONTACT 2nd	COPPER ALLOY	△Contact Area : Au0.05μm MIN OVER Pd-Ni0.75μm MIN OVER Ni2.0μm MIN Lead Area : Au0.05μm MIN OVER Ni2.0μm MIN				-
3	CONTACT 1st						
2	MID PLATE	STAINLESS STEEL	Ni1.0μm MIN				-
1	INSULATOR	THERMOPLASTIC	UL94V-0, BLACK COLOR				-
NO.	DESCRIPTION	MATERIAL	FINISH				REMARKS
CODE NO. (OLD)			DRAWN S.Y.PARK 17.11.14	DESIGNED S.Y.PARK 17.11.14	CHECKED H.J.LEE 17.11.14	APPROVED T.S.KANG 17.11.14	RELEASED ENG 18.06.15 DEPT
		DRAWING NO. EDC3-632317		PART NO. CX90M-16P			1/2
SCALE 5:1		HIROSE KOREA CO.,LTD.		CODE NO CL 6240-0008-8			
UNITS mm							

Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

