

4

3

2

1

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2015

© COPYRIGHT 2000

BY TE CONNECTIVITY



ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER E.O. P19510	18MAY2007	JA	RDR
	E	REVISED PER E.O. P20396	25JUN2010	JA	RDR
	F	REVISED PER ECO-15-007761	28MAY2015	RL	DM
	F1	REVISED PER PCN E-17-014802	06OCT2017	AJ	DM

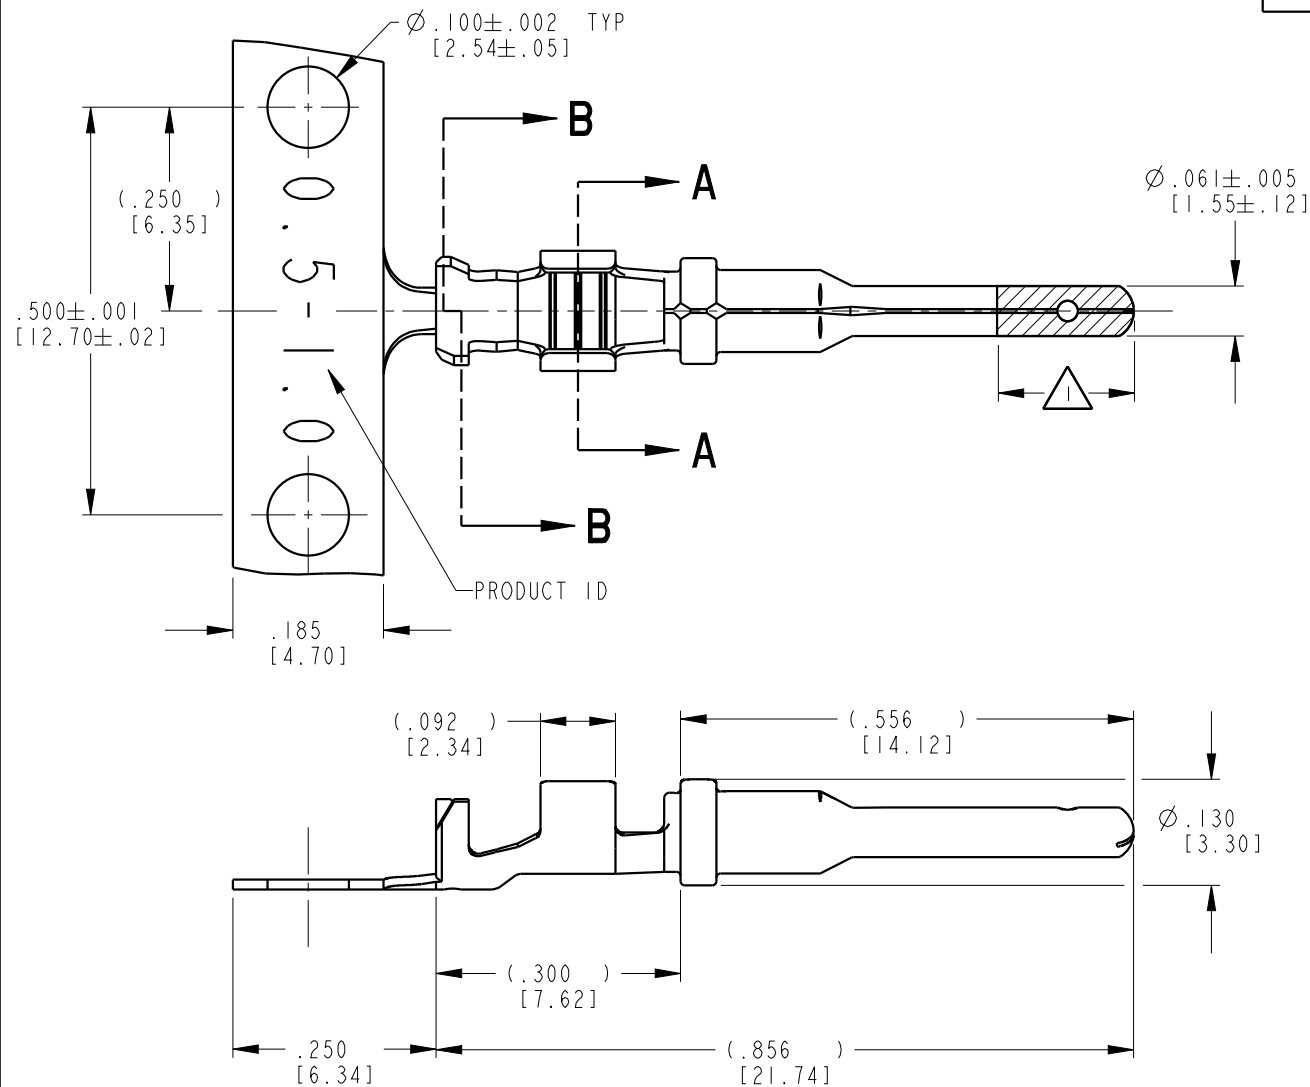

SECTION A-A
WIRE BARREL

SECTION B-B
INSULATION BARREL

TE INTERNAL PN	DEUTSCH PN	PLATING
1060-16-0622	1060-16-0622	NICKEL
1060-16-0644	1060-16-0644	SELECTIVE GOLD
1060-16-0677	1060-16-0677	TIN
1060-16-0688	1060-16-0688	PALLADIUM NICKEL GOLD

3 MATERIAL: .012 [0.30] THICK COPPER ALLOY

2. WIRE RANGE: 20 AWG TO 16 AWG [0.5-1.0 mm²]
INSULATION RANGE: $\varnothing .055$ -.100 [$\varnothing$ 1.40-2.54]

1 APPLIED ONLY TO SELECTIVE GOLD 1060-16-0644.
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC $\pm$ 1 PLC $\pm$ 2 PLC $\pm$ 3 PLC $\pm .025$ [0.64] 4 PLC ANGLES $\pm$
MATERIAL	FINISH
3	SEE TABLE

DWN	28NOV2000
CHK	STEVE PALLUTH
APVD	06DEC2000
PRODUCT SPEC	VLADIMIR TOMSA
APPLICATION SPEC	R. REED
114-151000	
WEIGHT	0.32 g
Customer Drawing	

NAME		STAMPED CONTACT PIN SIZE 16	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C=1060-16-06XX	-
SCALE 6:1		SHEET 1	OF 1
REV F1			