

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:





- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Torque value : M3.5 , 7.02Lb.in
- 3. Wire range : 22~12AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 9.50mm, Poles : N=02~24P
- 3. Withstanding voltage : AC1600V/1Min
- 4. Operating temperature : -40°C~+110°C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		Tolerance
	Over	Under	
6 TO 10	60	100	0.1/10
10 TO 24	30	100	150
±0.15/±0.20/±0.30/±0.50/±0.70/±1.00/±1.30	±0.70/±1.00/±1.30	±2°	

6. RoHS Compliance

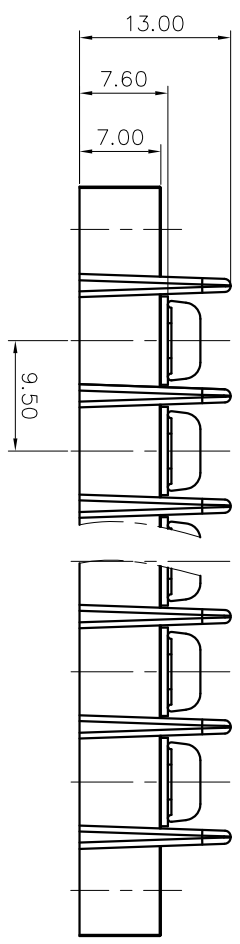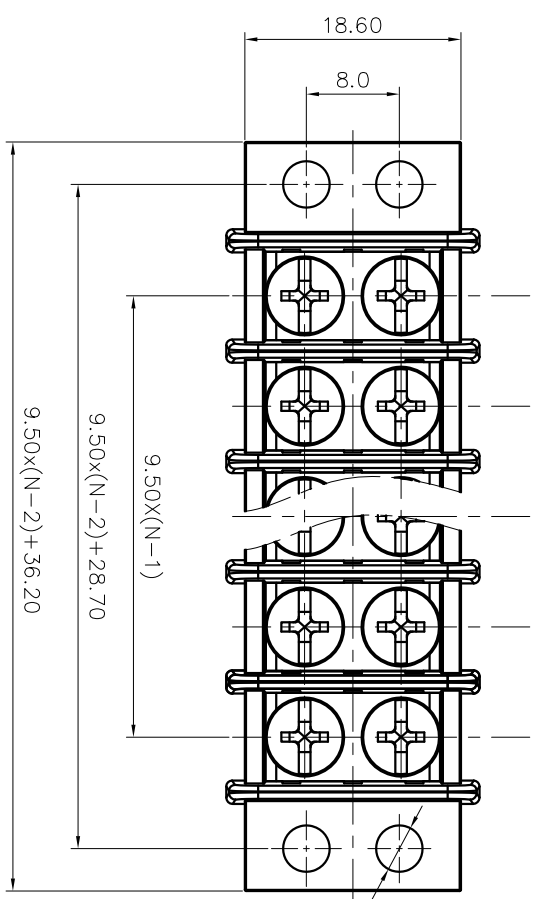

DG49-A - XXP - 1Y - 00A (H)  
 (RoHS)  
 00A - (Standard)  
 (Series No.) (Poles) (Single Pitch) (Color):  
 3. (Black)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1