


Screw clamping terminal block-USK-4N-281050



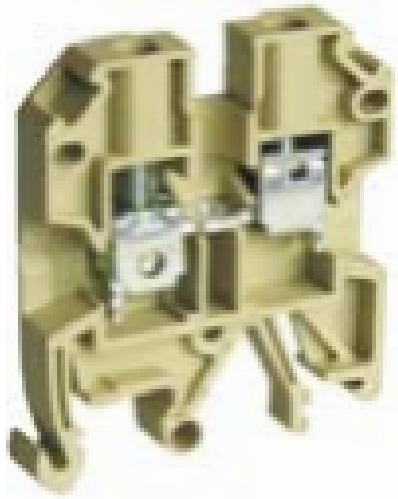

Screw clamping terminal block , rated voltage:800V , Max. operating current:32A, connection method : screw connection , number of connections : 2 , crimping range : 0.5mm² -6mm² ,AWG : 20-10 , thickness:6.5mm , height:46mm , color : Beige , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	100
NW per piece(g)	9.4
Layers	1
Number of connections	2
Rated cross section(mm ²)	6
Color	Beige
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	800
Rated current(A)	32
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	<h1>RoHS</h1>

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	12
Tightening torque	0.5-1.0
Solid conductors(mm ²)	0.5-6
Solid conductors AWG	20-10
Stranded conductors(mm ²)	1.5-4
Stranded conductors AWG	20-10
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	40
Thickness(mm)	6.5
Height(mm)	46