


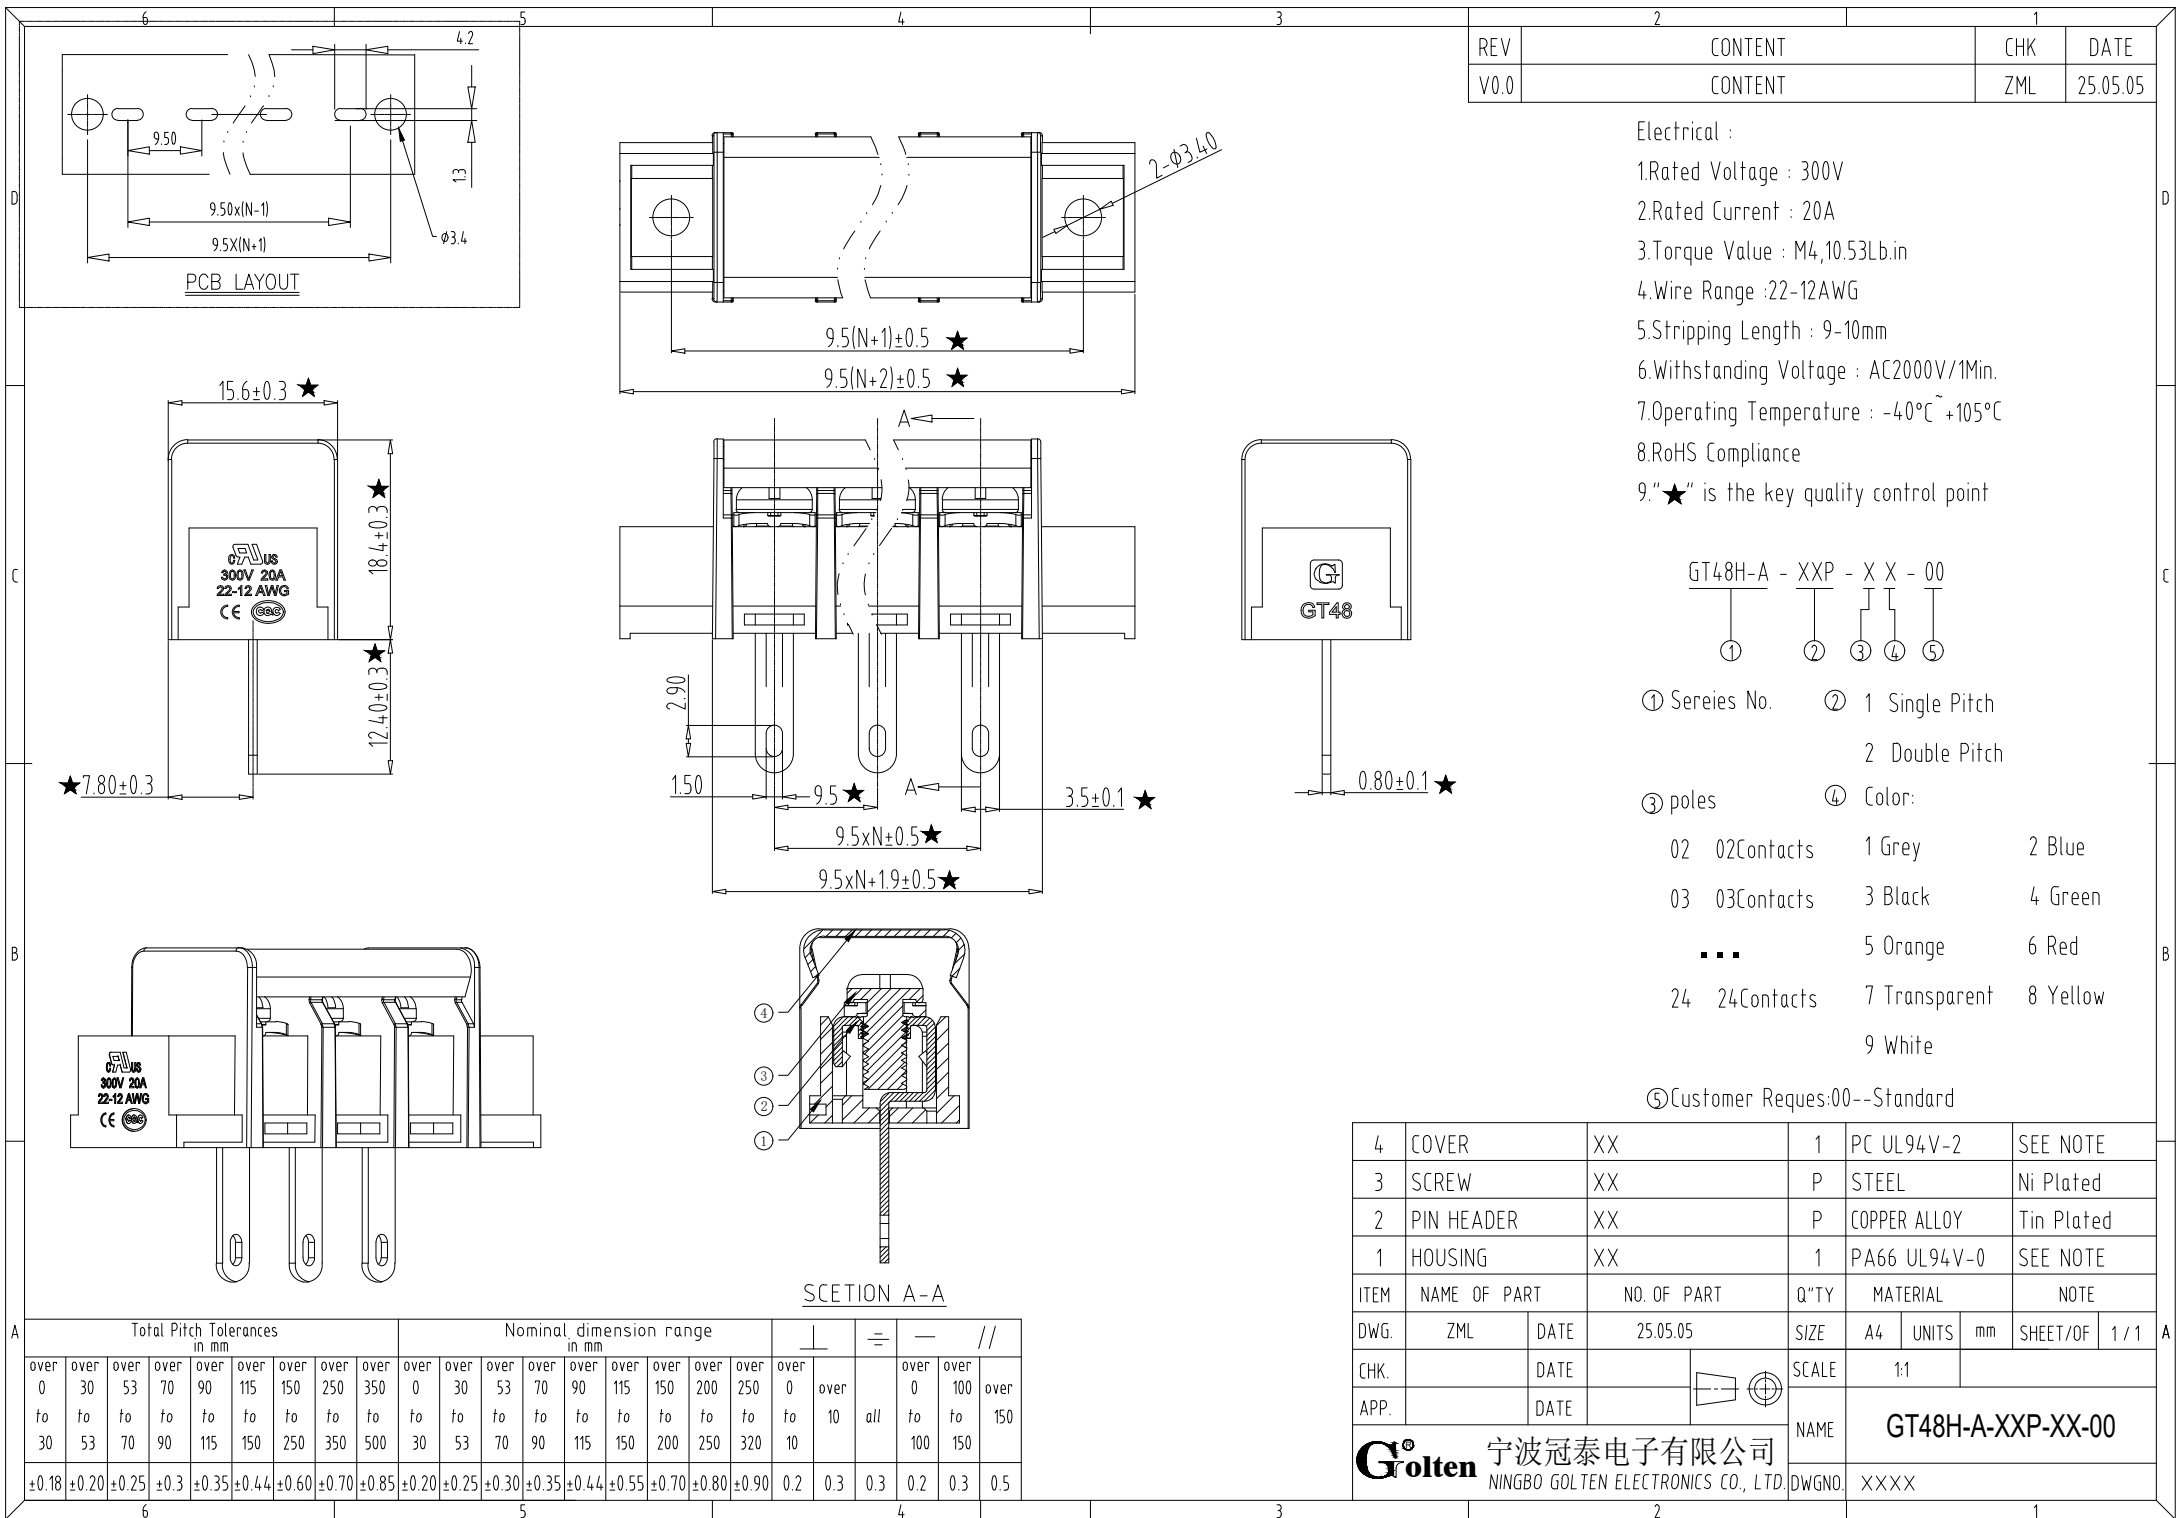

REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZML	25.05.05

- Electrical :
- 1.Rated Voltage : 300V
 - 2.Rated Current : 20A
 - 3.Torque Value : M4,10.53Lb.in
 - 4.Wire Range :22-12AWG
 - 5.Stripping Length : 9-10mm
 - 6.Withstanding Voltage : AC2000V/1Min.
 - 7.Operating Temperature : -40℃~+105℃
 - 8.RoHS Compliance
 - 9."★" is the key quality control point

GT48H-A - XXP - X X - 00				
①	②	③	④	⑤
① Series No.	② 1 Single Pitch			
	2 Double Pitch			
③ poles	④ Color:			
02 02Contacts	1 Grey	2 Blue		
03 03Contacts	3 Black	4 Green		
...	5 Orange	6 Red		
24 24Contacts	7 Transparent	8 Yellow		
	9 White			

⑤Customer Reques:00--Standard

4	COVER		XX		1	PC UL94V-2			SEE NOTE	
3	SCREW		XX		P	STEEL			Ni Plated	
2	PIN HEADER		XX		P	COPPER ALLOY			Tin Plated	
1	HOUSING		XX		1	PA66 UL94V-0			SEE NOTE	
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE	
DWG.	ZML	DATE	25.05.05		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE			SCALE	1:1				
APP.		DATE			NAME	GT48H-A-XXP-XX-00				
宁波冠泰电子有限公司 NINGBO GOLDEN ELECTRONICS CO., LTD.					DWGNO	XXXX				