


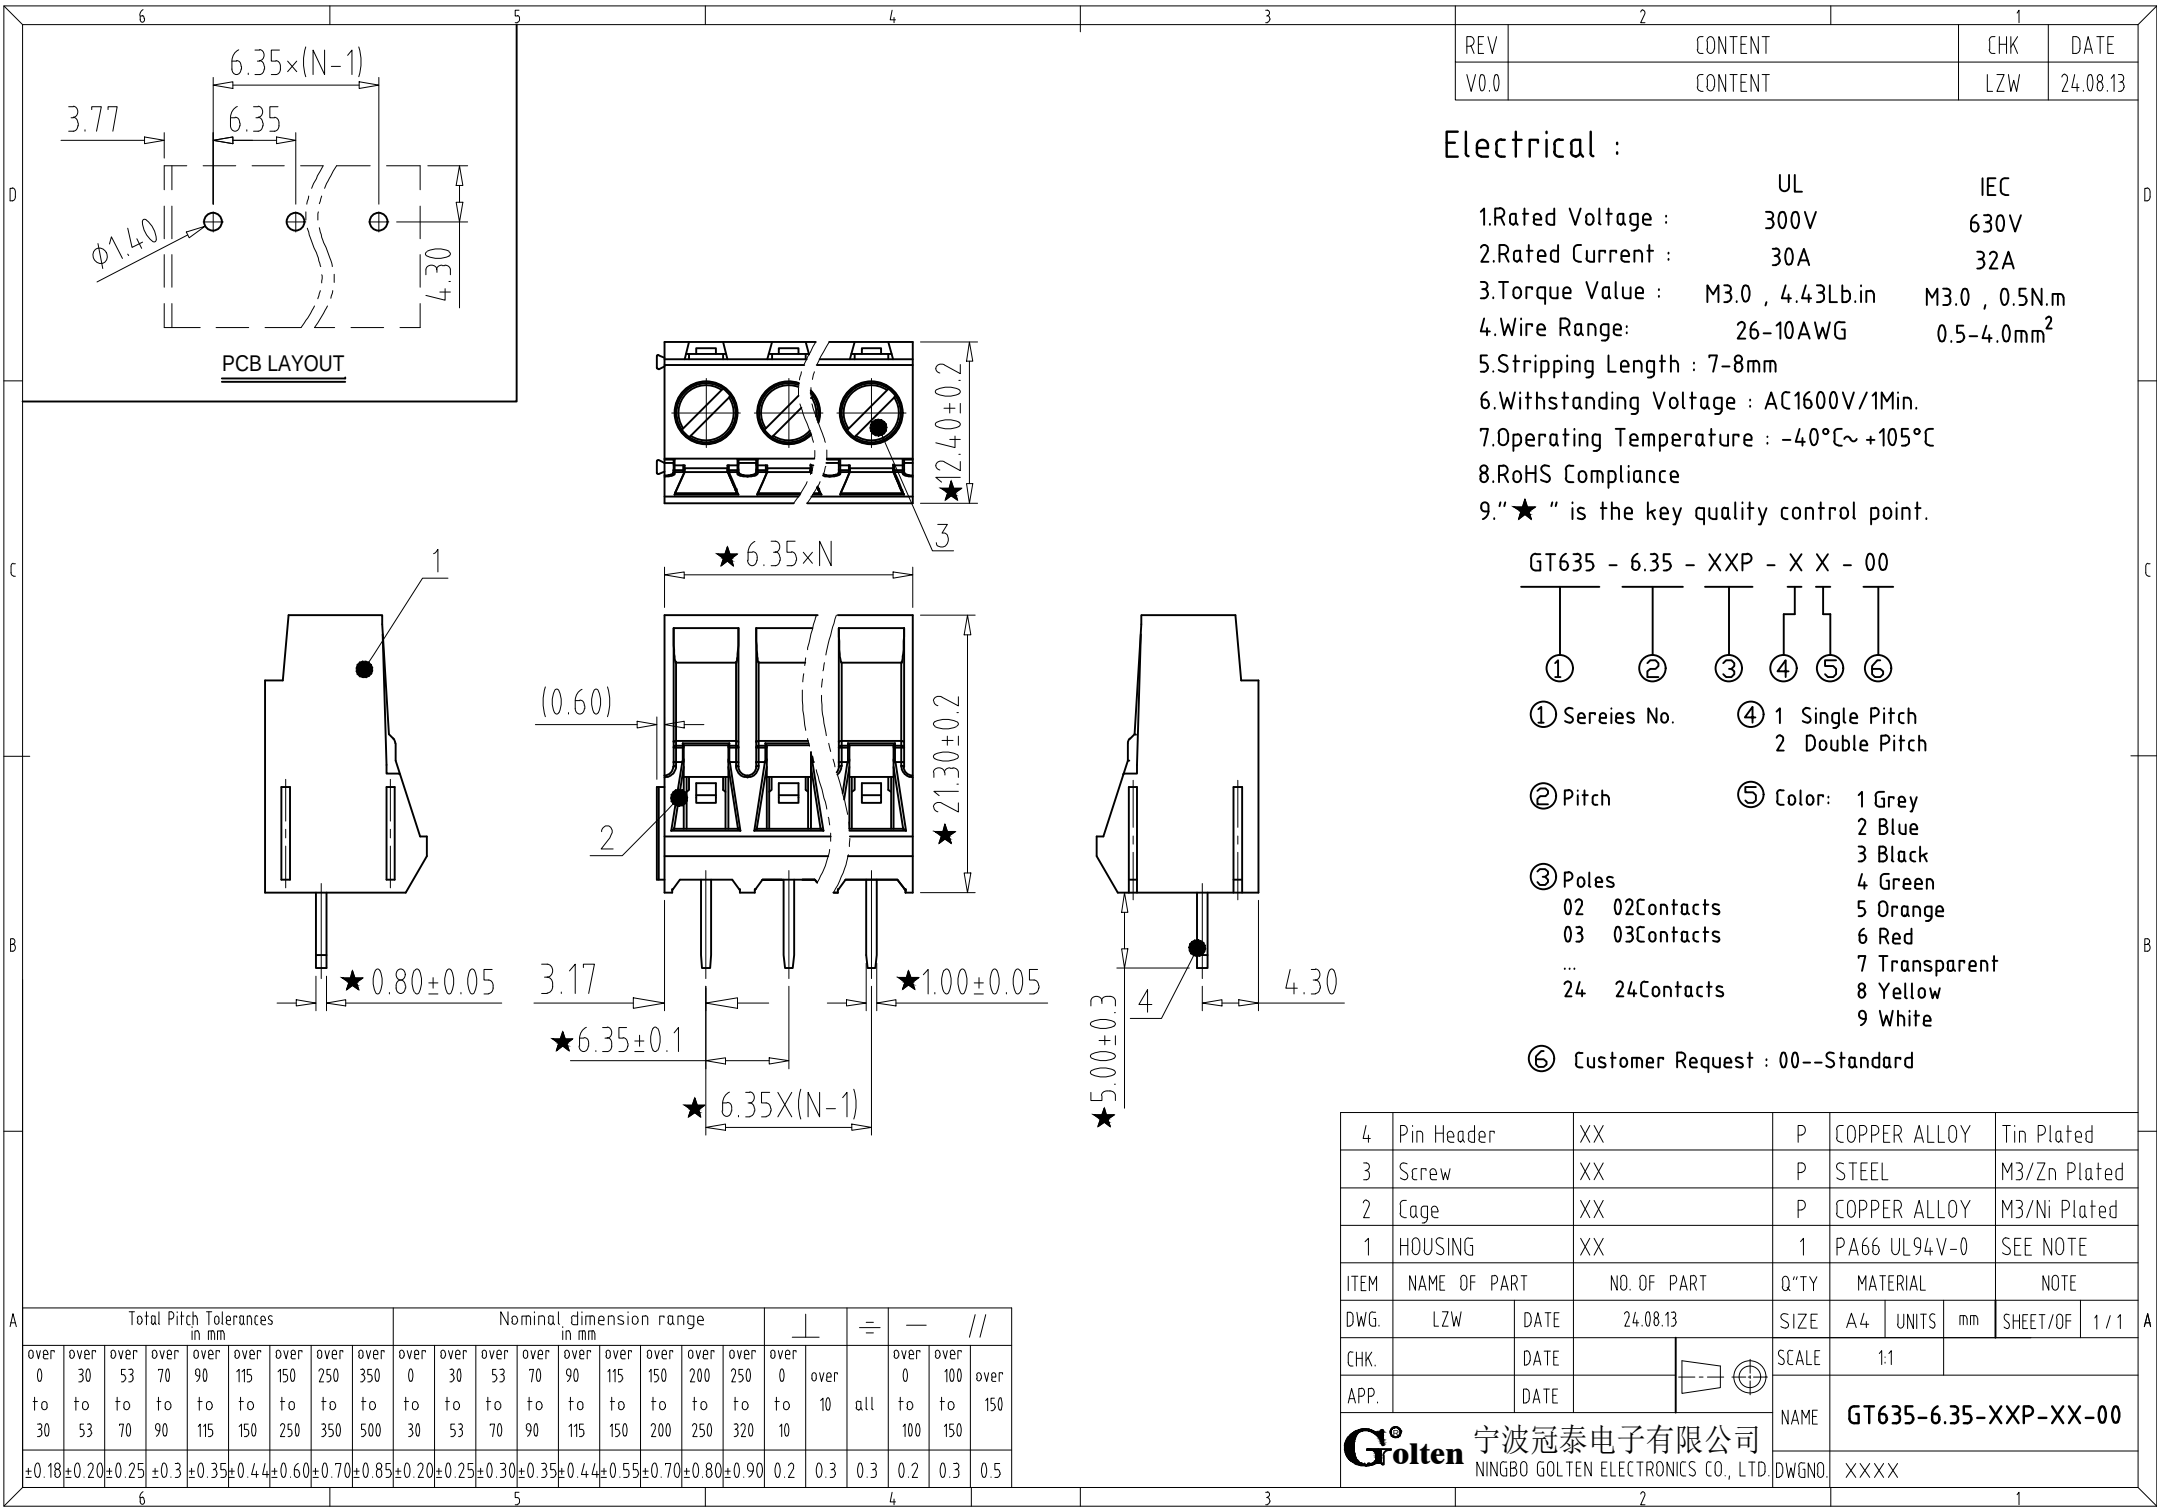

REV	CONTENT	CHK	DATE
V0.0	CONTENT	LZW	24.08.13

Electrical :

- UL

300V

30A

M3.0 , 4.43Lb.in

26-10AWG

7-8mm

AC1600V/1Min.

-40°C~ +105°C

RoHS Compliance

★ " is the key quality control point.
- IEC

630V

32A

M3.0 , 0.5N.m

0.5-4.0mm²
- 1.Rated Voltage :

2.Rated Current :

3.Torque Value :

4.Wire Range:

5.Stripping Length :


6.Withstanding Voltage :

7.Operating Temperature :

8.RoHS Compliance

9.★ " is the key quality control point.

GT635 - 6.35 - XXP - X X - 00



- ① Sereies No.

② Pitch

③ Poles

02 02Contacts

03 03Contacts

... 24 24Contacts
- ④ 1 Single Pitch

2 Double Pitch

⑤ Color:

1 Grey

2 Blue

3 Black

4 Green

5 Orange

6 Red

7 Transparent

8 Yellow

9 White

⑥ Customer Request : 00--Standard

4	Pin Header	XX	P	COPPER ALLOY	Tin Plated
3	Screw	XX	P	STEEL	M3/Zn Plated
2	Cage	XX	P	COPPER ALLOY	M3/Ni Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	24.08.13	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	GT635-6.35-XXP-XX-00
				DWNGD.	XXXX