



# SPECIFICATION FOR PRODUCT

**Part name: DINRAIL FIXED TERMINAL BLOCK**

**Part No.: E/3- XX**

**Customer P/N:**

**Date: 2011-09-23**

## **Seller Confirmation**

|                    |                   |
|--------------------|-------------------|
| <b>Written by</b>  | <b>H.C</b>        |
| <b>Checked by</b>  | <b>Jammy.ling</b> |
| <b>Approved by</b> | <b>Eric</b>       |

## **Customer Confirmation**

|                                   |  |
|-----------------------------------|--|
| <b>Project Audit</b>              |  |
| <b>Structure<br/>Audit</b>        |  |
| <b>Security<br/>Certification</b> |  |
| <b>Quality<br/>Approval</b>       |  |

**Seller: Shanghai Utility Electrical Co., Ltd**

**Add: 1759# Zhongshan Road ,Shanghai**

**Tel: 021-61478435      Fax:021-61478103**

**E-Mail: Marketing@china-utl.com**

|                                            |                        |
|--------------------------------------------|------------------------|
| <b>Customer:</b>                           | <b>Customer P/N:</b>   |
| <b>Seller: Utility Electrical Co., Ltd</b> | <b>Part No: E/3-XX</b> |


### Revision for E/3-XX

| Item No | Edition | Part Revised | Date Revised |
|---------|---------|--------------|--------------|
| 1       | A       | New          | 2011-09-23   |
| 2       |         |              |              |
| 3       |         |              |              |
| 4       |         |              |              |
| 5       |         |              |              |
| 6       |         |              |              |
| 7       |         |              |              |
| 8       |         |              |              |

### 1. TYPE: E/3-XX



## 2. DRAWING&SIZES

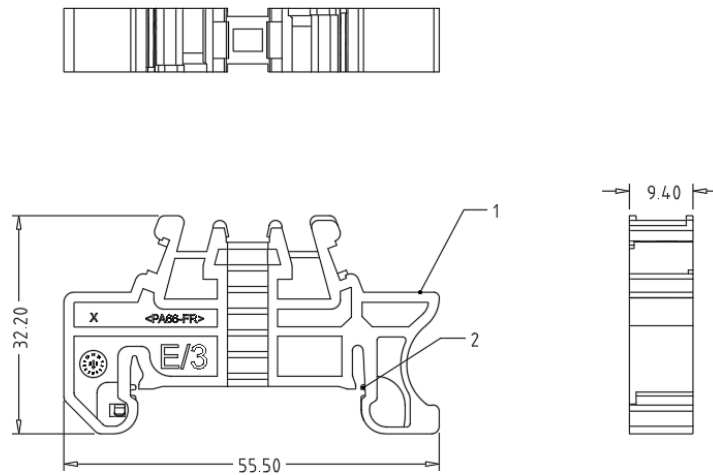

## 3. BOM TABLE

| ITEM. | PART NAME       | MATERIAL       | SURFACE OF CONTACT | QUANTITY (PCS) |
|-------|-----------------|----------------|--------------------|----------------|
| (1)   | Housing         | PA66(UL94 V-0) |                    | 1              |
| (2)   | Accessory parts | SUS301         |                    | 2              |

## 4.WORKING CONDITION :

**OPERATING TEMPERATURE: -40℃～+105℃**

**RELATIVE HUMIDITY: 5%～95%**

## 5. PACKAGE:

**Tightly Sealed**