



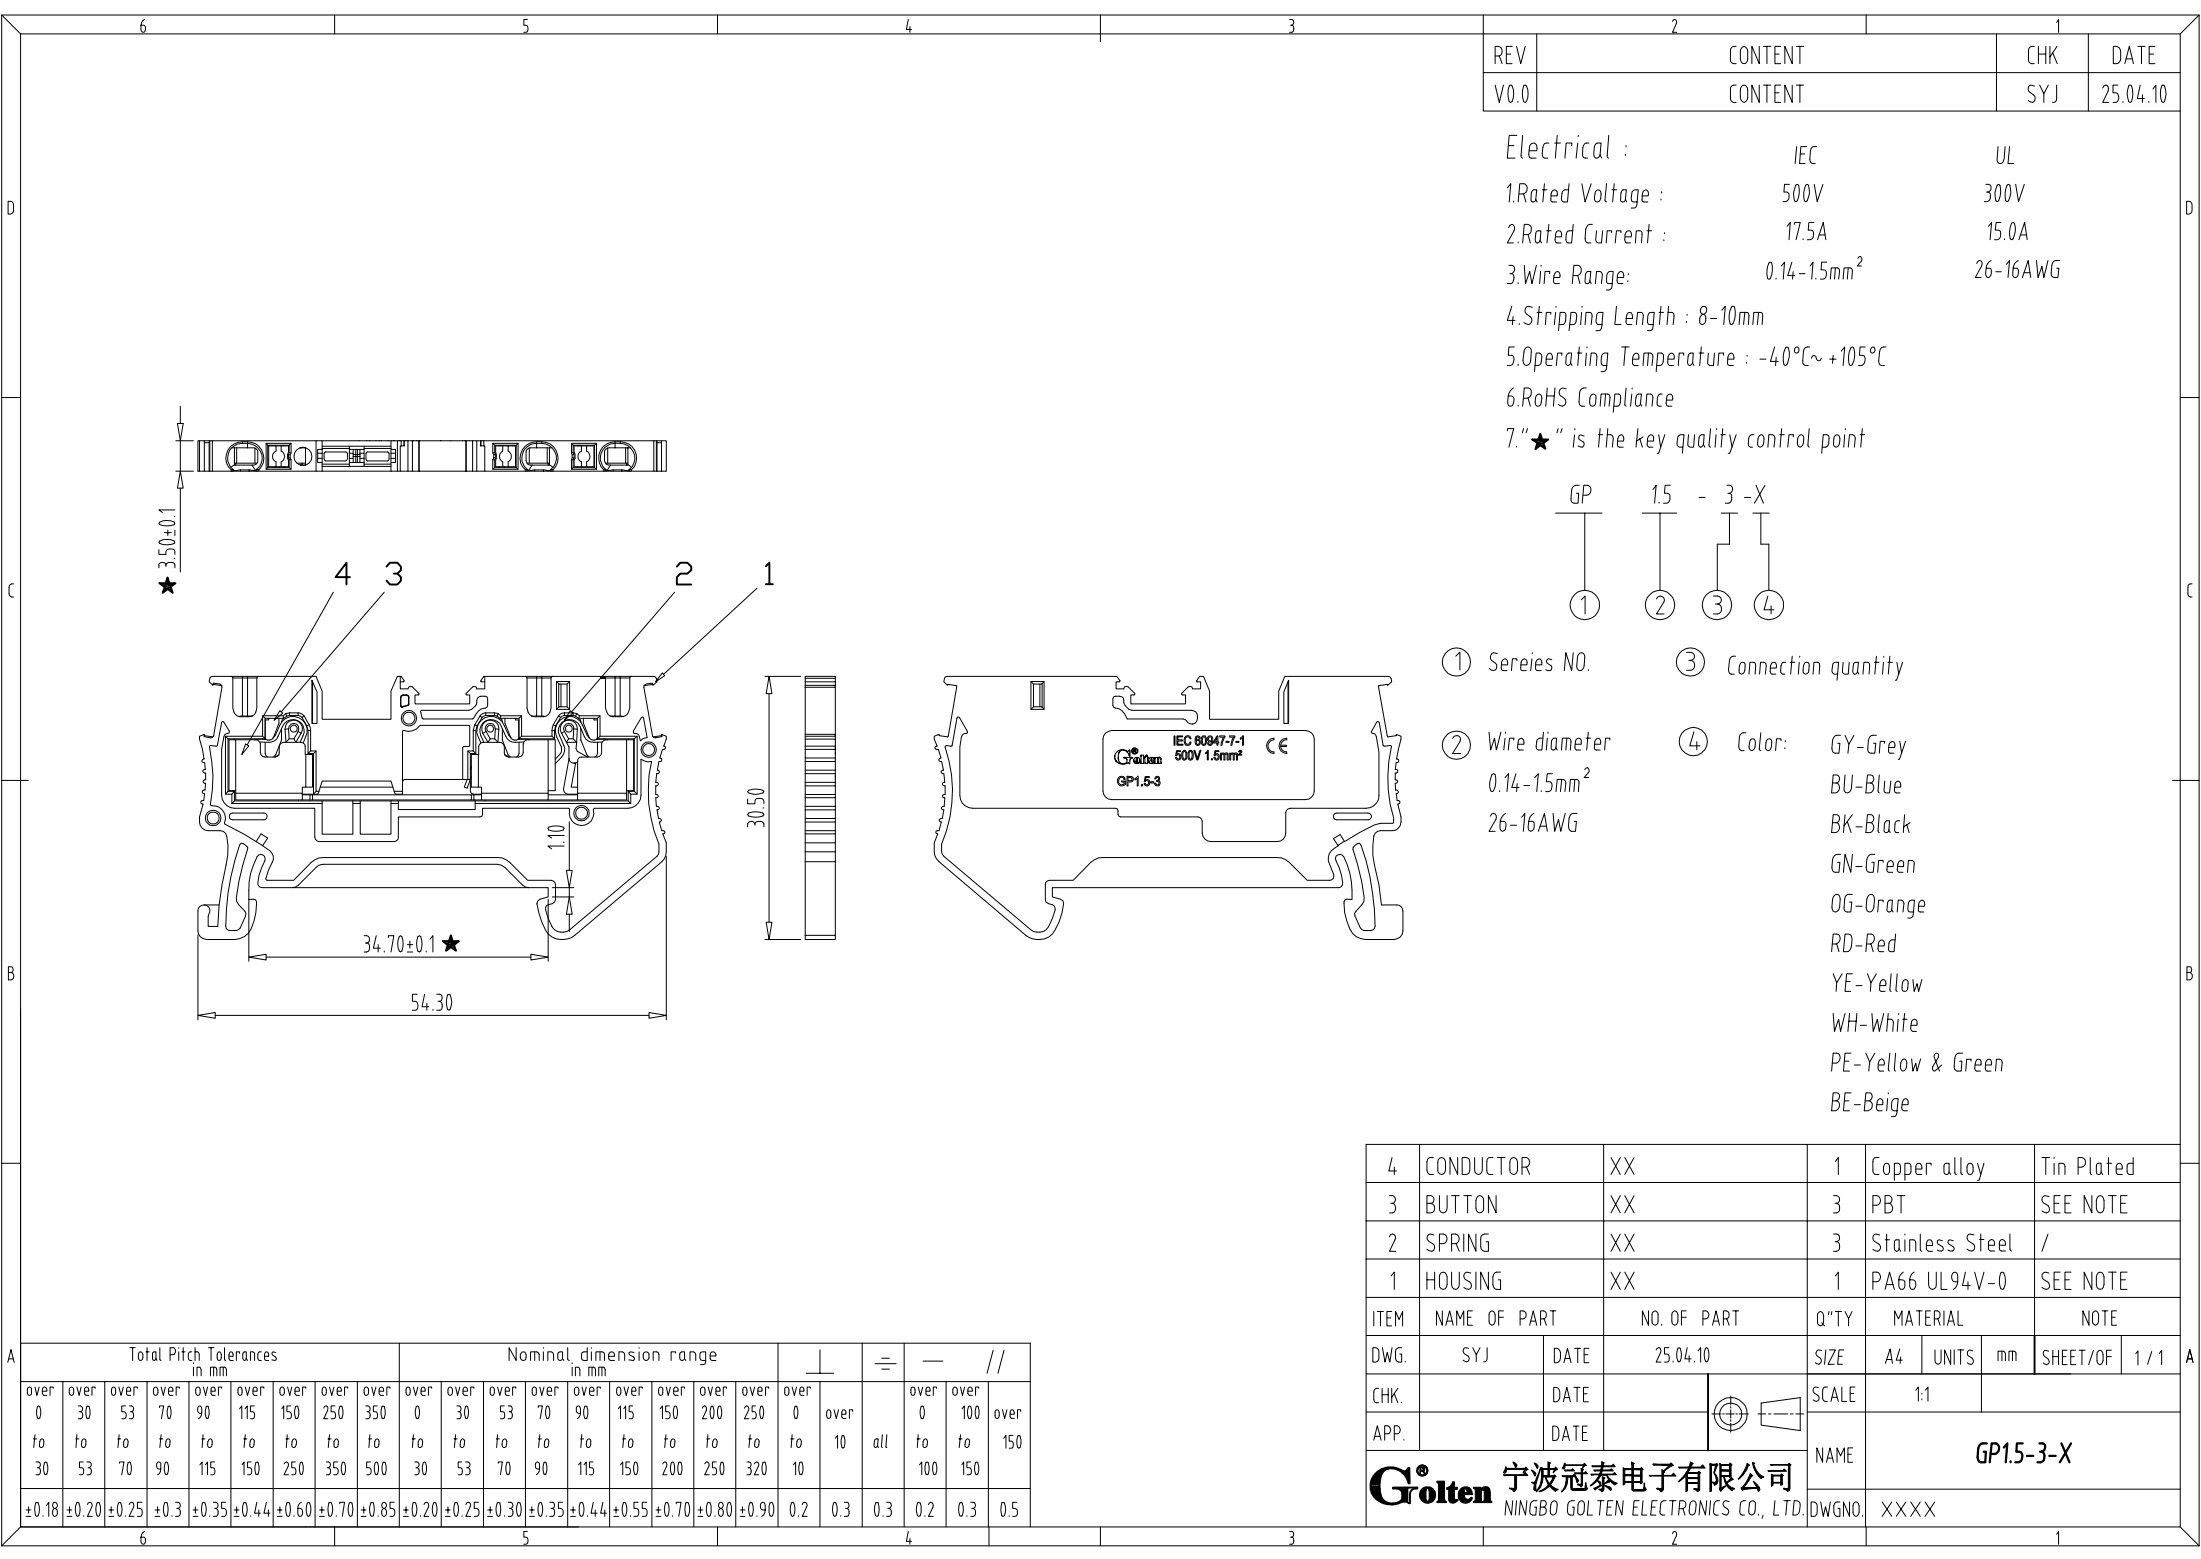

2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.04.10

Electrical :

	IEC	UL
1.Rated Voltage :	500V	300V
2.Rated Current :	17.5A	15.0A
3.Wire Range:	0.14-1.5mm ²	26-16AWG
4.Stripping Length :	8-10mm	
5.Operating Temperature :	-40°C~+105°C	
6.RoHS Compliance		
7."★" is the key quality control point		



- ① Sereies NO.
- ② Wire diameter
0.14-1.5mm²
26-16AWG
- ③ Connection quantity
- ④ Color:
- GY-Grey
 - BU-Blue
 - BK-Black
 - GN-Green
 - OG-Orange
 - RD-Red
 - YE-Yellow
 - WH-White
 - PE-Yellow & Green
 - BE-Beige

4	CONDUCTOR	XX	1	Copper alloy	Tin Plated				
3	BUTTON	XX	3	PBT	SEE NOTE				
2	SPRING	XX	3	Stainless Steel	/				
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE				
ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE		
DWG.	SYJ	DATE	25.04.10	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE			SCALE		1:1		
APP.		DATE							
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				NAME	GP1.5-3-X				
				DWGNO.	XXXXX				

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$ $//$					
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150		
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10		to all	to 100	to 150			
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5		
	6									5									4								

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.