

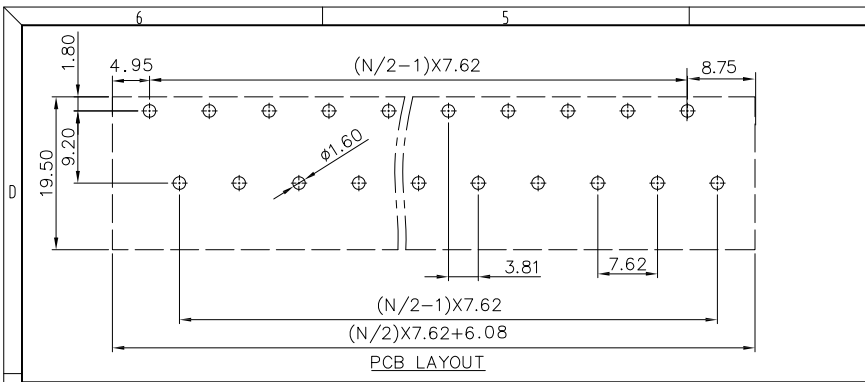
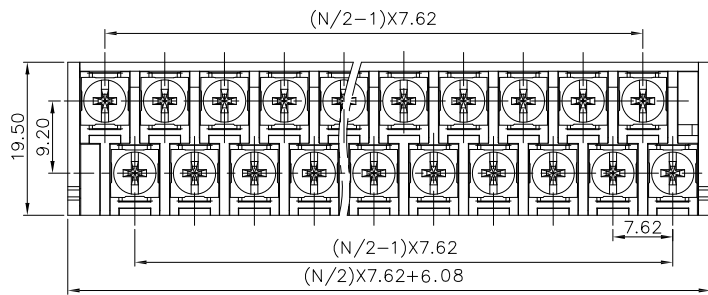



B DIRECTION
(W/O COVER)

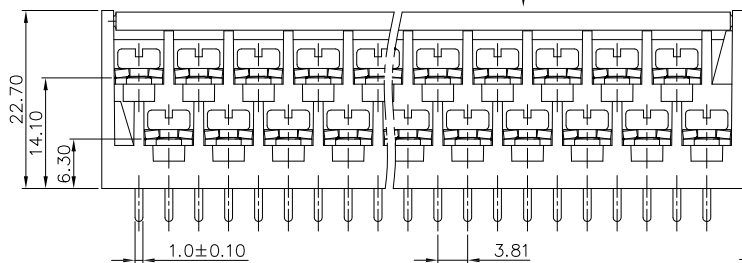

B DIRECTION



REV	CONTENT	CHK	DATE
V0.0	CONTENT	YL	23.05.20

NOTES1:


UL Standard

- 1.Rated Voltage/Current : 300V / 15A
- 2.Torque Value : M3.0 , 4.43Lb.in
- 3.Wire Range : 14~22AWG

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.62mm, Poles : N=6,8,10,12,14, 16,18,20,22,24,26,28,30,32,36,40,44,48P
- 3.Withstanding Voltage : AC1600V/1Min.
- 4.Operating temperature: -40°C~+105°C

GT24-1-B-XXP - X X - 00



- ① Series No.
- ② Poles
- ③ 1 Single Pitch
2 Double Pitch
- ④ Color:
- 1 Grey
 - 2 Blue
 - 3 Black
 - 4 Green
 - 5 Orange
 - 6 Red
 - 7 Transparent
 - 8 Yellow
 - 9 White

⑤ Customer Request: 00--Standard

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$ $//$		
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			to 100	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	YL	DATE	23.05.20	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GT24-1-B-XXP-XX-00
				DWGNO.	XXXX

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.