



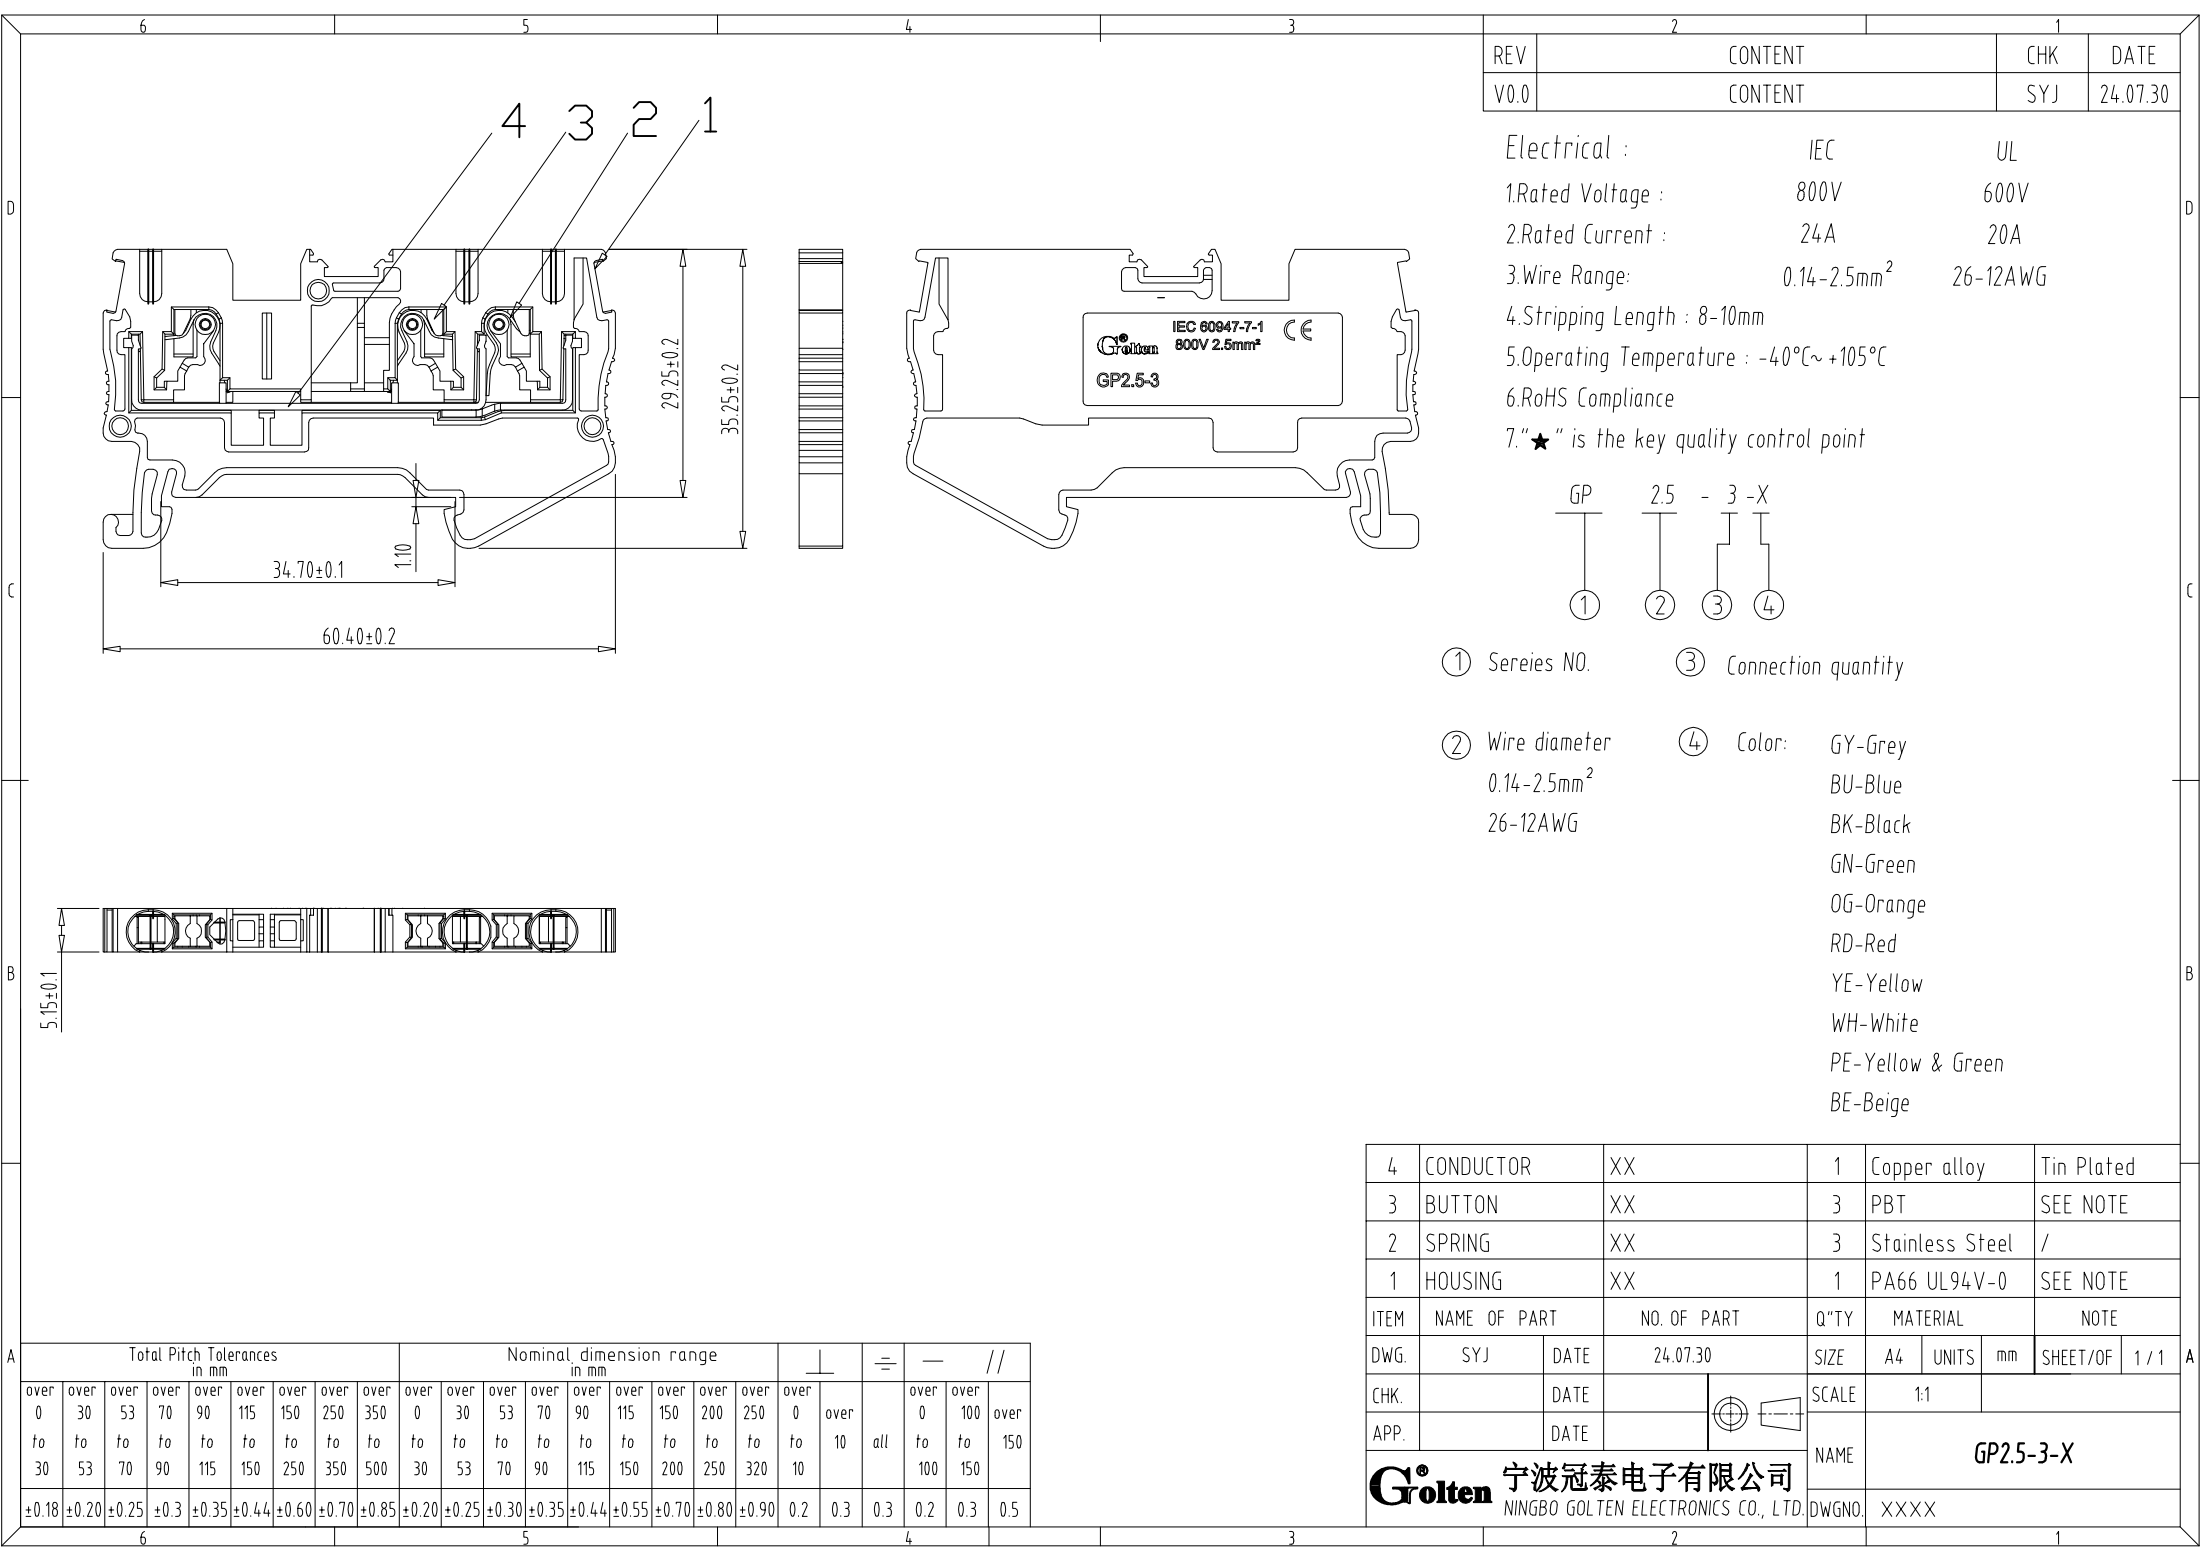

REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	24.07.30

Electrical : IEC UL
1.Rated Voltage : 800V 600V
2.Rated Current : 24A 20A
3.Wire Range: 0.14-2.5mm² 26-12AWG
4.Stripping Length : 8-10mm
5.Operating Temperature : -40°C~+105°C
6.RoHS Compliance
7."★" is the key quality control point



① Series NO. ③ Connection quantity

② Wire diameter 0.14-2.5mm² 26-12AWG
④ Color: GY-Grey
BU-Blue
BK-Black
GN-Green
OG-Orange
RD-Red
YE-Yellow
WH-White
PE-Yellow & Green
BE-Beige

4	CONDUCTOR	XX	1	Copper alloy	Tin Plated
3	BUTTON	XX	3	PBT	SEE NOTE
2	SPRING	XX	3	Stainless Steel	/
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	SYJ	DATE	24.07.30	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GP2.5-3-X
Grolten 宁波冠泰电子有限公司				DWGNO.	XXXX
NINGBO GOLTEN ELECTRONICS CO., LTD.					