











- 4"x2" miniature size
- Universal AC input / Full range
- EMI Class B for both Class I (with FG) and Class II (without FG) configuration
- No load power consumption<0.3W</li>
- High efficiency up to 91%
- · Protections: Short circuit / Overload / Over voltage / Over temperature
- · Cooling by free air convection for 84W and 120W with 10CFM forced air
- Built-in 12V/0.5A fan supply
- LED indicator for power on
- · Operating altitude up to 5000 meters
- 3 years warranty














# Applications

- · Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus

## Description

EPS-120 is a 120W highly reliable green PCB type power supply with a high power density on the 4" by 2" footprint. It accepts 80~264VAC input and offers various output voltages between 12V and 48V. The working efficiency is up to 91% and the extremely low no load power consumption is down below 0.3W. EPS-120 is able to be used for both Class I (with FG) and Class II (no FG) system design. EPS-120 has the complete protection functions; it is complied with the international safety regulations such as TUV EN62368-1, UL62368-1 and IEC62368-1. EPS-120 series serves as a high price-to-performance power supply solution for various industrial applications.

# Model Encoding






## **SPECIFICATION**


MODEL		EPS-120-12	EPS-120-15	EPS-120-24	EPS-120-27	EPS-120-48	
	DC VOLTAGE		12V	15V	24V	27V	48V
	CUDDENT	10CFM	10A	8A	5A	4.5A	2.5A
	CURRENT	Convection	7.0A	5.6A	3.5A	3.15A	1.75A
	RATED	10CFM	120W	120W	120W	121.5W	120W
	POWER	Convection	84W	84W	84W	85W	84W
	RIPPLE & NOISE (max.) Note.2		120mVp-p	120mVp-p	150mVp-p	150mVp-p	200mVp-p
OUTPUT	VOLTAGE ADJ. RANGE		11.4~12.6V	14.3~15.8V	22.8~25.2V	25.6 ~ 28.4V	45.6 ~50.4V
	VOLTAGE TOLERANCE Note.3		±2.0%	±2.5%	±1.0%	±1.0%	±1.0%
	LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	SETUP, RISE TIME		500ms, 30ms/230VAC	500ms, 30ms/115	VAC at full load		
	HOLD UP TIME (Typ.)		50ms/230VAC 10ms/115VAC at full load				
	VOLTAGE RANGE Note.4						
	FREQUENCY RANGE		47 ~ 63Hz				
	EFFICIENCY (Typ.)		88%	88.5%	90%	90%	91%
INPUT	AC CURRENT	Γ (Typ.)	2.1A/115VAC 1.2	2A/230VAC	<u>I</u>		
	INRUSH CURRENT (Typ.)		COLD START 30A/115VAC 60A/230VAC				
	LEAKAGE CURRENT		<0.75mA/240VAC				
			115~150% rated output power				
	OVERLOAD		Protection type: Hiccup mode, recovers automatically after fault condition is removed				
PROTECTION			13.2 ~ 15.6V	16.5 ~ 19.5V	26.4 ~ 31.2V	29.7 ~ 35V	52.8 ~ 62.4V
PROTECTION	OVER VOLTAGE			down o/p voltage, re-po			
	OVER TEMPERATURE		Protection type: Shut down o/p voltage, re-power on to recover				
FUNCTION	FAN SUPPLY		12V@0.5A for driving a fan ; tolerance -15% ~ +10%				
	WORKING TEMP.		-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY		20 ~ 90% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY		-40 ~ +85°C, 10 ~ 95% RH				
ENVIRONMENT	TEMP. COEFFICIENT		±0.03%/°C (0~50°C)				
	OPERATING ALTITUDE Note.6		5000 meters				
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes				
	SAFETY STA	NDARDS	UL62368-1, TUV EN62368-1, IEC62368-1, EAC TP TC 004 approved				
SAFETY &	WITHSTAND	VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC				
EMC	ISOLATION F	RESISTANCE	I/P-O/P, I/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH				
(Note 5)	EMC EMISSION	NC	Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3, EAC TP TC 020				
	EMC IMMUNI	TY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2, heavy industry level, criteria A, EAC			teria A, EAC TP TC 020	
OTHERS	MTBF		653.5Khrs min. MIL-HDBK-217F (25°C)				
	DIMENSION		101.6*50.8*29mm (L*W*H)				
	PACKING		0.15Kg; 72pcs/11.8Kg/0.82CUFT				
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>Derating may be needed under low input voltages. Please check the derating curve for more details.</li> <li>The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</li> <li>The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> </ol>						




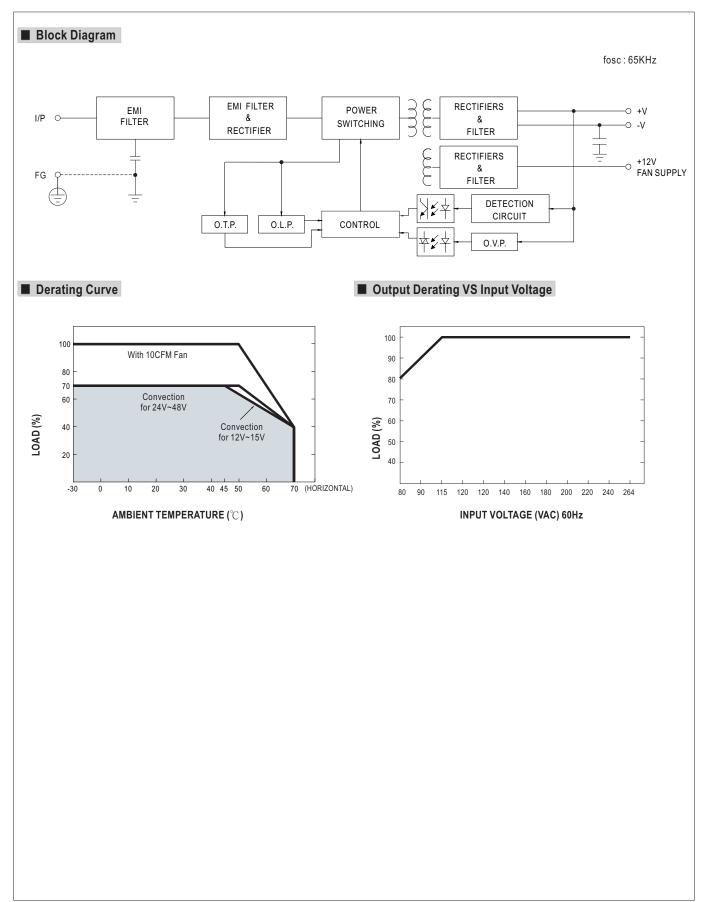

Unit:mm



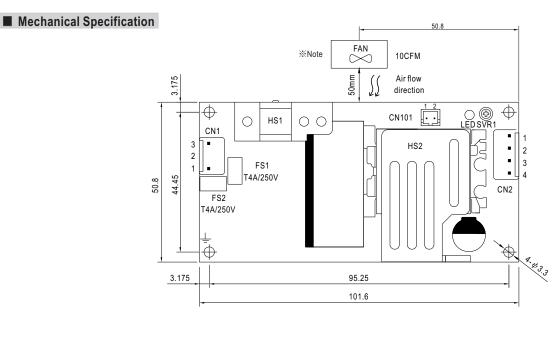



### AC Input Connector (CN1): JST B3P-VH or equivalent

(,				
Pin No.	Assignment	Mating Housing	Terminal	
1	AC/N	IOTAUD	JST SVH-21T-P1.1 or equivalent	
2	No Pin	JST VHR or equivalent		
3	AC/L	or oquiraioni	or oquiruioni	

 $\pm$ : Grounding required

1.HS1,HS2 cannot be shorted.
2.HS1 must have safety isolation distance with system case.

#### DC Output Connector (CN2): JST B4P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2	+V	JST VHR	JST SVH-21T-P1.1
3,4	-V	or equivalent	or equivalent

## FAN Connector(CN101): JST B2B-PH-K-S or equivalent

Pin No.	Assignment	Mating Housing	Terminal	
1	DC COM	JST PHR-2	JST SPH-002T-P0.5S	
2	+12V	or equivalent	or equivalent	

\*\*Note: 1. The FAN SUPPLY is designed to serve as the source of the additive external fan for the cooling of the power supply, enabling the full load delivery and assuring the best life span of the product. Please do not use this FAN SUPPLY to drive other devices.

2.The PCB type(Blank type)model delivers EMI Class B for both conducted emission and radiated emission for the power supply, when configured into either Class I (with FG) or Class  $\,\mathrm{II}\,$  (without FG) system.

#### ■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html