









#### Features

- 250~ 1500Vdc 6:1 ultra-wide input range
- · Withstand 1700Vdc surge input for 10 seconds
- · 85.5mm slim width
- 4KVac I/O high isolation(Reinforced isolation)
- Protections: Short circuit / Overload / Over voltage / Over temperature
   DC input under voltage / DC input reverse polarity
- Fanless design, cooling by free air convection
- · Can be installed on DIN rail TS-35/7.5 or 15
- -40~+80°C ultra-wide operating temperature (>+50°C derating)
- Current sharing up to 960W(3+1)
- Over voltage category II
- Operating altitude up to 5000 meters
- DC OK relay contact
- DC output voltage adjustable(12~15V, 24~29V, 30~36V, 48~58V)
- 3 years warranty

# \* 1











# Applications

- · Photovoltaic power generation
- Renewable Energy System
- High voltage frequency conversion
- Industrial control system
- Semiconductor fabrication equipment
- Electro-mechanical apparatus
- · DC bus centralized application
- Energy storage system(ESS)
- Charging pile
- Third rail

#### **■** GTIN CODE


MW Search: https://www.meanwell.com/serviceGTIN.aspx

# Description

DDRH-240 series is a 250  $^{\sim}$  1500Vdc high reliable ultra-high input DIN rail type DC-DC converter which can supply stable working voltage for the load. It is suitable to be mounted on TS-35/7.5 or 15 rails. Main features are as following: easy to install DIN rail type, narrow width(85.5mm) in slim design, -40 $^{\sim}$ +80 $^{\circ}$ C wide range operating temperature, 4KVac high isolation voltage, current sharing up to 960W(3+1), operation at 5000m altitude, high efficiency, low ripple & noise, complete protections and so on.

DDRH-240 is compliant with BS EN/EN61000-6-2 standard regarding immunity for industrial environments. It is suitable for industrial automation, surveillance, telecommunication and can be widely deployed in the applications of new energy generation such as solar power, and windmill power generation, photovoltaic power systems, high voltage inverting, DC bus centralized application, ESS, charging pile, railway and so for th.



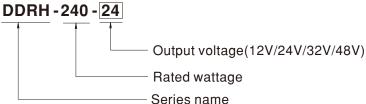




#### **SPECIFICATION**

MODEL			DDRH-240-12	DDRH-240-24	DDRH-240-3	32	DDRH-240-48	
	DC VOLTAGE		12V	24V	32V		48V	
	RATED CURRENT		16.7A	10A	7.5A		5A	
OUTPUT	CURRENT RANGE		0 ~ 16.7A	0 ~ 10A	0 ~ 7.5A		0 ~ 5A	
	RATED POWER		200.4W	240W	240W		240W	
	RIPPLE & NOISE (max.) Note.2		120mVp-p	240mVp-p	240mVp-p		300mVp-p	
	VOLTAGE ADJ. RANGE		12 ~ 15V	24 ~ 29V	30 ~ 36V		48 ~ 58V	
	VOLTAGE TOLERANCE Note.3		•	±1.0%	±1.0%		±1.0%	
	LINE REGULATION		±0.5%	±0.5%	±0.5%		±0.5%	
	LOAD REGULATION		±1.0%	±0.5%	±0.5%		±0.5%	
	EXTERNAL CAPACITANCE LOAD (Max.			5000 μ F	4000 μ F		2000 μ F	
	VOLTAGE RANGE Note.4			3000 μ Ι	4000 μ 1		2000 μ Ι	
	VOLIAGE RANGE	300Vdc	85%	070/	070/		070/	
	EFFICIENCY (Typ.)	800Vdc	88%	87% 90%	87% 90%		90%	
INPUT		1500Vdc		86%	86%		86%	
	INDIISH CHDDENT		COLD START 500A /1500Vd				00 /0	
	INRUSH CURRENT (max.)							
	EXTERNAL INPUT FUSE		4A/1500VDC, required(Please refer to page 5 for more details)					
	INTERNAL INPUT FUSE		2A/1500VDC (optional)					
	01/501 0 : 5		105 ~ 135% rated output power  Protection type: Hiccup mode when output voltage<35%, recovers automatically after condition is removed;					
	OVERLOAD						oved; n 35% ~ 100% rated output voltage	
PROTECTION	OVER VOLTAGE		16.5 ~ 21V	32 ~ 42V	40 ~ 48V		62 ~ 70V	
			Protection type : Shut down o/p	• • •				
	OVER TEMPERATURE		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	DC INPUT		By internal Bridge Diode, no damage, recovers automatically after fault condition removed					
	UNDER VOLTAGE LOCKOUT		Under voltage protection range:200 ~ 230Vdc , Under voltage release range:230 ~ 245Vdc					
FUNCTION	DC OK SIGNAL		Relay contact rating(max.): 30V / 1A resistive					
FUNCTION	CURRENT SHARING		Up to 960W(3+1 units). Please refer to the Function Manual					
	WORKING TEMP.		-40 ~ +80°C (Refer to "Derating Curve")					
	WORKING HUMIDITY		20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY		-40 ~ +80°C, 10 ~ 95% RH non-condensing					
ENVIRONMENT	TEMP. COEFFICIENT		±0.03%°C (0~50°C)					
	VIBRATION		Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting clip: Compliance to IEC60068-2-6					
	OPERATING ALTITUDE Note.5							
	OVER VOLTAGE CATEGORY		OVC II 2000m, According to EN62109-1					
	SAFETY STANDARDS		IEC62109-1, BS EN/EN62109-1, EAC TP TC 004 approved; Design refer to UL1741(By request)					
	WITHSTAND VOLTAGE		I/P-O/P:4KVAC I/P-FG:2KVAC O/P-FG:2KVAC O/P-DC OK:0.5KVAC					
	ISOLATION RESISTANCE		I/P-O/P, 100M Ohms / 500VDC		20 0111010111110			
	IOOLATION REGIOT	ANOL	Parameter	Standard		Test Level / Note		
	EMC EMISSION		Conducted	BS EN/EN55032(CISPI	232)			
						Class A		
SAFETY &			Radiated	BS EN/EN55032(CISPI	٦٥८)	Class A		
EMC	EMC IMMUNITY		BS EN/EN55035, BS EN/EN610			Toot Love Mark		
(Note.7)			Parameter	Standard		Test Level /Note		
			ESD	BS EN/EN61000-4-2			Level 2, 4KV contact, criteria A	
			Radiated Susceptibility	BS EN/EN61000-4-3		Level 3, 10V, criteria A		
			EFT/Burest	BS EN/EN61000-4-4		Level 3, 2KV, criteria A		
			Surge	BS EN/EN61000-4-5		Level 4, 2KV/Vin+ ~ Vin-, 4KV/Vin~FG , criteria A		
			Conducted	BS EN/EN61000-4-6		Level 3, 10V, criteria A		
			Magnetic Field	BS EN/EN61000-4-8		Level 4, 30A, criteria A		
	MTBF		214.2Khrs min. MIL-HDBK-217F (25°C); 1391.8Khrs min. Telcordia TR/SR-332 (Bellcore) (25°C)					
OTHERS	DIMENSION		85.5*125.2*129.2mm (W*H*D)					
	PACKING		0.96Kg; 8pcs/10.3Kg/1.02CUFT					
NOTE	Ripple & noise     Tolerance : incl     Derating may b     The ambient tel     2000m(6500ft).     Installation clea     full power. In c     The power suppl     EMC directives.     (as available on	are measu udes set u e needed mperature rances : 4 ase the ac y is considi For guidan http://www.	isially mentioned are measured at 800Vdc input, rated load and 25°C of ambient temperature.  Jured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 µf & 47 µf parallel capacitor.  Jup tolerance, line regulation and load regulation.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please check the derating curve for more details.  Junder low input voltage. Please refer than of 5°C/1000m with fan models for operating altitude higher than of the voltage is a heat source, 15mm on the left and right side are recommended when loaded permanently with dijacent device is a heat source, 15mm clearance is recommended.  Junder low input voltage. Please refer to "Emiliar side are recommended when loaded permanently with dijacent device is a heat source, 15mm clearance is recommended.  Junder low input voltage. Please refer to "Emiliar side are recommended when loaded permanently with dijacent device is a heat source, 15mm clearance is recommended.  Junder low input voltage. Please refer to "Emiliar side are recommended when loaded permanently with dijacent device is a heat source, 15mm on the left and right side are recommended when loaded permanently with dijacent device is a heat source, 15mm on the left and right side are recommended when loaded permanently with dijacent device is a heat source, 15mm on the left and right side are recommended when loaded permanently with devating of the please refer to "Emiliar side are recommended when loaded permanently with devating of the please refer to "Emiliar side are recommended when loaded permanently with devating of					



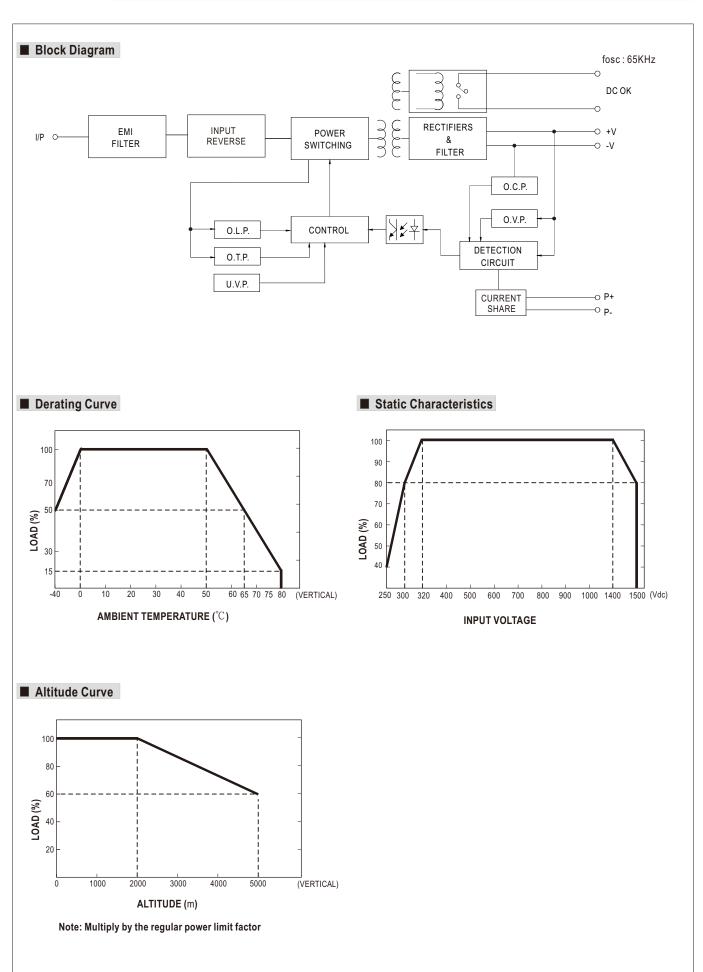




#### ■ DC OK Relay Contact

Contact Close	PSU turns ON / DC OK.	
Contact Open	PSU turns OFF / DC Fail.	
Contact Ratings (max.)	30V/1A resistive load.	

# **■** Function Manual

#### 1. Current sharing

- (1) Parallel operation is available by connecting the units shown as below (P+,P- are connected mutually in parallel) .
- (2) The voltage difference among each output should be minimized that less than 0.2V is required.
- (3) The total output current must not exceed the value determined by the following equation (Output current at parallel operation) =(The rated current per unit) x (Number of unit) x 0.9.
- (4) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (5) When in parallel operation, the minimum output load should be greater than 3% of total output load. (Min. load > 3% rated current per unit x number of unit)
- (6) In parallel operation, after overload or short circuit fault occurs, re-power on to recover.

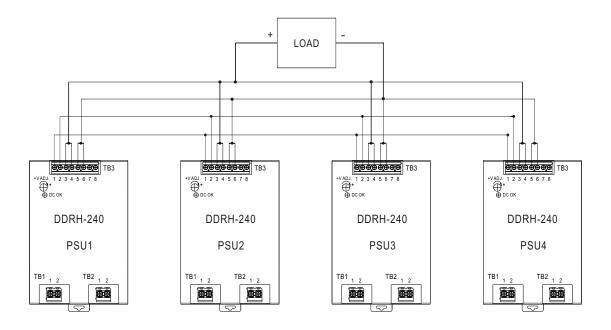





#### ■ Mechanical Specification

Case No.984H Unit:mm

Terminal Pin No. Assignment (TB3)

Pin No.	Assignment
1	P+(Current sharing)
2	P-(Current sharing)
3,4	+Vo
5,6	-Vo
7,8	DC OK Relay Contact

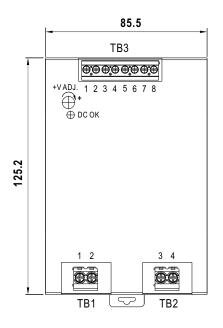

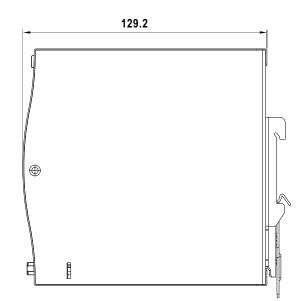


Terminal Pin No. Assignment (TB1,TB2)

Pin No.	Assignment	
1,2	-Vin	
3,4	+Vin	

# ■ External FUSE wiring instruction


External FUSE is required. FUSE specification: 4A/1500Vdc.



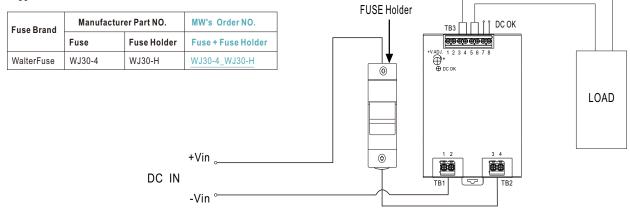



# ■ Installation Instruction

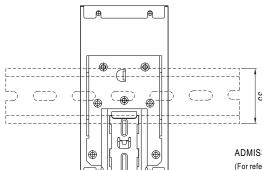

This series fits DIN rail TS35/7.5 or TS35/15. For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN rail:TS35/7.5 OR TS35/15 (For reference only. Not included with unit.)

# ■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html