

function;

③Exceeding the maximum input voltage may cause permanent damage;

④Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit;

⑤The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	24VDC input	3.3V output	--	799/40	818/45	mA
		5V output	--	969/40	993/80	
		Others	--	947/6	969/10	
	48VDC input	3.3V output	--	400/20	409/25	
		5V output	--	485/20	497/60	
		Others	--	474/5	485/9	
Reflected Ripple Current	24VDC input		--	30	--	
	48VDC input		--	30	--	
Surge Voltage (1sec. max.)	24VDC input		-0.7	--	50	VDC
	48VDC input		-0.7	--	100	
Start-up Voltage	24VDC input		--	--	9	
	48VDC input		--	--	18	
Input Under-voltage Protection	24VDC input		5.5	6.5	--	
	48VDC input		12	15.5	--	
Start-up Time	Nominal input & constant resistance load		--	10	--	ms
Input Filter				PI filter		
Ctrl *	Module on			Ctrl pin open or pulled high (3.5-12VDC)		
	Module off			Ctrl pin pulled low to GND (0-1.2VDC)		
	Input current when off		--	4	7	mA
Hot Plug				Unavailable		

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy ^①	0%-100% load		--	± 1	± 3	%
Linear Regulation	Input voltage variation from low to high at full load	Positive Output	--	± 0.2	± 0.5	
		Negative Output	--	± 0.5	± 1	
Load Regulation ^②	5%-100% load	Positive Output	--	± 0.5	± 1	%
		Negative Output	--	± 0.5	± 1.5	
Cross Regulation	Dual output with Positive output at 50% load and Negative output from 10%-100% load		--	--	± 5	
Transient Recovery Time	25% load step change, nominal input voltage		--	300	500	μs
Transient Response Deviation		3.3V/5V/ $\pm 5V$ output	--	± 5	± 8	%
		Others	--	± 3	± 5	
Temperature Coefficient	Full load		--	--	± 0.03	$\%/^{\circ}C$
Ripple & Noise ^③	20MHz bandwidth, 5%-100% load		--	50	100	mV_{p-p}
Trim	Input voltage range		90	--	110	$\%_{Vo}$
Over-voltage Protection			110	--	160	
Over-current Protection			110	--	190	
Short-circuit Protection			Hiccup, continuous, self-recovery			

Note:

①Output voltage accuracy of $\pm 5VDC/\pm 9VDC$ output converter for 0%-5% load is $\pm 5\%$ max;

②Load regulation for 0%-100% load is $\pm 5\%$;

③Under 0% -5% load conditions, ripple & noise does not exceed 5% $_{Vo}$. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC

Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	—	—	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	—	—	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	URB2424LD-20WR3	—	2050	pF
		Others	—	1050	
Operating Temperature	See Fig. 1	-40	—	+85	°C
Storage Temperature		-55	—	+125	
Storage Humidity	Non-condensing	5	—	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	—	—	300	°C
Vibration		IEC/EN61373 - Category 1, Grade B			
Switching Frequency *	PWM mode	—	270	—	kHz
MTBF	MIL-HDBK-217F@25°C	1000	—	—	k hours

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Aluminum alloy		
Dimensions	Horizontal package (without heat sink)		50.80 x 25.40 x 11.80 mm
	Horizontal package (with heat sink)		51.40 x 26.20 x 16.50mm
	A2S chassis mounting (without heat sink)		76.00 x 31.50 x 21.20 mm
	A2S chassis mounting (with heat sink)		76.00 x 31.50 x 25.30 mm
	A4S Din-rail mounting (without heat sink)		76.00 x 31.50 x 25.80 mm
	A4S Din-rail mounting (with heat sink)		76.00 x 31.50 x 29.90 mm
Weight	Without heat sink	Horizontal package/A2S chassis mounting/A4S Din-rail mounting	25.0g/48.0g/68.0g(Typ.)
	With heat sink	Horizontal package/A2S chassis mounting/A4S Din-rail mounting	34.0g/56.0g/76.0g(Typ.)
Cooling Method	Free air convection		

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (without extra components)/ CLASS B (see Fig.3-② for recommended circuit)
	RE	CISPR32/EN55032	CLASS A (without extra components)/ CLASS B (see Fig.3-② for recommended circuit)
Immunity	ESD	IEC/EN61000-4-2	Contact ±4kV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m (without extra components) perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.3-① for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.3-① for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s (without extra components) perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-29	0%, 70% perf. Criteria B

Electromagnetic Compatibility (EMC) (EN50155)

Emissions	CE	EN50121-3-2 EN55016-2-1	150kHz-500kHz 500kHz-30MHz	99dB μ V (see Fig.3-② for recommended circuit) 93dB μ V (see Fig.3-② for recommended circuit)
	RE	EN50121-3-2 EN55016-2-1	30MHz-230MHz 230MHz-1GHz	40dB μ V/m at 10m (see Fig.3-② for recommended circuit) 47dB μ V/m at 10m (see Fig.3-② for recommended circuit)
Immunity	ESD	EN50121-3-2	Contact ±6kV/Air ±8kV	perf. Criteria A
	RS	EN50121-3-2	20V/m (without extra components)	perf. Criteria A
	EFT	EN50121-3-2	±2kV 5/50ns 5kHz (see Fig.3-① for recommended circuit)	perf. Criteria A
	Surge	EN50121-3-2	line to line ±1kV (42Ω, 0.5μF) (see Fig.3-① for recommended circuit)	perf. Criteria A

Typical Characteristic Curves



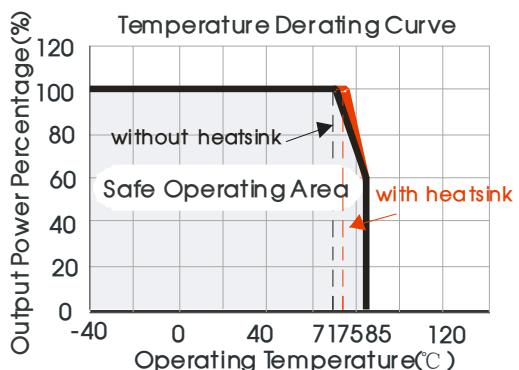


Fig. 1

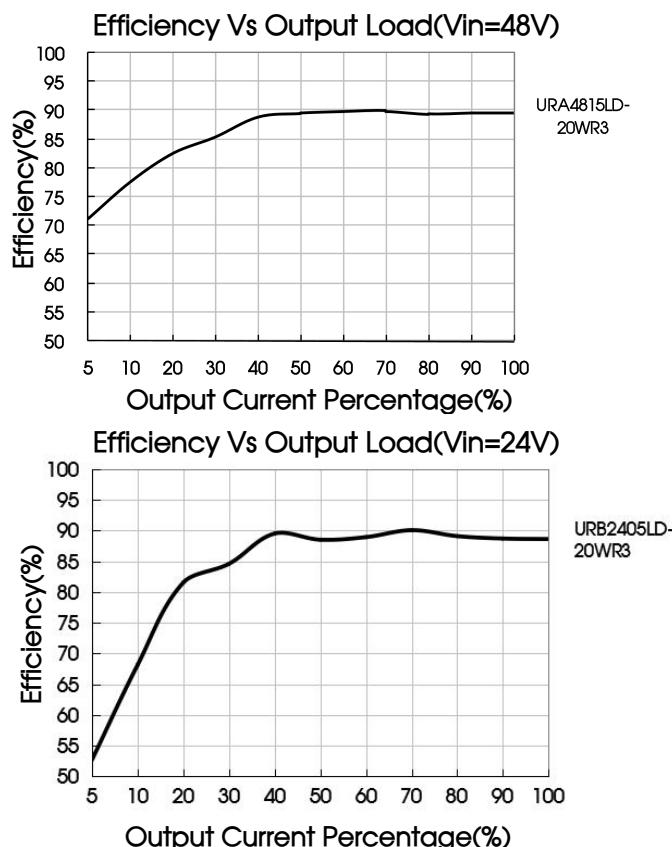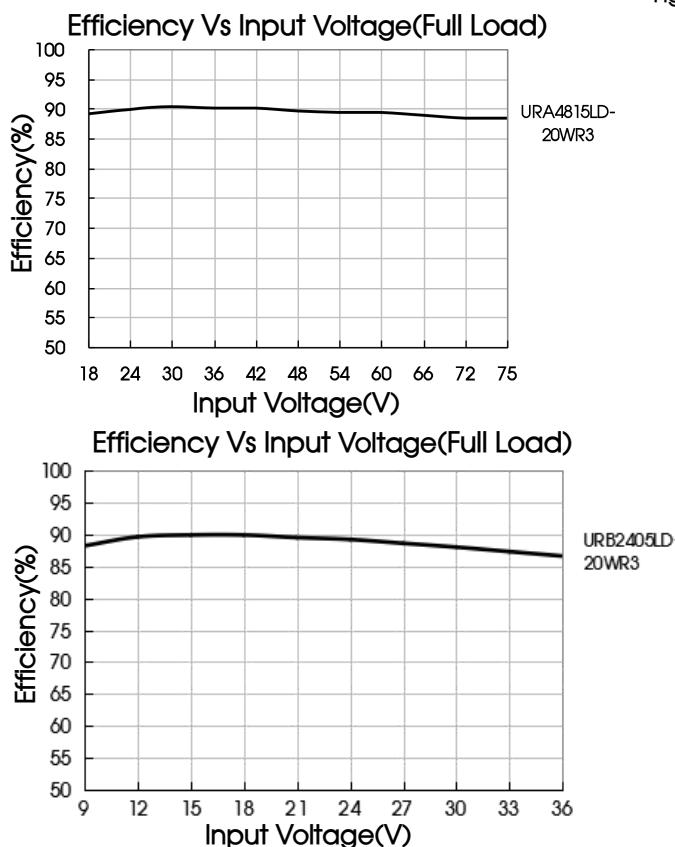


Design Reference

1. Typical application


All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

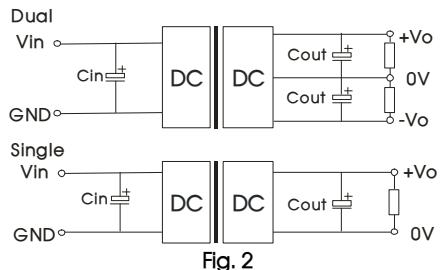


2. EMC compliance circuit

Dual

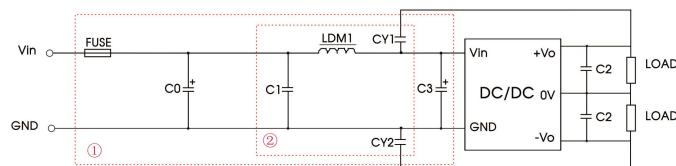

Single

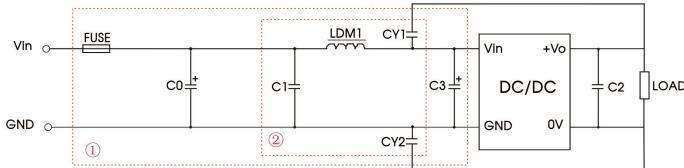

C_{in}	Single V_o (VDC)	C_{out}	Dual V_o (VDC)	C_{out}
Vin: 24VDC 100μF/50V	3.3/5	470μF/16V	±5	220μF/16V
	9	220μF/16V	±9	100μF/16V
	12/15	220μF/25V	±12/±15	100μF/25V
	24	100μF/50V	--	--


Parameter description:

Model	Vin: 24VDC	Vin: 48VDC
FUSE	Choose according to actual input current	
C0/C3	330μF/50V	330μF/100V
C1	1μF/50V	1μF/100V
C2	Refer to the C_{out} in Fig.2	
LDM1	4.7μH/3.1A	
CY1/CY2	1nF/2kV	

Fig. 3

Notes: We use Part ① in Fig. 3 for Immunity tests and Part ② for Emissions test.
Selecting based on needs.

3. Trim Function for Output Voltage Adjustment (open if unused)

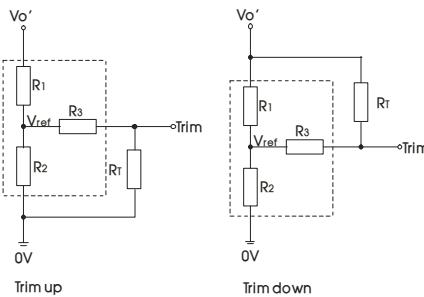

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3$$

$$\alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

R_T = Trim Resistor value
 α = self-defined parameter



$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3$$

$$\alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$

$V_{out}(V)$	$R_1(k\Omega)$	$R_2(k\Omega)$	$R_3(k\Omega)$	$V_{ref}(V)$
3.3	4.772	2.87	12.4	1.25
5	2.883	2.87	10	2.5
9	7.500	2.87	15	2.5
12	11.000	2.87	15	2.5
15	14.494	2.87	15	2.5
24	24.872	2.87	17.8	2.5



4. The products do not support parallel connection of their output
5. For additional information please refer to DC-DC converter application notes on
www.mornsun-power.com

Horizontal Package (without heat sink) Dimensions and Recommended Layout

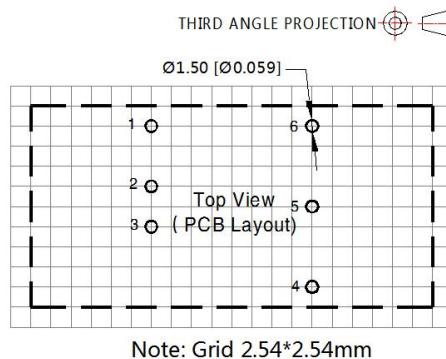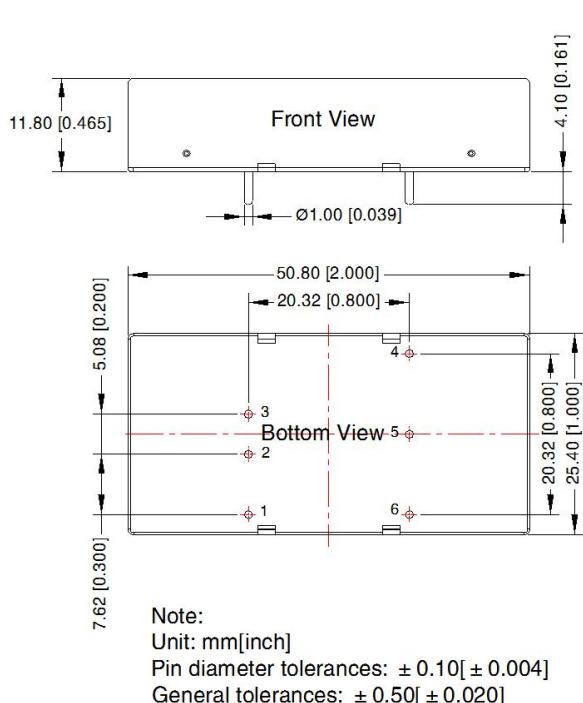

Pin-Out		
Pin	Single	Dual
1	Ctrl	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	Trim	0V
6	0V	-Vo


Horizontal Package (with heat sink) Dimensions

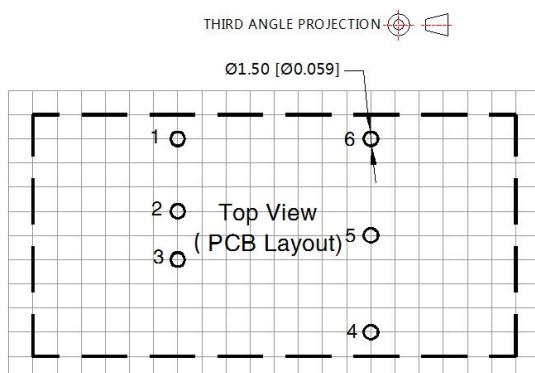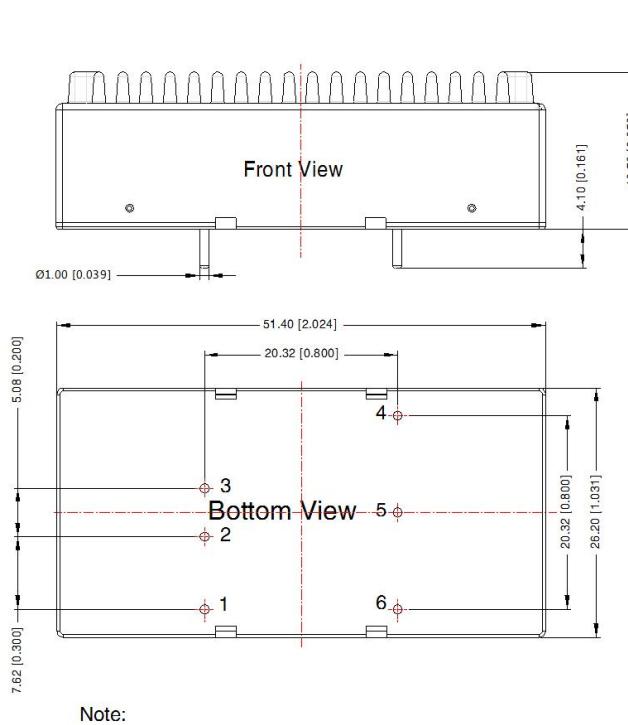


Pin-Out		
Pin	Single	Dual
1	Ctrl	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	Trim	0V
6	0V	-Vo

URA_LD-20WR3A2S & URB_LD-20WR3A2S(without heat sink) Dimensions

THIRD ANGLE PROJECTION

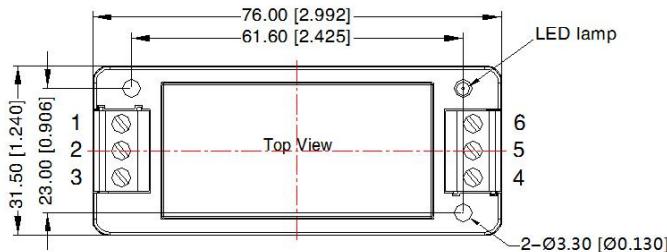


Pin-Out						
Pin	1	2	3	4	5	6
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo
Single	Ctrl	GND	Vin	+Vo	Trim	0V

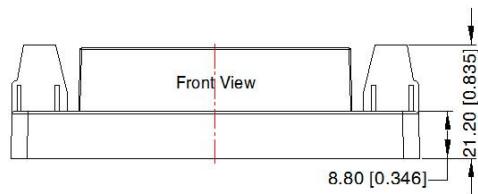


Note:
Unit: mm[inch]
Wire range: 24–12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ± 1.0[± 0.039]

URA_LD-20WHR3A2S & URB_LD-20WHR3A2S(with heat sink) Dimensions

THIRD ANGLE PROJECTION

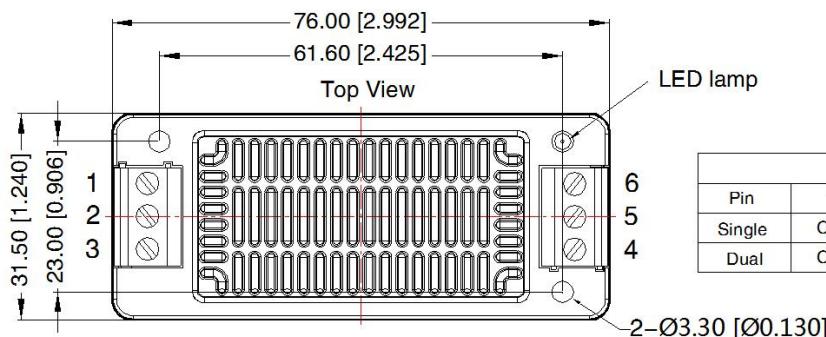


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	Trim	0V
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

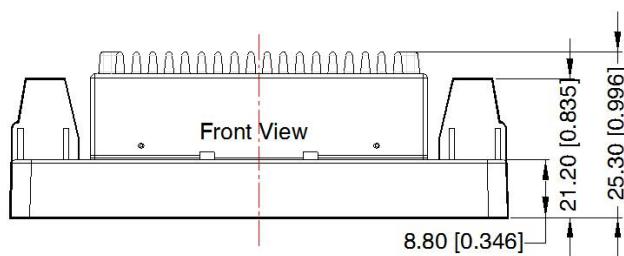


Note:
Unit: mm[inch]
Wire range: 24–12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ± 1.0[± 0.039]

URA_LD-20WR3A4S & URB_LD-20WR3A4S(without heat sink) Dimensions

THIRD ANGLE PROJECTION

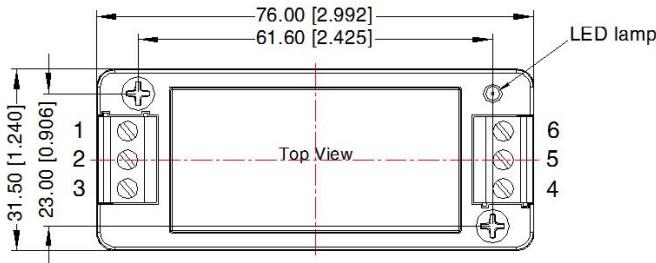


Pin-Out						
Pin	1	2	3	4	5	6
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo
Single	Ctrl	GND	Vin	+Vo	Trim	0V

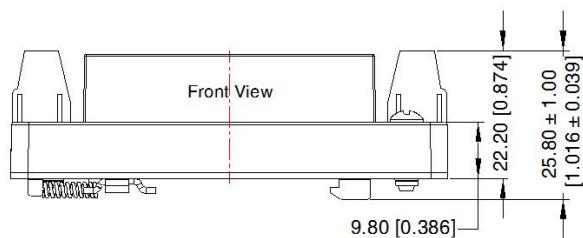


Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24–12 AWG
 Tightening torque: Max 0.4 N · m
 General tolerances: ± 1.00 [± 0.039]

URA_LD-20WHR3A4S & URB_LD-20WHR3A4S (with heat sink) Dimensions

THIRD ANGLE PROJECTION

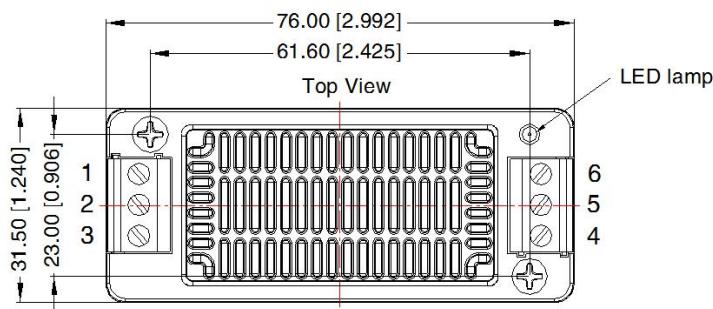

Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	Trim	0V
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

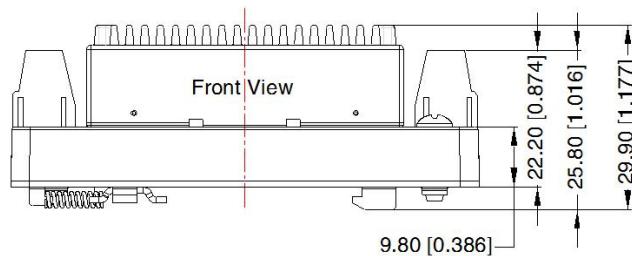

Note:
 Unit: mm[inch]
 Mounting rail: TS35
 Wire range: 24–12 AWG
 Tightening torque: Max 0.4 N · m
 General tolerances: ± 1.00 [± 0.039]

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. The Packaging bag number of Horizontal packaging: 58200035(without heat sink), 58200051(with heat sink), A2S/A4S packaging number: 58220022;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com