







#### ■ Features

- Constant Voltage + Constant Current mode output
- · Plastic housing with Class II design
- · Built-in active PFC function
- · Class 2 power unit
- Fully encapsulated with IP30 level, optional IP67 rating
- Typical lifetime>50000 hours
- 5 years warranty


## ■ Applications

- · LED downlight
- · LED spotlight
- · LED decorative lighting
- · LED tunnel lighting

## Description

LPF-16 series is a 16W AC/DC LED driver featuring the dual modes constant voltage and constant current output. LPF-16 operates from  $90\sim305$ VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the efficiency up to 86%, with the fanless design, the entire series is able to operate for  $-35^{\circ}\text{C} \sim +70^{\circ}\text{C}$  case temperature under free air convection. The entire series is suitable to work for a variety of applications at dry or damp locations and the optional models with IP67 rating is able to further work at wet locations.

## **■** Model Encoding

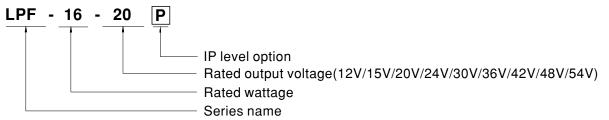

Туре	IP Level	Note
Blank	IP30	In Stock
Р	IP67	By request



# 16W Constant Voltage + Constant Current LED Driver


#### **SPECIFICATION**

MODEL		LPF-16-12	LPF-16-15	LPF-16-20	LPF-16-24	LPF-16-30	LPF-16-36	LPF-16-42	LPF-16-48	LPF-16-54		
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V		
OUTPUT	CONSTANT CURRENT REGION Note.2		8.25 ~ 15V	11 ~ 20V	13.2 ~ 24V	16.5 ~ 30V	19.8 ~ 36V	23.1 ~ 42V	26.4 ~ 48V	29.7 ~ 54V		
	RATED CURRENT	1.34A	1.07A	0.8A	0.67A	0.54A	0.45A	0.39A	0.34A	0.3A		
		16.08W	16.05W	16W	16.08W	16.2W	16.2W	16.38W	16.32W	16.2W		
	RIPPLE & NOISE (max.) Note.3		150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p		
	VOLTAGE TOLERANCE Note.4	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	SETUP, RISE TIME Note.6	1500ms, 80ms / 115VAC 500ms, 80ms / 230VAC										
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms /115VAC 500IIIS / 800IIIS / 230VAC										
INPUT	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC										
	FREQUENCY RANGE	47 ~ 63Hz										
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)										
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC,230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)										
	EFFICIENCY (Typ.)	84%	84%	86%	86%	86%	86%	86%	86%	86%		
	AC CURRENT	0.4A / 115VA	0.25A/	230VAC 0.2	A/277VAC							
	INRUSH CURRENT(Typ.)	COLD START	T45A(twidth=2	200μs measure	d at 50% Ipeal	at 230VAC; P	er NEMA 410					
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	14 units (circuit breaker of type B) / 24 units (circuit breaker of type C) at 230VAC										
	LEAKAGE CURRENT	<0.75mA/24	0VAC									
	OVER CURRENT	95 ~ 108%										
		Constant current limiting, recovers automatically after fault condition is removed  Hiccup mode, recovers automatically after fault condition is removed										
	SHORT CIRCUIT				1		I	T.,	1	1		
PROTECTION	OVER VOLTAGE	15 ~ 18V Shut down an	17.5 ~ 21V d latch off o/p	23 ~ 27V voltage, re-pov	28 ~ 35V ver on to recov	34 ~ 40V er	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V		
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down										
	WORKING TEMP.	Tcase=-35 ~ +70°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)										
	MAX. CASE TEMP.	Tcase=+70°C										
	WORKING HUMIDITY	20 ~ 95% RH non-condensing										
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,	10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/℃ (0	~50°C)									
	VIBRATION	10 ~ 500Hz, 2	G 12min./1cyd	cle, period for	72min. each al	ong X, Y, Z axe:	S					
	SAFETY STANDARDS Note.8	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes  UL8750, CSA C22.2 No. 250.0-08; ENEC EN61347-1, EN61347-2-13 independent, EN62384, J61347-1, J61347-2-13,  EAC TP TC 004, GB19510.1, GB19510.14 approved, IP67 (optional); Design refer to UL60950-1, TUV EN60950-1										
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75	KVAC									
EMC	ISOLATION RESISTANCE	I/P-O/P:100N	/ Ohms / 500\	/DC / 25°C / 70	% RH							
EIVIC	EMC EMISSION Note.8	Compliance to EN55015,EN61000-3-2 Class C (@load ≥ 50%); EN61000-3-3,GB17743 and GB17625.1,EAC TP TC 020										
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Line 2KV),EAC TP TC 020										
OTHERS	MTBF	473.3Khrs min. MIL-HDBK-217F (25°C)										
	DIMENSION	148*40*32mr	n (L*W*H)									
	PACKING	0.21Kg; 40pc	s/9.4Kg/1.02C	UFT								
NOTE	All parameters NOT specially     Please refer to "DRIVING M     Ripple & noise are measured     Tolerance: includes set up to     De-rating may be needed ur     Length of set up time is mea     The driver is considered as a complete installation, the fina     To fulfill requirements of the I without permanently connected     This series meets the typical lo. Please refer to the warranty	ETHODS OF at 20MHz of balerance, line re- nder low input asured at first of a component to al equipment natest ErP regued to the main al life expectancy statement or	LED MODULE andwidth by us gulation and lo voltages. Plea cold start. Turn hat will be open nanufacturers lation for lighti s. cy of >50,000 l	E". sing a 12" twist pad regulation. use refer to "ST ning ON/OFF the erated in combit must re-qualify ng fixtures, this thours of opera 's website at h	ed pair-wire te ATIC CHARA ne driver may ination with fin EMC Directiv s LED driver c tion when Tca	rminated with a CTERISTIC" so lead to increas al equipment. Se on the complean only be use use, particularly anwell.com	0.1uf & 47uf p ections for det e of the set up Since EMC pe lete installatior d behind a sw  (tc) point (or 1)	arallel capacito ails. time. rformance will a again. itch	be affected by , is about 70°C	or less.		




#### ■ BLOCK DIAGRAM

fosc: 100KHz

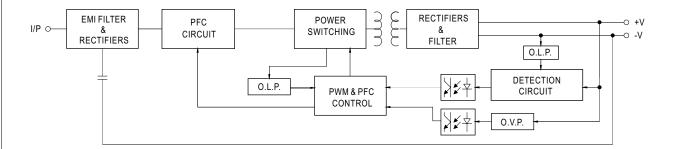

#### ■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

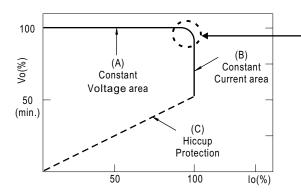


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.



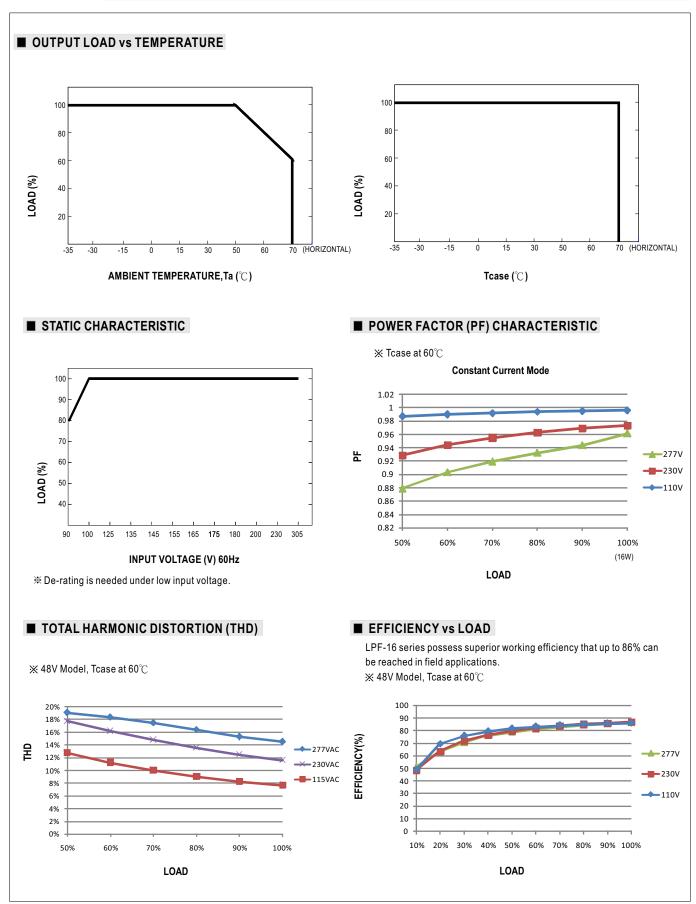




# **■** LIFE TIME

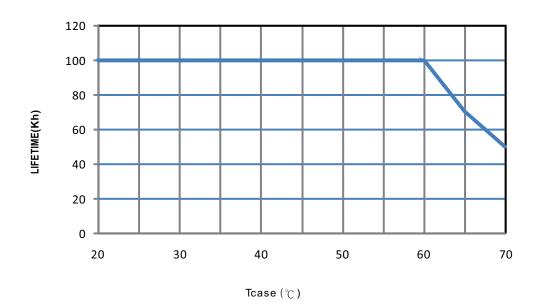



### ■ MECHANICAL SPECIFICATION

CASE NO.: LPF-16A Unit:mm

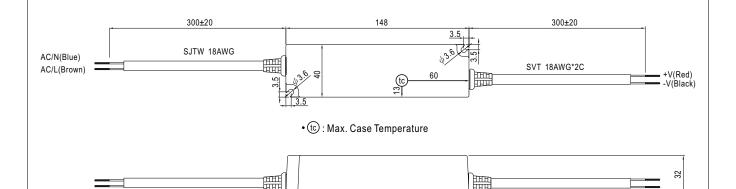

## ■ Recommend Mounting Direction



#### **■ INSTALLATION MANUAL**

Please refer to : http://www.meanwell.com/manual.html