





















Features


- · Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- · 250% peak power capability
- · High efficiency up to 89%
- · Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Cooling by free air convection
- 1U low profile 38mm
- · Built-in remote sense function
- 5 years warranty

Applications

- Industrial automation machinery
- Industrial control system
- · Mechanical and electrical equipment
- · Diagnostic or biological facilities
- Test or measurement systems
- Telecommunication equipment

Description

HRP-150N is a 150W single output type AC/DC power supply. This series operates for 85~264VAC input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by free air convection, working for the temperature up to 70°C without cover. Moreover, HRP-150N provides 250% short-duration peak power for motor applications and electromechanical loads requiring much higher power during start-up.

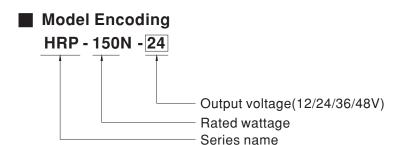




SPECIFICATION

MODEL		HRP-150N-12	HRP-150N-24	HRP-150N-36	HRP-150N-48		
ОИТРИТ	DC VOLTAGE	12V	24V	36V	48V		
	RATED CURRENT	13A	6.5A	4.3A	3.3A		
	CURRENT RANGE	0 ~ 13A	0 ~ 6.5A	0 ~ 4.3A	0 ~ 3.3A		
	RATED POWER	156W	156W	154.8W	158.4W		
	RIPPLE & NOISE (max.) Note.2		150mVp-p	200mVp-p	240mVp-p		
	VOLTAGE ADJ. RANGE	10.2 ~ 13.8V	21.6 ~ 28.8V	28.8 ~ 39.6V	40.8 ~ 55.2V		
	VOLTAGE TOLERANCE Note.3	±1.5%	±1.5%	±1.5%	±1.5%		
	LINE REGULATION	±0.3%	±0.2%	±0.2%	±0.2%		
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%		
	SETUP, RISE TIME	3000ms, 50ms/230VAC 3000ms, 50ms/115VAC at full load					
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load					
	, , , ,	85 ~ 264VAC 120 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)		B/115VAC at full load				
INPUT	EFFICIENCY (Typ.)	88% 88% 89% 89%					
	AC CURRENT (Typ.)			0970	0976		
	INRUSH CURRENT (Typ.)	1.7A/115VAC 0.9A/230VAC 0.9A/230VAC 70A/230VAC					
	LEAKAGE CURRENT	<1mA/240VAC					
	LEARAGE CURRENT		0/ rated autnut namer for more t	han E accords and than abut	down of voltage to newer		
	OVERLOAD	Normally works within 105 ~ 200% rated output power for more than 5 seconds and then shut down o/p voltage, re-power on to recover Constant current limiting for output power >280% rated for more than 5 seconds and then shut down o/p voltage, re-power					
PROTECTION		on to recover	at power > 200 /0 rated for more t	nan o socialis and then share	own orp voltage, to power		
	OVED VOLTA OF	14.4 ~ 16.8V	30 ~ 34.8V	41.4 ~ 48.6V	57.6 ~ 67.2V		
	OVER VOLTAGE	Protection type: Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	Shut down o/p voltage, recovers	s automatically after temperatu	re goes down			
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating	Curve")				
	WORKING HUMIDITY	20~90% RH non-condensing					
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-50 ~ +85°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.04%/°C (0~50°C)					
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes					
	OPERATING ALTITUDE Note.6						
	SAFETY STANDARDS	UL62368-1, TUV EN62368-1, EAC TP TC 004, AS/NZS 62368.1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVA	C O/P-FG:0.5KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M	Ohms / 500VDC / 25°C / 70% R	Н			
		Parameter	Standard	Test	Level / Note		
	EMC EMISSION	Conducted	EN55032	Class	В		
		Radiated	EN55032	Class	ВВ		
		Harmonic current	EN61000-3-2	Class	s A		
SAFETY &		Voltage Flicker	EN61000-3-3				
EMC	EMC IMMUNITY	EN55035 , EN61000-6-2(EN50082-2)					
(Note 5)		Parameter	Standard	Test	Level / Note		
		ESD	EN61000-4-2	Leve	3, 8KV air; Level 2, 4KV contact		
		RF field	EN61000-4-3	Leve	3, 10V/m		
		EFT/ Burst	EN61000-4-4	Leve	3, 2KV		
		Surge	EN61000-4-5	Leve	4, 4KV/Line-FG; 2KV/Line-Line		
		Conducted	EN61000-4-6	Leve	3, 10V		
		Magnetic Field	EN61000-4-8	Leve	4, 30A/m		
		Voltage Dips and Interruptions	EN61000-4-11		dip 0.5 periods, 30% dip 25 periods, interruptions 250 periods		
	MTBF	578.15K hrs min. Telcordia TR/SR-332 (Bellcore) ; 221.71K hrs min. MIL-HDBK-217F (25° C)					
OTHERS	DIMENSION	159*97*38mm (L*W*H)					
	PACKING	0.54Kg; 24pcs/12.96Kg/0.9CUFT					
NOTE	2. Ripple & noise are measure 3. Tolerance : includes set up 4. Derating may be needed up 5. The power supply is consider a 360mm*360mm metal plate perform these EMC tests, p 6. The ambient temperature descriptions.	ally mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. ed at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. nder low input voltages. Please check the derating curve for more details. dered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on ate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to blease refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft) or: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx					




■ Block Diagram

PWM fosc:90KHz

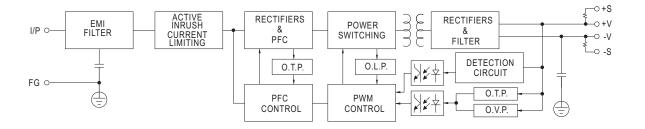

■ Derating Curve


■ Output Derating VS Input Voltage

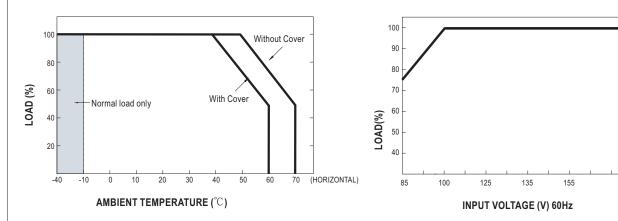

■ Function Manual

1.Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5 V.

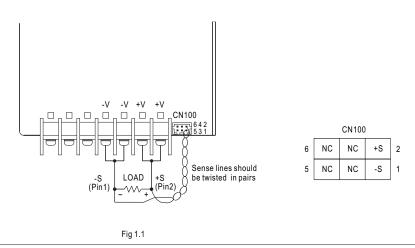

264



2.Peak Power

$$P_{\text{av}} = \frac{P_{\text{pk}} \ x \ t + P_{\text{npk}} \ x \ \left(\text{T--t}\right)}{T} \leqslant \ P_{\text{rated}}$$

Duty
$$\frac{t}{T}$$
 x 100% \leq 35%

 $t \le 5 \, \text{sec}$

Pav: Average output power (W)


P_{pk}: Peak output power (W)


 P_{npk} : Non-peak output power(W)

P_{rated}: Rated output power(W)

t : Peak power width (sec)

T: Period(sec)



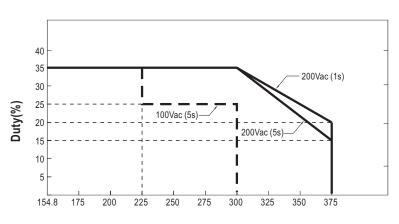

Peak output power (W)

For example (12V model):

Vin = 100V Duty_max = 25%

 P_{av} = Prated = 156W

 $P_{nk} = 300W$

t ≤ 5 sec

T ≧ 20 sec


$$P_{av} = \frac{P_{pk} X t + P_{npk} X (T-t)}{T} = \frac{300 x 5 + P_{npk} (20-5)}{20} \le 156W$$


 $P_{npk} \le 108W$



■ Mechanical Specification

Case No.901I Unit:mm

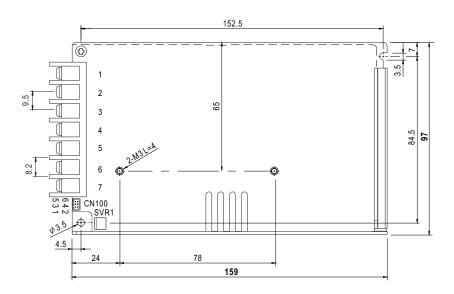

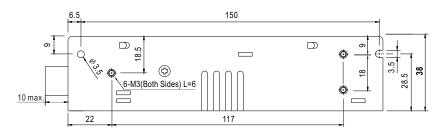

Terminal Pin No. Assignment:

· ·								
Pin No.	Assignment	Pin No.	Assignment					
1	AC/L	4,5	DC OUTPUT -V					
2	AC/N	6,7	DC OUTPUT +V					
3	FG ±							

Connector Pin No. Assignment (CN100): HRS DF11-6DP-2DSA or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	-S		
2	+S	HRS DF11-6DS	HRS DF11-**SC or equivalent
3~6	NC	or equivalent	

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html