



Disea Electronics Co., LTD

E-mail:sales@diseelec.com URL:www.diseelec.com

ADD: 4F,#3 Building, TianFuAn Industrial park,
LeZhuJiao, ZhouShi Road,XiXiang Town, BaoAn
District, ShenZhen City, GuangDong Province, China

PRODUCT SPECIFICATIONS

For Customer: _____

: APPROVAL FOR SPECIFICATION

Customer Model No. _____

: APPROVAL FOR SAMPLE

Module No.: ZW-T070BAHA-09P

Date : 2019-4-26

Table of Contents

No.	Item	Page
1	Cover Sheet(Table of Contents)	
2	Revision Record	
3	General Specifications	
4	Outline Drawing	
5	Absolute Maximum Ratings	
6	Electrical Specifications	
7	Optical Characteristics	
8	Reliability Test Items and Criteria	
9	Precautions for Use of LCD Modules	

For Customer's Acceptance:

Approved By	Comment

PREPARED	CHECKED	VERIFIED BY QA DEPT	VERIFIED BY R&D DEPT
sherlock			

3. General Specifications

ZW-T070BAHA-09P is a TFT-LCD module. It is composed of a TFT-LCD panel, driver IC, FPC, RTP and a back light unit. The 7.0" display area contains 1024 x 600 pixels and can display up to 16.7M colors. This product accords with RoHS environmental criterion.

Item	Contents	Unit	Note
LCD Type	TFT	-	
Display color	16.7M		
Viewing Direction	ALL	O'Clock	
Operating temperature	-20~+70	°C	
Storage temperature	-30~+80	°C	
Module size	Refer to outline drawing	mm	
Active Area(W×H)	154.21X85.92	mm	
Number of Dots	1024*600	dots	
Controller	HX8282A11/HX8696A01	-	
Power Supply Voltage	3.3	V	
Outline Dimensions	Refer to outline drawing	-	
Backlight	3*10-LEDs (white)	pcs	
Weight	---	g	
Interface	LVDS	-	

4.Outline.Drawing

DISEA

5. Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

5.1 Electrical Absolute Maximum Ratings.($V_{ss}=0\text{V}$, $T_a=25^\circ\text{C}$)

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	-0.3	3.6	V	1, 2

Notes:

1. If the module is above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
2. $V_{DD} > V_{SS}$ must be maintained.
3. Please be sure users are grounded when handing LCD Module.

5.2 Environmental Absolute Maximum Ratings.

Item	Storage		Operating		Note
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-30°C	80°C	-20°C	70°C	1,2
Humidity	-	-	-	-	3

1. The response time will become lower when operated at low temperature.
2. Background color changes slightly depending on ambient temperature.
The phenomenon is reversible.
3. $T_a < 40^\circ\text{C}$: 85%RH MAX.

$T_a > 40^\circ\text{C}$: Absolute humidity must be lower than the humidity of 85%RH at 40°C .

6. Electrical Specifications and Instruction Code

6.1 Electrical characteristics($V_{SS}=0V, T_a=25^\circ C$)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Power supply	VDD	$T_a=25^\circ C$	3.0	3.3	3.6	V	
Input voltage	'H'	V_{IH}	$V_{DD}=3.3V$	$0.8V_{DD}$	-	V_{DD}	V
	'L'	V_{IL}	$V_{DD}=3.3V$	0	-	$0.2V_{DD}$	V

Note: 1: Tested in 1×1 chessboard pattern.


6.2 Operating Condition for LCD($V_{SS}=0V, T_a=25^\circ C$)

Parameter	Symbol	MIN	TYP	MAX	Unit	Remark
Digital supply Voltage	VDD	3.00	3.30	3.60	V	-
Analog supply Voltage	AVDD	9.1	9.6	10.1	V	
Gate on voltage	VGH	17	18	19	V	
Gate off voltage	VGL	-7	-6	-5	V	
Common Electrode Driving Signal	VCOM	2.7	3.2	3.7	V	
Input Signal Voltage	Low Level	V_{IL}	0	-	$0.3*DVDD$	V
	High Level	V_{IH}	$0.7*DVDD$	-	DVDD	V
Current of digital supply voltage	IVDD	-	10	-	mA	$V_{DD}=3.3V$ color bar pattern
Current of analog supply voltage	IAVDD	-	25	-	mA	$AV_{DD}=9.5V$ color bar pattern
Current of Gate on voltage	IVGH	-	5.5	-	mA	$V_{GH}=18.0V$

Current of Gate off voltage	IVGL	-	8.0	-	mA	VGL=-6.0V
-----------------------------	------	---	-----	---	----	-----------

6.3 LED backlight specification(VSS=0V ,Ta=25°C)

Item	Symbol	Condition	Min	Typ	Ma x	Unit	Note
Supply voltage	V_f	$I_f=200mA$	-	9.0	-	V	
Uniformity	ΔBp	$I_f=200mA$	75	-	-	%	
Life Time	T	$I_f=200mA$	-	20000	-	Hours	

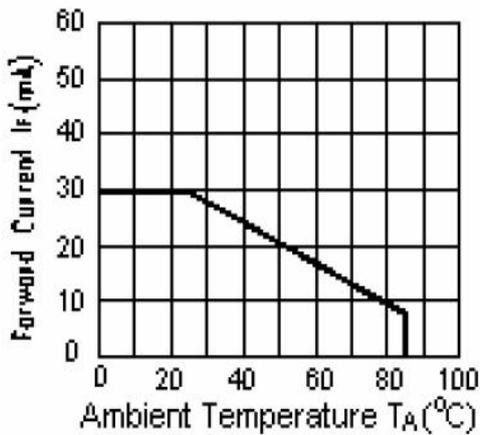

ILED VS TEMP

6.4 Interface signals

Pin No.	Symbol	I/O	Function
1	VCOM	P	Common voltage
2-3	VDD	P	Power supply
4	NC	-	No connect
5	RESET	I	Global reset pin
6	STBYB	I	Stand mode: SBYB=1,normal operation SBYB=0,timing control,source driver will turn off,all output are hight-Z
7	GND	P	Ground
8	RXIN0-	I	-LVDS differential data input
9	RXIN0+	I	+LVDS differential data input
10	GND	P	Ground
11	RXIN1-	I	-LVDS differential data input
12	RXIN1+	I	+LVDS differential data input
13	GND	P	Ground
14	RXIN2-	I	-LVDS differential data input
15	RXIN2+	I	+LVDS differential data input
16	GND	P	Ground
17	RxCLKIN-	I	-LVDS differential clock input
18	RxCLKIN+	I	+LVDS differential clock input
19	GND	P	Ground
20	RXIN3-	I	-LVDS differential data input
21	RXIN3+	I	+LVDS differential data input
22	GND	P	Ground
23-24	NC	-	No connection
25	GND	P	Ground
26-27	NC	-	No connection
28	SELB(HSD)	I	6bit/8bit select H:6bit, L:8bit
29	AVDD	P	Power for analog circuit
30	GND	P	Ground

31-32	LED-	P	LED Cathode
33	SHLR	PI	Source Right or Left sequence
34	UPDN	PI	Gate Up or Down scan control
35	VGL	P	Gate OFF Voltage
36-37	NC	-	NC
38-39	VGH	P	GATE ON VOLTAGE
39-40	LED+	P	LED Anode

DISEA

7. Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Brightness	Bp	$\theta=0^\circ$ $\Phi=0^\circ$	-	400	-	Cd/m ²	1
Uniformity	ΔBp		75	-	-	%	1,2
Viewing Angle	3:00	Cr \geq 10	-	80	-	Deg	3
	6:00		-	80	-		
	9:00		-	80	-		
	12:00		-	80	-		
Contrast Ratio	Cr	$\theta=0^\circ$ $\Phi=0^\circ$	600	800	-	-	4
Response Time	T _r		-	10	-	ms	5
	T _f	-	10	-	ms		
Color of CIE Coordinate	W	x	$\theta=0^\circ$ $\Phi=0^\circ$	0.28	-	-	1,6
		y		0.33	-	-	
	R	x		0.51	-	-	
		y		0.34	-	-	
	G	x		0.31	-	-	
		y		0.56	-	-	
	B	x		0.15	-	-	
		y		0.14	-	-	
NTSC Ratio	S		50	60	-	%	


Note: The parameter is slightly changed by temperature, driving voltage and materiel

Note 1: The data are measured after LEDs are turned on for 5 minutes. LCM displays full white. The brightness is the average value of 9 measured spots. Measurement equipment BM-7 (Φ5mm)

Measuring condition:

- Measuring surroundings: Dark room.
- Measuring temperature: $T_a=25\text{ }^\circ\text{C}$.
- Adjust operating voltage to get optimum contrast at the center of the display.

Measured value at the center point of LCD panel after more than 5 minutes while backlight turning on.

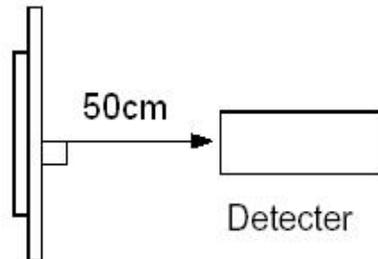


Note 2: The luminance uniformity is calculated by using following formula.

$$\Delta B_p = B_p (\text{Min.}) / B_p (\text{Max.}) \times 100 (\%)$$

$B_p (\text{Max.})$ = Maximum brightness in 9 measured spots

$B_p (\text{Min.})$ = Minimum brightness in 9 measured spots.

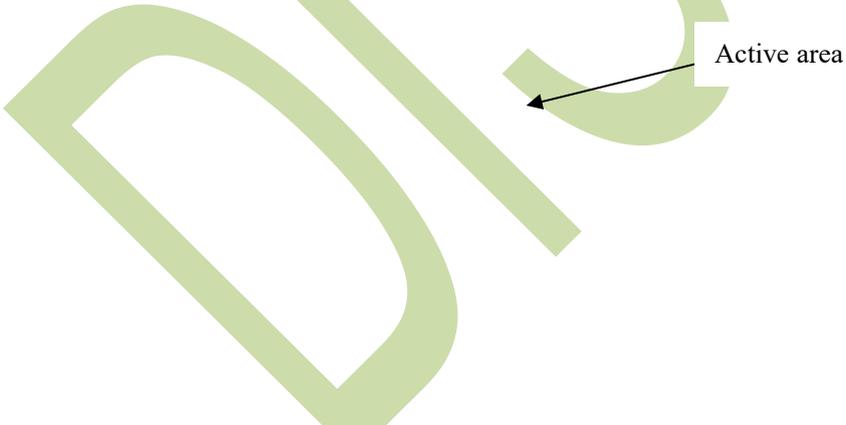


Active area

A diagram of a display panel with a large, light green watermark 'DISEA' overlaid. An arrow points from the text 'Active area' to a specific region on the panel.

Note 3: The definition of viewing angle:


Refer to the graph below marked by ϑ and ϕ

Note 4: Definition of contrast ratio.(Test LCD using DMS501)

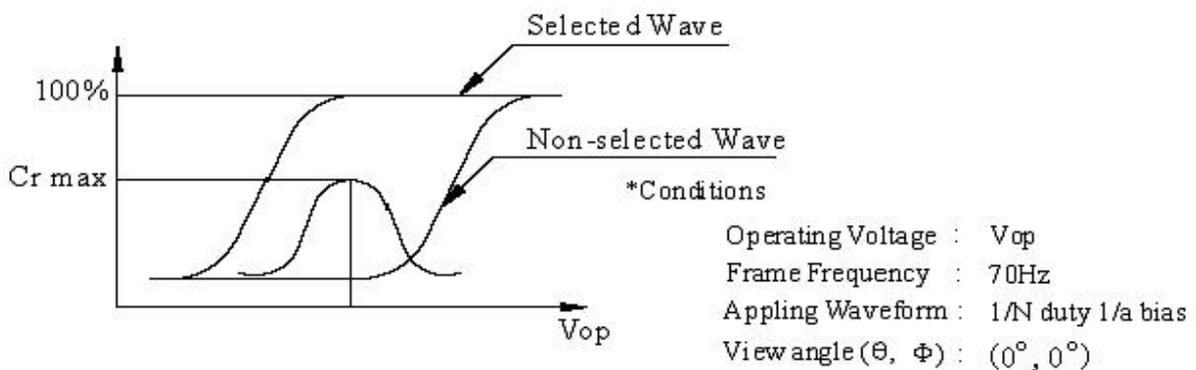


Note 5: Definition of Response time. (Test LCD using DMS501):

The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes.Refer to figure as below.

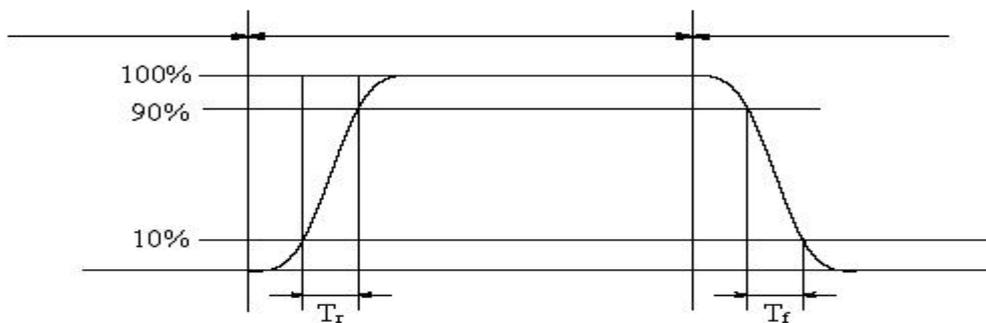

The definition of response time


Note 6: Definition of Color of CIE Coordinate and NTSC Ratio.

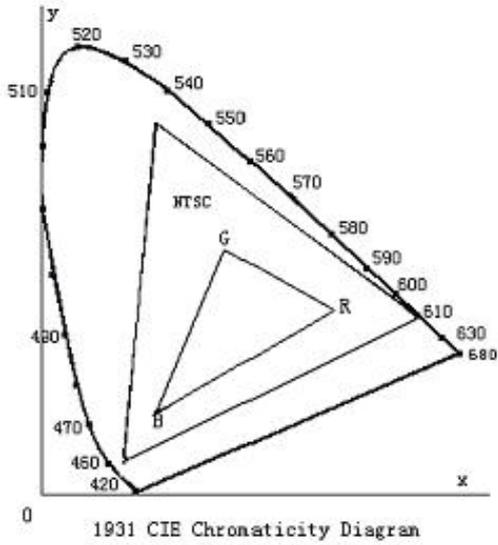

Color gamut:

Note 7: Definition of cross talk.

$$\text{Cross talk ratio(\%)} = \frac{|\text{pattern A Brightness} - \text{pattern B Brightness}|}{\text{pattern A Brightness}} * 100$$

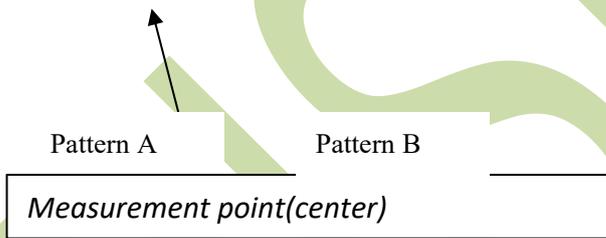

Electric volume value=3F+/-3Hex

8. Reliability Test Items and Criteria

No	Test Item	Test condition	Criterion
1	High Temperature Storage	80°C±2°C 96H Restore 2H at 25°C Power off	1. After testing, cosmetic and electrical defects should not happen. 2. Total current consumption should not be more than twice of initial value.
2	Low Temperature Storage	-30°C±2°C 96H Restore 2H at 25°C Power off	
3	High Temperature Operation	70°C±2°C 96H Restore 2H at 25°C Power on	
4	Low Temperature Operation	-20°C±2°C 96H Restore 4H at 25°C Power on	
5	High Temperature/Humidity Operation	60°C±2°C 90%RH 96H Power on	
6	Temperature Cycle	-30°C —————> 80°C 30min 5min 30min after 5 cycle, Restore 2H at 25°C Power off	

Note: Operation: Supply 3.3V for logic system.

The inspection terms after reliability test, as below

ITEM	Inspection
Contrast	CR>50%
IDD	IDD<200%
Brightness	Brightness>60%
Color Tone	Color Tone+/-0,05

9. Precautions for Use of LCD Modules

9.1 Handling Precautions

9.1.1 *The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.*

9.1.2 *If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.*

9.1.3 *Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.*

9.1.4 *The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.*

9.1.5 *If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:*

— Isopropyl alcohol — Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

— Water — Ketone — Aromatic solvents

9.1.6 *Do not attempt to disassemble the LCD Module.*

9.1.7 *If the logic circuit power is off, do not apply the input signals.*

9.1.8 *To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.*

a. Be sure to ground the body when handling the LCD Modules.

b. Tools required for assembly, such as soldering irons, must be properly ground.

c. To reduce the amount of static electricity generated, do not conduct assembly and other work

under dry conditions.

d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

9.2 Storage precautions

9.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

9.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : 0 °C ~ 40 °C

Relatively humidity: ≤80%

9.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

9.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

END