


Metallized Polyester (PET) Capacitors in PCM 5 mm. Capacitances from 0.01 μF to 10 μF . Rated Voltages from 50 VDC to 630 VDC.

Special Features

- High volume/capacitance ratio
- Self-healing
- AEC-Q200 qualified 
- According to RoHS 2011/65/EU

Typical Applications

For general DC-applications e.g.

- By-pass
- Blocking
- Coupling and decoupling
- Timing

Construction


Dielectric:

Polyethylene-terephthalate (PET) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

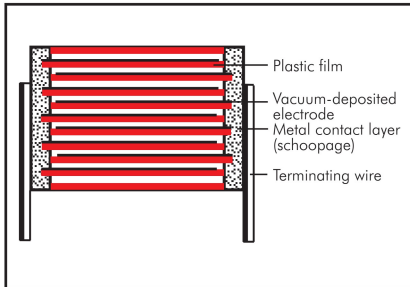

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Silver/White.

Electrical Data

Capacitance range:

0.01 μF to 10 μF (E12-values on request)

Rated voltages:

50 VDC, 63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

$U_r = 50 \text{ VDC}$: -55°C to $+100^\circ \text{C}$

$U_r \geq 63 \text{ VDC}$: -55°C to $+125^\circ \text{C}$

Climatic test category:

55/100/21 in accordance with IEC

Insulation resistance at $+20^\circ \text{C}$:

U_r	U_{test}	$C \leq 0.33 \mu\text{F}$	$0.33 \mu\text{F} < C \leq 10 \mu\text{F}$
50 VDC	10 V	$\geq 5 \times 10^3 \text{ M}\Omega$	$\geq 1000 \text{ sec (M}\Omega \times \mu\text{F)}$
63 VDC	50 V	$\geq 1 \times 10^4 \text{ M}\Omega$	$\geq 1250 \text{ sec (M}\Omega \times \mu\text{F)}$
$\geq 100 \text{ VDC}$	100 V	$\geq 1.5 \times 10^4 \text{ M}\Omega$	$\geq 3000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring time: 1 min.

Dissipation factors at $+20^\circ \text{C}$: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 8 \times 10^{-3}$	$\leq 8 \times 10^{-3}$	$\leq 10 \times 10^{-3}$
10 kHz	$\leq 15 \times 10^{-3}$	$\leq 15 \times 10^{-3}$	–
100 kHz	$\leq 30 \times 10^{-3}$	–	–

Maximum pulse rise time: for pulses equal to the rated voltage

Capacitance μF	Pulse rise time V/ μsec max. operation/test					
	50 VDC	63 VDC	100 VDC	250 VDC	400 VDC	630 VDC
0.01 ... 0.022	–	35/350	35/350	50/500	80/800	110/1100
0.033 ... 0.068	–	20/200	25/250	50/500	80/800	90/900
0.1 ... 0.47	10/100	15/150	20/200	50/500	80/800	–
0.68 ... 1.0	8/80	12/120	15/150	25/250	–	–
1.5 ... 3.3	8/80	7.5/75	10/100	–	–	–
4.7	5/50	5/50	–	–	–	–
6.8	3/30	3/30	–	–	–	–
10	2.5/25	–	–	–	–	–

Mechanical Tests

Pull test on pins:

10 N in direction of pins according to IEC 60068-2-21

Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data


Capacitance	50 VDC/30 VAC*					63 VDC/40 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF						2.5	6.5	7.2	5	MKS2C021001A00_
0.015 "						2.5	6.5	7.2	5	MKS2C021501A00_
0.022 "						2.5	6.5	7.2	5	MKS2C022201A00_
0.033 "						2.5	6.5	7.2	5	MKS2C023301A00_
0.047 "						2.5	6.5	7.2	5	MKS2C024701A00_
0.068 "						2.5	6.5	7.2	5	MKS2C026801A00_
0.1 μF						2.5	6.5	7.2	5	MKS2C031001A00_
0.15 "						2.5	6.5	7.2	5	MKS2C031501A00_
0.22 "						3	7.5	7.2	5	MKS2C032201B00_
0.33 "	2.5	6.5	7.2	5	MKS2B033301A00_	3.5	8.5	7.2	5	MKS2C033301C00_
0.47 "	3	7.5	7.2	5	MKS2B034701B00_	3.5	8.5	7.2	5	MKS2C034701C00_
0.68 "	3.5	8.5	7.2	5	MKS2B036801C00_	4.5	9.5	7.2	5	MKS2C036801E00_
1.0 μF	3.5	8.5	7.2	5	MKS2B041001C00_	5	10	7.2	5	MKS2C041001F00_
1.5 "	4.5	9.5	7.2	5	MKS2B041501E00_	5.5	11.5	7.2	5	MKS2C041501H00_
2.2 "	5	10	7.2	5	MKS2B042201F00_	7.2	13	7.2	5	MKS2C042201K00_
3.3 "	5.5	11.5	7.2	5	MKS2B043301H00_	7.2	13	7.2	5	MKS2C043301K00_
4.7 "	7.2	13	7.2	5	MKS2B044701K00_	8.5	14	7.2	5	MKS2C044701M00_
6.8 "	8.5	14	7.2	5	MKS2B046801M00_	11	16	7.2	5	MKS2C046801N00_
10 μF	11	16	7.2	5	MKS2B051001N00_					

Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	2.5	6.5	7.2	5	MKS2D021001A00_	2.5	6.5	7.2	5	MKS2F021001A00_
0.015 "	2.5	6.5	7.2	5	MKS2D021501A00_	2.5	6.5	7.2	5	MKS2F021501A00_
0.022 "	2.5	6.5	7.2	5	MKS2D022201A00_	2.5	6.5	7.2	5	MKS2F022201A00_
0.033 "	2.5	6.5	7.2	5	MKS2D023301A00_	3.5	8.5	7.2	5	MKS2F023301C00_
0.047 "	2.5	6.5	7.2	5	MKS2D024701A00_	3.5	8.5	7.2	5	MKS2F024701C00_
0.068 "	2.5	6.5	7.2	5	MKS2D026801A00_	3.5	8.5	7.2	5	MKS2F026801C00_
0.1 μF	2.5	6.5	7.2	5	MKS2D031001A00_	4.5	9.5	7.2	5	MKS2F031001E00_
0.15 "	3.5	8.5	7.2	5	MKS2D031501C00_	5	10	7.2	5	MKS2F031501F00_
0.22 "	3.5	8.5	7.2	5	MKS2D032201C00_	5.5	11.5	7.2	5	MKS2F032201H00_
0.33 "	4.5	9.5	7.2	5	MKS2D033301E00_	7.2	13	7.2	5	MKS2F033301K00_
0.47 "	4.5	9.5	7.2	5	MKS2D034701E00_	8.5	14	7.2	5	MKS2F034701M00_
0.68 "	5	10	7.2	5	MKS2D036801F00_	11	16	7.2	5	MKS2F036801N00_
1.0 μF	7.2	13	7.2	5	MKS2D041001K00_					
1.5 "	8.5	14	7.2	5	MKS2D041501M00_					
2.2 "	11	16	7.2	5	MKS2D042201N00_					

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing.

Dims. in mm.



Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 149.

Rights reserved to amend design data without prior notification.

Continuation page 46

Continuation

General Data

Capacitance	400 VDC/200 VAC*					630 VDC/220 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μF	2.5	6.5	7.2	5	MKS2G021001A00_	5.5	11.5	7.2	5	MKS2J021001H00_
0.015 "	2.5	6.5	7.2	5	MKS2G021501A00_	7.2	13	7.2	5	MKS2J021501K00_
0.022 "	3.5	8.5	7.2	5	MKS2G022201C00_	7.2	13	7.2	5	MKS2J022201K00_
0.033 "	4.5	9.5	7.2	5	MKS2G023301E00_	7.2	13	7.2	5	MKS2J023301K00_
0.047 "	4.5	9.5	7.2	5	MKS2G024701E00_	8.5	14	7.2	5	MKS2J024701M00_
0.068 "	5.5	11.5	7.2	5	MKS2G026801H00_					
0.1 μF	7.2	13	7.2	5	MKS2G031001K00_					
0.15 "	8.5	14	7.2	5	MKS2G031501M00_					
0.22 "	11	16	7.2	5	MKS2G032201N00_					

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing.

Dims. in mm.

The values of the WIMA MKM 2 range according to the main catalogue 2009 are still available on request.

Part number completion:

Tolerance: 20 % = M


10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD






Taped version see page 149.

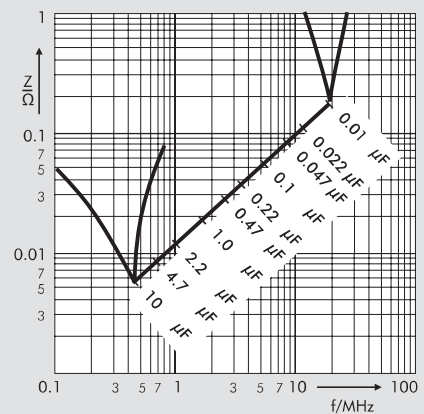

Impedance change with frequency (general guide).

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

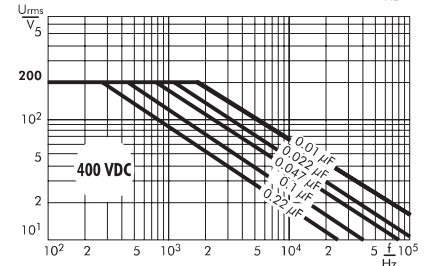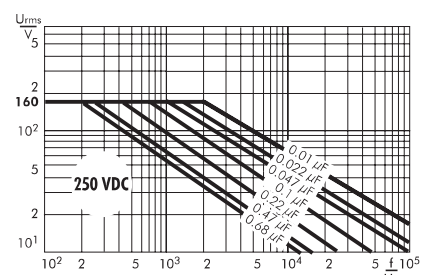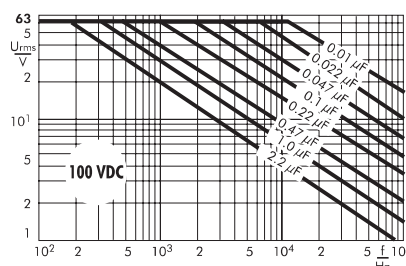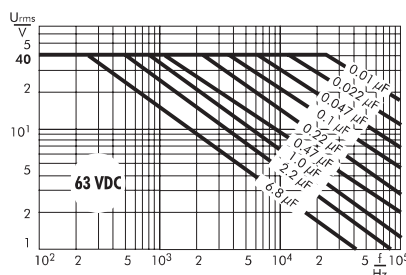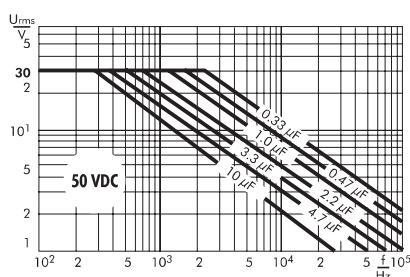

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

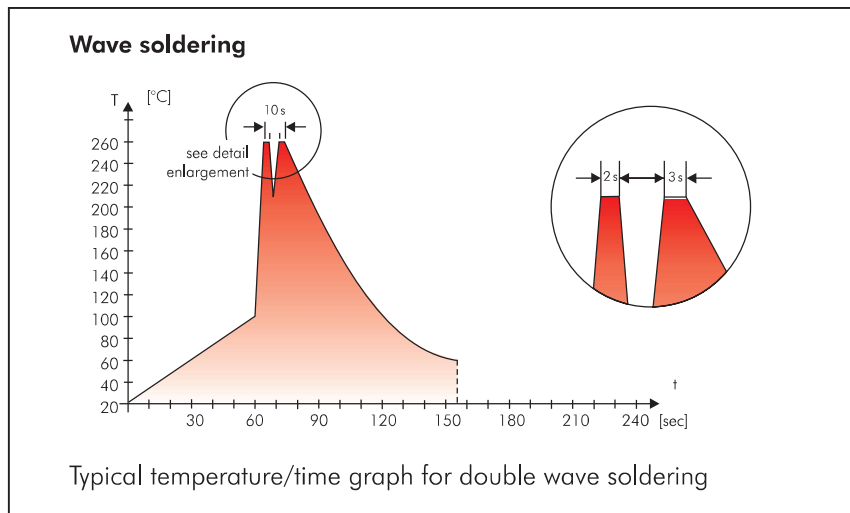

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the ifanz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei
konform RoHS 2011/65/EU

WIMA capacitors are lead free
in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

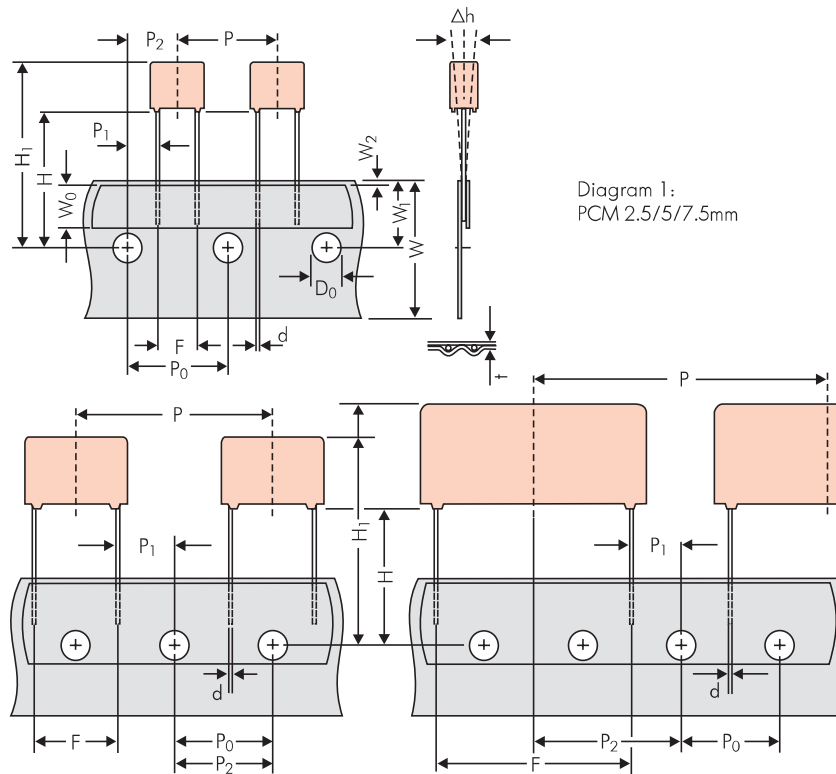


Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Dimensions for Radial Taping								
Designation	Symbol	PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3	16.5 ±0.3	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5
		18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	•0.5 ±0.05 or 0.6 ^{+0.05} _{-0.05}	•0.5 ±0.05 or 0.6 ^{+0.05} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 150)		ROLL/AMMO			AMMO			
		REEL ⌀ 360 max. ⌀ 30 ±1 } depending on comp. dimensions B 52 ±2 58 ±2			REEL ⌀ 360 max. ⌀ 30 ±1 } depending on PCM and component dimensions 52 ±2 B 58 ±2 or 66 ±2 REEL ⌀ 500 max. ⌀ 25 ±1 } 54 ±2 B 60 ±2 68 ±2			
Unit		see details page 151.						

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

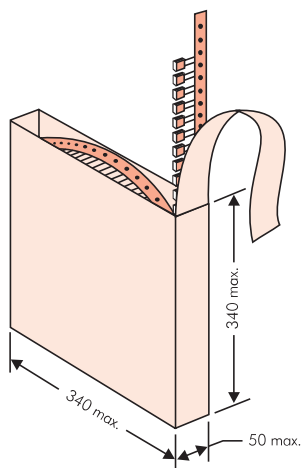

■ AMMO Packaging

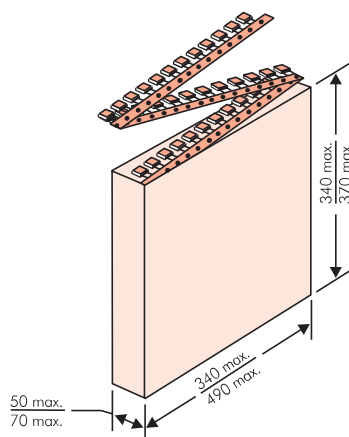

■ REEL Packaging

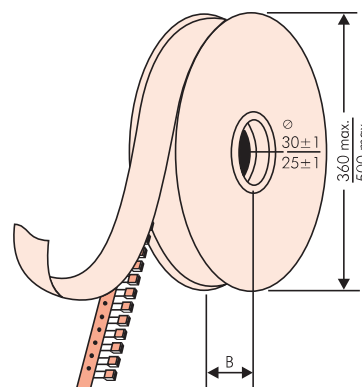

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made In Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K88D		
Handling Unit: MKS 2	QTY: 5.000	COO: DE	
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5		
1000067326	Standard 10% Loss - Standard Drähte 6-2		
Vorlage Debitor Inland	Week 03/2011		

BARCODE „Code 39“

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 x 340	490 x 370	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200	2500				2800			
	3	7.5	4.6	0C	5000		2000	2300				2300			
	3.8	8.5	4.6	0D	5000		1500	1800				1800			
	4.6	9	4.6	0E	5000		1200	1500				1500			
	5.5	10	4.6	0F	5000		900	1200				1200			
5 mm	2.5	6.5	7.2	1A	5000		2200	2500				2800			
	3	7.5	7.2	1B	5000		2000	2300				2300			
	3.5	8.5	7.2	1C	5000		1600	2000				2000			
	4.5	6	7.2	1D	6000		1300	1500				1500			
	4.5	9.5	7.2	1E	4000		1300	1500				1500			
	5	10	7.2	1F	3500		1100	1400				1400			
	5.5	7	7.2	1G	4000		1000	1200				1200			
	5.5	11.5	7.2	1H	2500		1000	1200				1200			
	6.5	8	7.2	1I	2500		800	1000				1000			
	7.2	8.5	7.2	1J	2500		700	1000				1000			
	7.2	13	7.2	1K	2000		700	950				1000			
	8.5	10	7.2	1L	2000		600	800				800			
	8.5	14	7.2	1M	1500		600	800				800			
	11	16	7.2	1N	1000		500	600				640			
7.5 mm	2.5	7	10	2A	5000			2500		4400		2500			
	3	8.5	10	2B	5000			2200		4300		2300		4150	
	4	9	10	2C	4000			1700		3200		1700		3100	
	4.5	9.5	10.3	2D	3500			1500		2900		1400		2700	
	5	10.5	10.3	2E	3000			1300		2500		1300			
	5.7	12.5	10.3	2F	2000			1000		2200		1100			
	7.2	12.5	10.3	2G	1500			900		1800		1000			
10 mm	3	9	13	3A	3000			1100		2200				1900	
	4	8.5	13.5	FA	3000			900		1600				1450	
	4	9	13	3C	3000			900		1600				1450	
	4	9.5	13	3D	3000			900		1600				1400	
	5	10	13.5	FB	2000			700		1300				1200	
	5	11	13	3F	3000			700		1300				1200	
	6	12	13	3G	2400			550		1100				1000	
	6	12.5	13	3H	2400			550		1100				1000	
15 mm	8	12	13	3I	2000			400		800				740	
	5	11	18	4B	2400			600		1200				1150	
	5	13	19	FC	1000			600		1200				1200	
	6	12.5	18	4C	2000			500		1000				1000	
	6	14	19	FD	1000			500		1000				1000	
	7	14	18	4D	1600			450		900				850	
	7	15	19	FE	1000			450		900				850	
	8	15	18	4F	1200			400		800				740	
	8	17	19	FF	500			400		800				740	
	9	14	18	4H	1200			350		700				650	
	9	16	18	4J	900			350		700				650	
22.5 mm	10	18	19	FG	500			300		650				590	
	11	14	18	4M	1000			300		600				540	
	5	14	26.5	5A	1200					800				770	
	6	15	26.5	5B	1000					700				640	
	7	16.5	26.5	5D	760					600				550	
	8	20	28	FH	500					500				480	
	8.5	18.5	26.5	5F	500					480				450	
	10	22	28	FI	570*					420				380	
22.5 mm	10.5	19	26.5	5G	594*					400				360	
	10.5	20.5	26.5	5H	594*					400				360	
	11	21	26.5	5I	561*					380				350	
	12	24	28	FJ	480*					350				310	

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
						H16.5	H18.5	ø 360		ø 500		340 × 340		490 × 370	
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	–	–	–	–	460/340*	–	–	–	420	–
	11	21	31.5	6B	459*	–	–	–	–	380/280*	–	–	–	350	–
	13	24	31.5	6D	378*	–	–	–	–	300	–	–	–	290	–
	13	25	33	FK	405*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	324*	–	–	–	–	270	–	–	–	250	–
	15	26	33	FL	324*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	198*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	198*	–	–	–	–	–	–	–	–	–	–
	20	32	33	FM	162*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	162*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	441*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	357*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	294*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	252*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	154*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	140*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	126*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	112*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	84*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	120*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	80*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	84*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	25*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	25	45	57	9D	70*	–	–	–	–	–	–	–	–	–	–
	30	45	57	9E	60*	–	–	–	–	–	–	–	–	–	–
	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF				2.5×6.5×7.2		-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:				Size:				Tolerance:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022				4.8×3.3×3 Size 1812 = KA				±20% = M			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047				4.8×3.3×4 Size 1812 = KB				±10% = K			
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100				5.7×5.1×3.5 Size 2220 = QA				±5% = J			
FKP 02 = FKP0				250 VDC = F0		150 pF = 0150				5.7×5.1×4.5 Size 2220 = QB				±2.5% = H			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220				7.2×6.1×3 Size 2824 = TA				±1% = E			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330				7.2×6.1×5 Size 2824 = TB				...			
FKP 2 = FKP2				520 VDC = H2		470 pF = 0470				10.2×7.6×5 Size 4030 = VA							
FKS 3 = FKS3				600 VDC = I0		680 pF = 0680				12.7×10.2×6 Size 5040 = XA							
FKP 3 = FKP 3				630 VDC = J0		1000 pF = 1100				15.3×13.7×7 Size 6054 = YA							
MKS 2 = MKS2				700 VDC = K0		1500 pF = 1150				2.5×7×4.6 PCM 2.5 = 0B				Packing:			
MKP 2 = MKP2				800 VDC = L0		2200 pF = 1220				3×7.5×4.6 PCM 2.5 = 0C				AMMO H16.5 340×340 = A			
MKS 4 = MKS4				850 VDC = M0		3300 pF = 1330				2.5×6.5×7.2 PCM 5 = 1A				AMMO H16.5 490×370 = B			
MKP 4C = MKPC				900 VDC = N0		4700 pF = 1470				3×7.5×7.2 PCM 5 = 1B				AMMO H18.5 340×340 = C			
MKP 4 = MKP4				1000 VDC = O1		6800 pF = 1680				2.5×7×10 PCM 7.5 = 2A				AMMO H18.5 490×370 = D			
MKP 10 = MKP1				1100 VDC = P0		0.01 μF = 2100				3×8.5×10 PCM 7.5 = 2B				REEL H16.5 360 = F			
FKP 1 = FKP1				1200 VDC = Q0		0.022 μF = 2220				3×9×13 PCM 10 = 3A				REEL H16.5 500 = H			
MKP-X2 = MKX2				1250 VDC = R0		0.047 μF = 2470				4×9×13 PCM 10 = 3C				REEL H18.5 360 = I			
MKP-X1 R = MKX1				1500 VDC = S0		0.1 μF = 3100				5×11×18 PCM 15 = 4B				REEL H18.5 500 = J			
MKP-Y2 = MKY2				1600 VDC = T0		0.22 μF = 3220				6×12.5×18 PCM 15 = 4C				ROLL H16.5 = N			
MP 3-X2 = MPX2				2000 VDC = U0		0.47 μF = 3470				6×14×26.5 PCM 22.5 = 5A				ROLL H18.5 = O			
MP 3-X1 = MPX1				2500 VDC = V0		1 μF = 4100				5×15×26.5 PCM 22.5 = 5B				BLISTER W12 180 = P			
MP 3-Y2 = MPY2				3000 VDC = W0		2.2 μF = 4220				9×19×31.5 PCM 27.5 = 6A				BLISTER W12 330 = Q			
MP 3R-Y2 = MPRY				4000 VDC = X0		4.7 μF = 4470				11×21×31.5 PCM 27.5 = 6B				BLISTER W16 330 = R			
MKP 4F = MKPF				6000 VDC = Y0		10 μF = 5100				9×19×41.5 PCM 37.5 = 7A				BLISTER W24 330 = T			
Snubber MKP = SNMP				250 VAC = 0V		22 μF = 5220				11×22×41.5 PCM 37.5 = 7B				Bulk/TPS Standard = S			
Snubber FKP = SNFP				275 VAC = 1V		47 μF = 5470				19×31×56 PCM 48.5 = 8D				...			
GTO MKP = GTOM				300 VAC = 2V		100 μF = 6100				25×45×57 PCM 52.5 = 9D							
DC-LINK MKP 3 = DCP3				305 VAC = AV		220 μF = 6220				...							
DC-LINK MKP 4 = DCP4				350 VAC = BV		1000 μF = 7100											
DC-LINK MKP 4S = DCP5				440 VAC = 4W		1500 μF = 7150											
DC-LINK MKP 5 = DCP5				500 VAC = 5V		...											
DC-LINK MKP 6 = DCP6				...													
DC-LINK HC = DCHC																	
DC-LINK HY = DCHY																	