

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

# REVISION RECORD

| REV | CN | DESCRIPTION | DRFT | DATE |
|-----|----|-------------|------|------|
|     |    |             |      |      |

## General information:




- 1.Material: Aluminium die-cast
- 2.Colour: Grey
- 3.Surface: Powder-coated
- 4.Operating temperature: -40°C~+125°C
- 5.Degree of protection acc.to DIN EN60529 for coupled connector:IP65
- 6.Outgoing direction:Side outgoing line
- 7.Thread specifications:M/PG
- 8.Hoods&Housings seal:NBR
- 9.Undimensioned Tolerances:

| Pitch Range In mm | Nominal Dimension Range In mm | 0.1/10 |
|-------------------|-------------------------------|--------|
| TO 6              | Over 30 TO 60                 | 0.1/10 |
| TO 10             | Over 60 TO 100                | 0.1/10 |
| TO 24             | Over 100 TO 150               | 0.1/10 |
| ±0.15             | ±0.30                         | ±2°    |

## HOW TO ORDER:

S16B-BM-1L.M

- Locking lever — 1L: 1 levers(plastic) 2B:2 bolts  
2L: 2 levers(plastic) 4B:4 bolts  
1L.M: 1 levers(Metal)  
2L.M: 2 levers(Metal)
- Housing type — SE: Side entry  
SEH: Side entry-high construction  
TE: Top entry  
TEH: Top entry-high construction  
BM: Bulkhead mounted  
SM: Sueface mounted  
SMH: Sueface mounted-high construction  
CC: Cable to cable  
CCH: Cable to cable high construction
- Sereies — S3A: 3A Compact type  
S10A: 10A Compact type  
S16A: 16A Compact type  
S32A: 32A Compact type  
S6B: 6B Standard type  
S10B: 10B Standard type  
S16B: 16B Standard type  
S24B: S24B Standard type  
S32B: S32B Standard type  
S48B: S48B Standard type

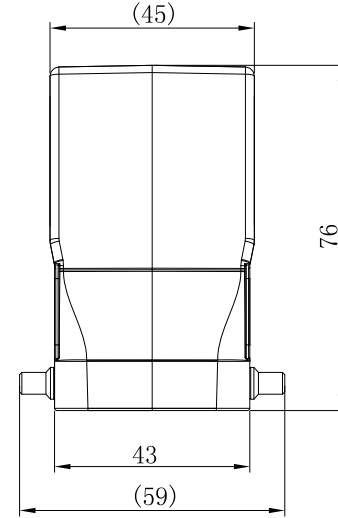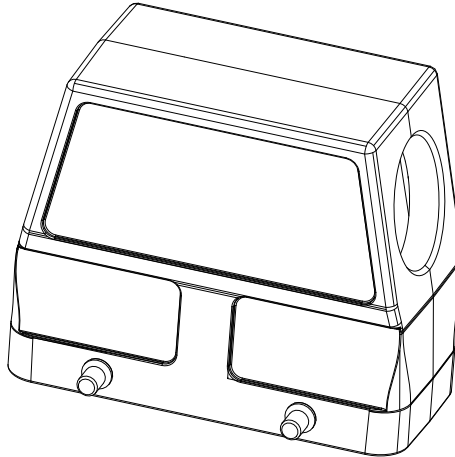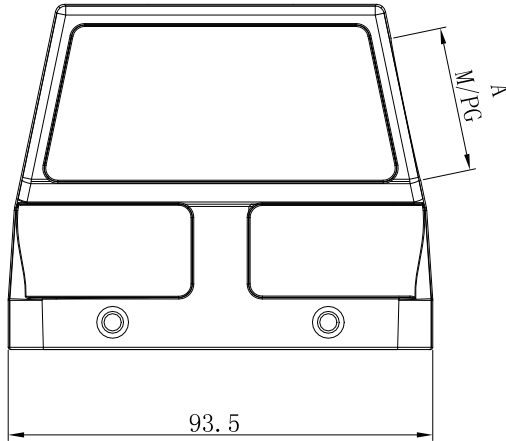

| Order number     | A       |
|------------------|---------|
| S16B-SEH-4B-M25  | M25×1.5 |
| S16B-SEH-4B-M32  | M32×1.5 |
| S16B-SEH-4B-M40  | M40×1.5 |
| S16B-SEH-4B-PG21 | PG21    |
| S16B-SEH-4B-PG29 | PG29    |

| Order No. | S16B-SEH-4B-XXX | Name       | S16B边出线高结构四耳上壳 | Tolerance        | Surface |
|-----------|-----------------|------------|----------------|------------------|---------|
| Item      | Signature       | Date       |                | Tolerances Table | VDI21   |
| Design    | CHH             | 2024.07.17 | Drawing No.    | 版本号              | 重量      |
| Check     | CHH             | 2024.07.17 | Material       | M0               | 比例      |
| Process   | -               | -          | 物料号            | 第1页/共1页 1 of 1   | Scale   |
| Unify     | -               | -          | Item No.       | ...              | 1:1     |
| Approve   | XJ              | 2024.07.17 |                |                  |         |

SUPU 宁波普普电子有限公司  
NINGBO SUPU ELECTRONICS CO.,LTD.